



## FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93    Fax: +86-755-29631181    E-mail: [info@fenixlight.com](mailto:info@fenixlight.com)    Web: [www.fenixlight.com](http://www.fenixlight.com)  
Address: 2F/3F, West of Building A, Xinghong Technology Park, 111 Shuiku Road, Fenghuanggang Community, Xixiang Street,  
Bao'an District, Shenzhen City, Guangdong Province, China

61.599.991.018-A1-20241127

# FENIX

**2025**  
**PRODUCT**  
**CATALOG**



# BRAND OVERVIEW

# FENIX

**Fenix** > Founded in 2001, Fenix has developed into a leading high-tech enterprise, specializing in the R&D, manufacturing, sales, and marketing of mobile lighting products including flashlights, tactical lights, headlamps, bicycle lights, lanterns, and lighting accessories. Our products are widely used in a variety of use cases, including EDC(everyday carry), hiking, caving, riding, hunting, search and rescue, military and police patrols, security, and industrial works.

Since Fenix was founded, we have received acclaim and recognition from users across the globe for our excellent product and customer service, and we are committed to becoming the world's leading mobile lighting brand.

2001

Establishment


120+

Countries and regions

10M+

Consumer users

# WORLDWIDE SALES NETWORK

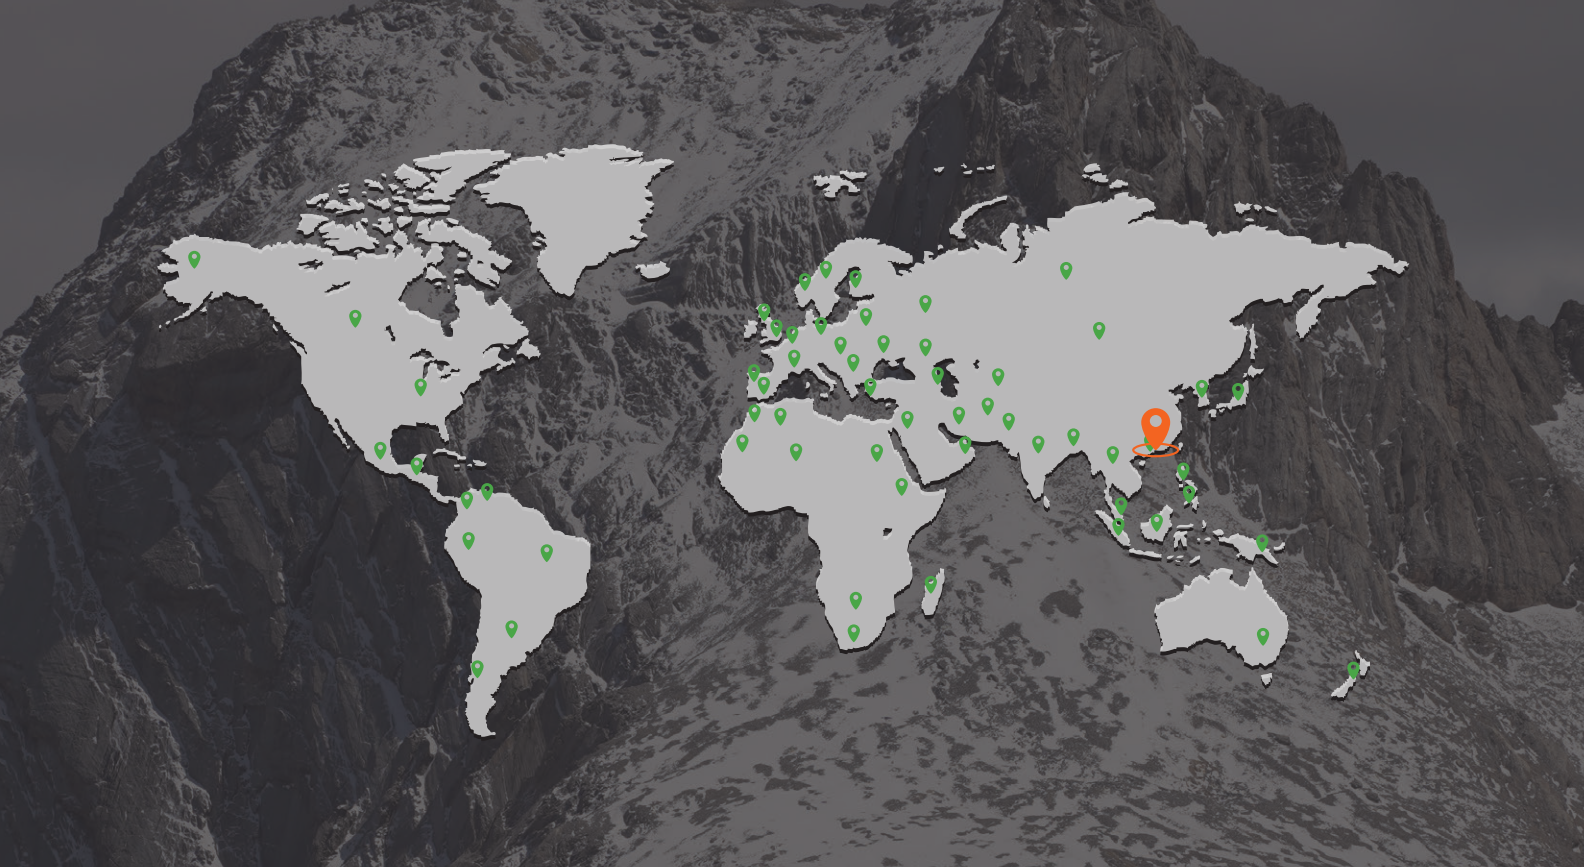

Fenix products are now being sold in many mainstream sales channels in domestic and overseas.






- REI - The world's largest outdoor chain channel.
- Grainger - The largest industrial chain channel in the United States.
- Dick's Sporting Goods - The largest outdoor chain channel in the United States.
- Sportsman's Warehouse - Outdoor sporting goods retailer.
- Galls - Leading chain store of public safety equipment and uniforms.
- Bass Pro Shops - The Best in Fishing, Hunting and Boating Gear.
- Frankonia - The largest hunting chain channel.
- MediaMarkt - The largest multinational chain of stores selling consumer electronics.
- MEC - Canada's largest outdoor chain channel.
- Bever - The largest outdoor chain channel in the Netherlands.
- Tiexuejunpinxing - China's most well-known military product chain store.
- Sanfu Outdoor - the largest outdoor chain channel.
- Firefox Outdoor, Zhongjiahe Outdoor, etc.











# INDEX

## 01 FLASHLIGHTS

<b>E Series</b>	(EDC Flashlights)		- - - - -	06
<b>LD Series</b>	(Professional Outdoor Flashlights)		- - - - -	12
<b>PD Series</b>	(Portable High-performance Flashlights)	 	- - - - -	16
<b>TK Series</b>	(Tough and Powerful Flashlights)	 	- - - - -	25
<b>HT Series</b>	(Hunting Flashlights)		- - - - -	30
<b>LR Series</b>	(Searching Flashlights)		- - - - -	32
<b>S Series</b>	(Specialized Flashlights)		- - - - -	37
<b>WF Series</b>	(Industrial Flashlights)		- - - - -	39
<b>WT Series</b>	(Multifunctional Work Lights)		- - - - -	43

## 02 HEADLAMPS

<b>HL Series</b>	(Lightweight Outdoor Headlamps)		- - - - -	46
<b>HM Series</b>	(All-metal High-performance Integrated Headlamps)	 	- - - - -	49
<b>HP Series</b>	(High-performance Separated Headlamps)	 	- - - - -	56
<b>WH Series</b>	(High-performance Industrial Headlamps)		- - - - -	59

## 03 TACTICAL LIGHTS

<b>GL Series</b>	(Professional Tactical Lights)	 	- - - - -	61
------------------	--------------------------------	---	-----------	----

## 04 BICYCLE LIGHTS

<b>BC Series</b>	(High-performance Bicycle Lights)		- - - - -	65
------------------	-----------------------------------	---	-----------	----

## 05 CAMPING LANTERNS

<b>CL Series</b>	(High-performance Camping Lanterns)		- - - - -	70
------------------	-------------------------------------	---	-----------	----

## 06 ACCESSORIES

<b>Accessories</b>	- - - - -	74
<b>Accessories Compatibility Guide</b>	- - - - -	83
<b>Fenix Products Specification Chart</b>	- - - - -	89

## 07 BRAND HONOR

<b>Prizes</b>	- - - - -	97
<b>Brand Mission</b>	- - - - -	99
<b>Customer Service</b>	- - - - -	101

\*There may be some differences between the upcoming product and its finally listed version.



# FLASHLIGHTS

E / LD / PD / TK / HT / LR / S / WF / WT

**Fenix flashlights** are specifically designed for all kinds of harsh environments. All flashlight products fully embody toughness, reliability, and user-friendliness. Fenix makes a flashlight that can fit any need, whether it is tactical law enforcement, industrial operations, searching and rescuing or outdoor hiking. Excellent ability to withstand harsh conditions, easy to use, and comfortable grip, all of which make Fenix flashlights stand out from our competitors.

# E SERIES



E01 V2.0



E03R V2.0



E05R



E06R



E09R



E12 V3.0



E18R V2.0



E20 V2.0



E28R V2.0



E35R




# E01 V2.0

Mini Keychain Flashlight

- ★ Ultra-compact size for everyday carry.
- ★ One-handed operation with the rotating switch.
- ★ All-metal CNC machining light body.
- ★ Two colors for option.

Black Blue



Size: 2.62" x 0.59" x 0.55"/66.5 x 15 x 14 mm.  
Weight: 0.46 oz /13 g (excluding battery).  
Product ID: E01.11117  
E01.13117

# E05R

Rechargeable Mini Keychain Flashlight

- ★ Mini size for perfect everyday carry.
- ★ Instant Burst.
- ★ Hidden micro USB charging port.
- ★ All-metal CNC precision processing.

Green Black Brown




Size: 2.68" x 0.60" x 0.59"/68 x 15.3 x 15 mm.  
Weight: 0.85 oz/24 g (including battery).  
Product ID: E05R.11111  
E05R.17111  
E05R.14111

# E06R

Triple Light Sources High-performance  
Keychain Flashlight

- ★ Max 700 lumens output and 110 meters beam distance.
- ★ White light, UV light, and red laser for various lighting needs in daily use.
- ★ USB Type-C rechargeable.
- ★ Atmosphere light and stylish appearance.
- ★ Magnetic tail for hands-free use.

Grey Green

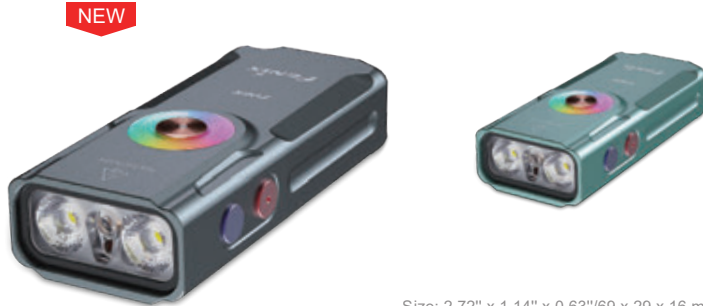

Size: 2.72" x 1.14" x 0.63"/69 x 29 x 16 mm.  
Weight: 1.90 oz/54 g (including battery).  
Product ID: E06R.12111  
E06R.14111

# E03R V2.0

All-metal Keychain Flashlight

Grey Blue



ISPO  
Award  
2023



Compact size for everyday carry.  
USB Type-C rechargeable.  
Red warning light.  
Breathing indicator with variable color.

Size: 2.07" x 1.02" x 0.51"/52.5 x 26 x 13 mm.  
Weight: 1.06 oz /30 g (including battery).  
Product ID: E03R.13112, E03R.12111


	High	Med	Low	Eco	Red	Red Flash	Breathing Light
Output	500 lumens	150 lumens	30 lumens	5 lumens	5 lumens	5 lumens	1 lumen
Runtime	1 hour 20 minutes	2 hours	6 hours 35 minutes	30 hours	/	/	/



# E09R

Rechargeable Mini High-output Flashlight

- ✦ Max 600 lumens output and 124 meters beam distance.
- ✦ Hidden USB Type-C charging port.
- ✦ All-metal CNC precision processing.
- ✦ Ultra-compact size for convenient carrying every day.



Size: 3.11" x 0.76" x 0.72"/79 x 19.3 x 18.4 mm.  
Weight: 1.59 oz/45 g (including battery).  
Product ID: E09R.11111

# E12 V3.0

Portable EDC Flashlight

- ✦ Magnetic tail for hands-free use.
- ✦ No standby current, safe and cost-efficient.
- ✦ Tail switch for on/off function and output selection.
- ✦ Two-way body clip and tail standing capability for added convenience.



Size: 3.21" x 0.76" x 0.69"/81.5 x 19.3 x 17.4 mm.  
Weight: 1.90 oz/53.9 g (including battery).  
Product ID: E12.11118


# E18R V2.0

Ultra-compact High-performance EDC Flashlight

- ✦ Max 1200 lumens output.
- ✦ USB Type-C fast charging.
- ✦ Magnetic tail - eliminates hand fatigue.
- ✦ Electronic lockout + physical lockout.
- ✦ Two-position body clip for convenient carry.



HOT



Size: 2.64" x 0.87" x 0.87"/67 x 22 x 22 mm.  
Weight: 1.98 oz/56 g (including battery).  
Product ID: E18R.11112

# E20 V2.0

Compact EDC Flashlight

- ✦ Max 350 lumens output and 126 meters beam distance.
- ✦ One-handed operation with the tail switch.
- ✦ Digitally regulated circuit for maintaining a stable output.
- ✦ Intelligent overheat protection and reverse polarity protection.



Size: 5.00" x 0.83" x 0.66"/127 x 21 x 16.8 mm.  
Weight: 1.48 oz/42 g (excluding battery).  
Product ID: E20.11114

Utility Model patent: ZL 201820183805.8



# E28R V2.0

Rechargeable EDC Flashlight

- ✦ Max 1700 lumens output and 273 meters beam distance.
- ✦ Magnetic tail for hands-free use.
- ✦ Two-way body clip for versatile attachment.
- ✦ USB Type-C charging; 3 hours from depletion to fully charged.
- ✦ Unique warning light.



Size: 4.76" x 1.04" x 0.89"/121 x 26.5 x 22.5 mm.  
Weight: 4.52 oz/128 g (including battery).  
Product ID: E28R.11113

# E35R

High-performance EDC Flashlight

- ✦ Max 3100 lumens output.
- ✦ USB Type-C charging port.
- ✦ Magnetic base for hands-free use.
- ✦ Lockout function avoids accidental activation.



Size: 4.72" x 1.04" x 0.98"/120 x 26.5 x 24.8 mm.  
Weight: 5.22 oz/148 g (including battery).  
Product ID: E35R.11111

# LD SERIES



LD12R



LD22 V2.0



LD30R



LD35R



LD45R





# LD12R

Dual Light Sources Multipurpose Portable Flashlight

- ✦ Max 600 lumens output and 186 meters beam distance.
- ✦ Rotate the light head to quickly choose between the main light and the side light.
- ✦ Magnetic body clip for hands-free use.
- ✦ Hidden Type-C charging port.

Utility Model Patent: ZL 202223499611.4



Size: 4.76" x 0.87" x 0.75"/121 x 22 x 19 mm  
Weight: 2.61 oz/74 g (including battery)  
Product ID: LD12R.11111

# LD30R

High-performance Outdoor Flashlight

- ✦ Max 1700 lumens output and 267 meters beam distance.
- ✦ Tactical tail switch for instant activation.
- ✦ Side switch for mode selection.
- ✦ Strobe mode and SOS mode for outdoor activities.
- ✦ Two-way body clip for versatile attachment.



Size: 5.11" x 1.04" x 0.89"/129.7 x 26.5 x 22.6 mm.  
Weight: 4.66 oz/132 g (including battery).  
Product ID: LD30R.11111

# LD22 V2.0

Multi-purpose Outdoor Flashlight

- ✦ Max 800 lumens output and 214 meters beam distance.
- ✦ Powered by a 1600mAh rechargeable Li-ion battery pack, compatible with 2 x AA batteries.
- ✦ Dual body clip for easy carry.
- ✦ Instant on with the tactical tail switch and output selection with the side switch.



Size: 5.83" x 0.85" x 0.71" / 148 x 21.5 x 18 mm.  
Weight: 3.49 oz / 99 g (including battery).  
Product ID: LD22.11113

# LD35R

Multipurpose Vehicle Flashlight

- ✦ 1700 lumens maximum output, 340 meters maximum beam distance.
- ✦ Main white light, side white light, yellow fog light and red warning light.
- ✦ Included body clip and magnetic tail for hands-free use.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Clay breaking tips for window breaking in emergencies.

NEW



Size: 5.37" x 1.34" x 1.00"/136.4 x 34 x 25.4 mm.  
Weight: 6.49 oz/184 g (including battery).  
Product ID: LD35R.11111



# LD45R

Digital Focusing Flashlight

  
2800LM

  
480M

  
65H

  
IP68

  
1X21700 5000mAh



Digital focusing technology enables precise adjustments between spotlight and floodlight with a single hand.  
OLED smart display informs users of the flashlight's current status.  
Inner waterproof USB Type-C charging port.  
SOS mode and strobe mode enhance safety during outdoor activities.

Size: 6.11" x 1.75" x 1.26"/155.3 x 44.5 x 32 mm.  
Weight: 10.65 oz/302 g (including battery).  
Product ID: LD45R.11111

General Mode					Flash Mode	
Turbo	High	Med	Low	Eco	Strobe	SOS
2800 lumens	1000 lumens	350 lumens	150 lumens	20 lumens	2800 lumens	150 lumens
2 hours 40 minutes	2 hours 50 minutes	6 hours 40 minutes	16 hours 40 minutes	65 hours	/	/

# PD SERIES



HOT



PD25R



PD32R

HOT



PD35 V3.0



PD35R



PD36R V2.0



PD36 TAC

HOT



PD36R Pro



PD40R V3.0

NEW



PD45R



# STAR TACTICAL FLASHLIGHTS

Fenix PD Series has become a classic since its release. It is deeply loved by users as being compact, portable, and multipurpose.

## PD32R

High-output Rechargeable Tactical Flashlight

- ★ Included a 3400mAh battery, compatible with two CR123A batteries.
- ★ Hidden USB Type-C charging port.
- ★ Silent multi-function tail switch for instant activation, lockout function and instant strobe.



1400LM

344M

70H

IP68

1X18650 3400mAh  
2 X CR123A

Size: 5.31" x 1.04" x 0.93"/135 x 26.5 x 23.6 mm.  
Weight: 4.80 oz/136 g (including battery).  
Product ID: PD32R.11111,PD32R.17111

## PD35R

Compact Rechargeable Tactical Flashlight

- ★ Max 1700 lumens output.
- ★ Luminus SFT40 LED with max 353 meters beam distance.
- ★ Inner waterproof USB Type-C charging port.
- ★ Dual tail switch.



1700LM

353M

100H

IP68

1X18650 3400mAh

Size: 5.35" x 1.00" x 0.91" / 136 x 25.4 x 23.2 mm.  
Weight: 4.94 oz / 140 g (including battery).  
Product ID: PD35R.11111

## PD25R

Portable Rechargeable Flashlight

Black Sierra green

800LM

250M

80H

IP68

1X16340 800mAh  
/1XCR123A



Hidden USB Type-C charging port.  
Included two-position body clip.  
Instant on with the tactical tail switch and output selection with the side switch.

Size: 3.62" x 0.94" x 0.94/92 x 24 x 24 mm.  
Weight: 2.75 oz/78 g (including battery).  
Product ID: PD25R.11111, PD25R.14111

General Mode					Strobe
Turbo	High	Med	Low	Eco	
800 lumens	350 lumens	150 lumens	30 lumens	5 lumens	800 lumens
55 minutes	1 hour 40 minutes	3 hours 30 minutes	20 hours 40 minutes	80 hours	/



# PD35 V3.0

High-performance Tactical Flashlight

- ✦ New long-distance LED.
- ✦ Pocket size for easy carry.
- ✦ Boot-up battery level indication and low-voltage warning.
- ✦ Instant activation with the tactical tail switch and output selection with the side switch.

Black Tropic green



HOT



Size: 5.28" x 1.00" x 0.90"/134 x 25.4 x 22.8 mm.  
Weight: 4.69 oz/133 g(including battery).  
Product ID: PD35.11122, PD35.14122

# PD36R V2.0

Compact Rechargeable Tactical Flashlight

- ✦ Neck-mounted Type-C charging port supports 18W fast charging.
- ✦ Tactical tail switch for instant activation; side switch for brightness level selection.
- ✦ Included two-way body clip for versatile attachment.



Size: 5.54" x 1.04" x 1.00"/140.7 x 26.5 x 25.5 mm.  
Weight: 5.89 oz/167 g (including battery).  
Product ID: PD36R.11115

# PD36 TAC

Mechanical Tactical Flashlight

- ✦ Max 3000 lumens output and 274 meters beam distance.
- ✦ Powered by a single 21700 rechargeable Li-ion battery.
- ✦ Tactical and duty modes for different environments.
- ✦ Dual-function tactical switch to accurately activate the tactical function.
- ✦ Lockout function avoids accidental activation.

Utility Model Patent: ZL 201920500579.6



Size: 5.51" x 1.04" x 1.00" / 140 x 26.5 x 25.4 mm.  
Weight: 3.24 oz / 92 g (excluding battery).  
Product ID: PD36.11111

# PD40R V3.0

Super Bright Mechanical Rotary Switching Flashlight

- ✦ Max 3000 lumens output and 500 meters beam distance.
- ✦ Powered by a single Fenix ARB-L21-5000 V2.0 battery.
- ✦ Patented technique of rotary mode selection switching for accurate operation.
- ✦ Standard USB Type-C charging port.
- ✦ Capable of tail standing.

Utility Model Patent: ZL 201821227065.X



Size: 5.63" x 1.34" x 1.02" / 143 x 34 x 26 mm.  
Weight: 6.98 oz / 198 g (including battery).  
Product ID: PD40R.11113



# PD36R Pro

Heavy-duty Rechargeable Tactical Flashlight

  
2800LM

  
380M

  
42H

  
IP68

  
1X21700 5000mAh



USB Type-C charging.

Instant activation and instant strobe with dual tactical tail switch.

Momentary-on Strobe.

Included a 5000mAh battery.

Size: 5.74" x 1.04" x 1.01 "/145.8 x 26.5 x 25.7mm.  
Weight: 5.96 oz/169 g (including battery).  
Product ID: PD36R.11113, PD36R.22113

Turbo	High	Med	Low	Eco	Strobe
2800 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	2500 lumens
3 hours 30 minutes	3 hours 55 minutes	8 hours 15 minutes	19 hours	42 hours	/

# PD45R

Tactical Flashlight With Multiple Self-Defined Modes

  
3300LM

  
413M

  
55H

  
IP68

  
1X21700 6000mAh



Max 3300 lumens output and 413 meters beam distance.

Mode selector ring for mode switching.

Customize your own lighting mode by selecting from the six preset brightness levels in SET mode.

Hidden USB Type-C charging port.

Size: 6.22" x 1.18" x 1.02"/158 x 30 x 26 mm.  
Weight: 7.05 oz/200 g (including battery).  
Product ID: PD45R.11111

Turbo	Ultrahigh	High	Med	Low	Eco	Strobe
3300 lumens	1400 lumens	600 lumens	300 lumens	100 lumens	30 lumens	3300 lumens
3 hours	3 hours 48 minutes	5 hours	9 hours	28 hours	55 hours	/





# TK SERIES

## TK05R

Portable Tactical EDC Flashlight



- ★ Inner waterproof USB Type-C charging port.
- ★ Instant strobe.
- ★ 1000 lumens maximum output, 450 meters maximum beam distance.
- ★ Powered by one Fenix ARB-L18-1100 rechargeable battery.



Size: 4.53" × 1.26" × 0.93" / 115 × 32 × 23.5 mm  
Weight: 4.37 oz / 124 g(including battery)  
Product ID: TK05R.11111

## TK11R

Compact Military And Duty Flashlight



- ★ Max 1600 lumens output and 420 meters beam distance.
- ★ Uses one Luminus SFT40 LED with a lifespan of 50,000 hours.
- ★ Powered by a single 18650 rechargeable battery.
- ★ Inner waterproof USB Type-C charging port.
- ★ One-handed operation with the dual tail switch.
- ★ Instant strobe.



Size: 5.73" x 1.34" x 0.93" / 145.5 x 34 x 23.5 mm.  
Weight: 4.14 oz / 117.5 g (excluding battery).  
Product ID: TK11R.11111



TK05R



TK11R



TK16 V2.0



TK17



TK20R V2.0



TK21R



TK22R



TK25R



TK26R



TK30R



TK35R



TK35UE V2.0





# TK20R V2.0

Rechargeable Dual Rear-switch Multipurpose Flashlight



3000LM



475M



48H



IP68



1X21700 5000mAh

STAR TACTICAL FLASHLIGHT



- Instant strobe.
- Inner waterproof port.
- Dual tactical tail switch.
- Hidden USB Type-C charging port.

Utility Model Patent:ZL 201920500579.6  
Size: 6.02" x 1.34" x 1.00"/152 x 34 x 25.4 mm.  
Weight: 7.20 oz/204 g (including battery).  
Product ID: TK20R.11113

Turbo	High	Med	Low	Eco	Strobe
3000 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	3000 lumens
2 hours 50 minutes	3 hours 10 minutes	7 hours	21 hours 20 minutes	48 hours	/

# TK16 V2.0

Dual Tail Switch Tactical Flashlight

- Max 3100 lumens output.
- Advanced Pulse-Frequency Transmission System (APF).
- Instant activation and strobe with the dual tail switch.
- Compact structure with a single-layer body.
- Stainless steel strike bezel inlaid tungsten steel breaking tips.

Black

Tropic green



HOT

Invention Patent: 201910294670.1  
Utility Model Patent: ZL 201920500579.6  
Size: 5.63" x 1.34" x 1.00" / 143 x 34 x 25.4 mm.  
Weight: 3.95 oz / 112 g (excluding battery).  
Product ID: TK16.11112, TK16.14113

# TK17

Dual Tail Switch Tactical Flashlight

- Max 3400 lumens output and 350 meters beam distance.
- Powered by an included ARB-L21-6000B large-capacity battery.
- Dual tail switch for instant strobe and instant activation.
- Stainless steel strike bezel inlaid three tungsten steel breaking tips.



NEW

Size: 5.71" x 1.42" x 1.00"/145 x 36 x 25.4 mm.  
Weight: 4.23 oz/120 g (excluding battery).





# TK21R

Rechargeable Dual Tail Switch Tactical Flashlight

- ✦ Max 3500 lumens output and 470 meters beam distance.
- ✦ USB Type-C charging port supports fast charging protocol.
- ✦ Dual tail switch for instant strobe and instant activation.
- ✦ Stainless steel strike bezel inlaid tungsten steel breaking tips.



NEW

3500LM

470M

52H

IP68

1X21700  
6000mAh

Size: 6.10" x 1.42" x 1.00"/155 x 36 x 25.4 mm.  
Weight: 7.41 oz/210 g (including battery).

# TK22R

Tactical And Duty Flashlight

- ✦ Max 3200 lumens output and 480 meters beam distance.
- ✦ Patented FlexiSensa Control switch for fast and convenient operation.
- ✦ Tactical and Duty modes for additional flexibility.
- ✦ Dual-function tactical switch for instant tactical activation and output selection.
- ✦ Hidden USB Type-C charging port.
- ✦ Stainless steel strike bezel inlaid tungsten steel breaking tips.



3200LM

480M

50H

IP68

1X21700  
5000mAh

Utility Model Patent: ZL 202321315946.8  
Size: 6.22" x 1.57" x 1.00" / 158 x 40 x 25.4 mm.  
Weight: 7.69 oz / 218 g (including battery).  
Product ID: TK22R.11111

# TK25R

Law-enforcing Warning Flashlight

- ✦ Max 3400 lumens output and 410 meters beam distance.
- ✦ Instant strobe and instant activation.
- ✦ Select among three output levels of multi-function mode with the toggle switch.
- ✦ UV light, red and blue warning lights, and side white light for various lighting needs in law-enforcement operations and patrols.
- ✦ Lockout function avoids accidental activation.



NEW

3400LM

410M

50H

IP68

1X21700  
5000mAh/6000mAh

Size: 6.22" x 1.42" x 1.02"/158 x 36 x 26 mm.  
Weight: 7.76 oz/220 g (including battery).

# TK35R

High-performance Dual Mode Tactical Flashlight

5400LM

600M

IP68

2X18650



Max 5400 lumens output and 600 meters beam distance.  
UV light source for improved tactical applications.  
Dual tail switches for instant strobe and instant activation.  
Powered by two 18650 batteries for long-lasting runtime.  
USB Type-C port supports fast charging.

Size: 6.10" x 1.69" x 1.69"/155 x 43 x 43 mm.    Weight: 8.73 oz/247.5 g (excluding battery).  
Product ID: TK35R.11111



# TK26R

Tri-colored Tactical Law-enforcing Flashlight

- ✦ Max 1500 lumens output and 350 meters beam distance.
- ✦ Red, white, and green light sources.
- ✦ Instant strobe with the dual tail switch.
- ✦ Inner waterproof USB Type-C charging port.



Size: 5.91" x 1.57" x 1.00" / 150 x 40 x 25.4 mm.  
Weight: 5.54 oz /157 g (excluding battery).  
Product ID: TK26R.11112

# TK30R

White Laser Tactical Flashlight

- ✦ Max 500 lumens output and 1500 meters beam distance.
- ✦ White laser light source.
- ✦ Tactical tail switch for instant activation and instant strobe.
- ✦ Hidden USB Type-C charging port.
- ✦ Toggle switch for output selection and lockout function.



NEW



Size: 7.24" x 1.00" x 1.57"/184 x 25.4 x 40 mm.  
Weight: 8.82 oz/250 g (including battery).  
Product ID: TK30R.11111

# TK35UE V2.0

High-performance Dual Mode Tactical Flashlight

- ✦ Patented toggle switch for the selection of tactical and duty modes.
- ✦ Max 5000 lumens output.
- ✦ Dual tactical tail switch.
- ✦ Instant strobe.
- ✦ The light can be powered by a single 18650 or two CR123A batteries in emergency situations.



HOT



Size: 5.63" x 1.69"/ 143 x 43 mm.  
Weight: 7.13 oz / 202 g (excluding battery).  
Product ID: TK35.11122

Utility Model Patent: ZL 201721574627.3

# HT SERIES



# HT18R

Long-range Hunting Flashlight

- ✦ Max 2800 lumens output and 1100 meters beam distance.
- ✦ Included red and green filter adapters, offering triple-colored lighting.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Instant strobe with dual tail switch.



Size: 7.42" x 2.68" x 1.00"/188.5 x 68 x 25.4 mm.  
Weight: 8.91 oz/252.7 g (excluding battery).  
Product ID: HT18R.11111





# LR SERIES

## HT32

Outdoor Hunting Flashlight

- ✦ Max 2500 lumens output and 640 meters beam distance.
- ✦ Fitted with one Luminus SFT20 CG green light LED and one SFT20 RA red light LED.
- ✦ Patented TIR lens doubles the beam distance with its diameter reduced by 30%.
- ✦ One-handed operation with the dual tail switch.
- ✦ Instant strobe.



Utility Model Patent: ZL 202222108357.5  
Size: 6.30" x 2.05" x 1.00" / 160 x 52 x 25.4 mm.  
Weight: 6.53 oz / 185 g (excluding battery).  
Product ID: HT32.11111

NEW



LR35R Pro

NEW



LR36R



LR40R V2.0

HOT



LR50R

LR60R

HOT



LR80R



# LR35R Pro

Powerful Mid-size Searching Flashlight

- ✦ Max 10000 lumens output and 550 meters beam distance.
- ✦ Floodlight and spotlight for long-range illumination and close-up illumination.
- ✦ Toggle switch for stepless brightness regulation; electronic switch for mode switching, Strobe mode and lockout function.
- ✦ USB Type-C charging port; 18W fast charging and discharging.
- ✦ Mid-size light body for easy carry.
- ✦ UV light and red light for different applications.



# LR36R

White Laser Powerful Mid-size Searching Flashlight

- ✦ White laser and floodlight for long-range illumination and close-up illumination.
- ✦ OLED smart display shows the remaining runtime, brightness level, and battery level.
- ✦ Stepless brightness regulation for smooth and accurate control of brightness level.
- ✦ Toggle switch and electronic switch combo for convenient and efficient operation.
- ✦ Toggle switch lockout function avoids accidental activation.



# LR40R V2.0

Super Bright Spot-and-flood Searching Flashlight

- ✦ Max 15000 lumens output and 900 meters beam distance.
- ✦ Rotary toggle switch and an electronic switch for single-handed operation.
- ✦ Spotlight, floodlight and combined modes for different lighting demands.
- ✦ USB Type-C port supports 18W fast charging and USB-A port supports discharging.



# LR50R

Multifunctional Super Bright Searching Flashlight


- ✦ Max 12000 lumens output and 950 lumens beam distance.
- ✦ Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- ✦ Instant Turbo activation rapidly responds to emergency situations.
- ✦ USB Type-C charging and discharging interface supports fast-charging protocols.








# LR60R


Mechanical Rotary Searching Flashlight

21000LM

1085M

113H

IP68

14.4V/4000mAh



Mechanical rotary switch for rapid brightness and mode selection.

OLED screen displays brightness level, remaining runtime and remaining battery level.

Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.

Size: 8.19" x 3.59" x 2.46"/208 x 91 x 62.5 mm.  
Weight: 52.91 oz/1500 g (including battery).  
Product ID: LR60R.11111

Search Mode(Long range searching)					Camp Mode(Large area lighting)				
Turbo	High	Med	Low	Eco	Med	High	Turbo	SOS	Strobe
Spot-and floodlight	Spotlight				Floodlight			Spotlight	Spot-and floodlight
21000 lumens	3000 lumens	1000 lumens	300 lumens	50 lumens	2000 lumens	6000 lumens	15000 lumens	300 lumens	9000 lumens
1 hour 50 minutes	3 hours 45 minutes	10 hours 40 minutes	24 hours 20 minutes	113 hours	5 hours 25 minutes	3 hours	2 hours 10 minutes	/	/

# LR80R

Super Bright Handheld Searchlight

18000LM

1130M

300H

IP68

7.2V/12000mAh

HOT



Size: 10.20" x 4.25" x 2.13" / 259 x 108 x 54 mm.  
Weight: 57.71 oz / 1636 g (including battery).  
Product ID: LR80R.11115, LR80R.11112, LR80R.11113, LR80R.11111, LR80R.11114

- ✦ High output, far-reaching beam shot, long-lasting runtime for wide-range searching lighting.
- ✦ Dual switch respectively controls dual mode.
- ✦ Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- ✦ Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.
- ✦ Can be used as a power bank for external digital devices.







# SW05R-UV

Multipurpose Clip-on Light

- ✦ Included body clip is designed to accommodate various widths for secure attachment.
- ✦ White and UV light sources.
- ✦ 200°adjustable head for use at different angles.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Magnetic tail for hands-free use.

Black Military green



Size: 3.20" x 1.38" x 0.71"/81.2 x 35 x 18 mm.  
Weight: 1.94 oz/55 g (including battery).  
Product ID: SW05R-UV.11111,SW05R-UV.14111

# SW05R-RED

Multipurpose Clip-on Light

- ✦ Included body clip is designed to accommodate various widths for secure attachment.
- ✦ White and red light sources.
- ✦ 200°adjustable head for use at different angles.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Magnetic tail for hands-free use.

Black Military green



Size: 3.20" x 1.38" x 0.71"/81.2 x 35 x 18 mm.  
Weight: 1.94 oz/55 g (including battery).  
Product ID: SW05R-RED.11111,SW05R-RED.14111



# WF SERIES



## PROFESSIONAL EXPLOSION-PROOF FLASHLIGHTS

The **Fenix explosion-proof flashlights** are designed and manufactured in accordance with the international explosion-proof standard of the IECEx system, which has passed the necessary tests and was certified by IECEx, ATEX and CSA. Thus these products can be safely used in explosive gas and dust atmospheres, users feel relieved when working in flammable and explosive places.



### WF05E

Intrinsically Safe Flashlight  
(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)



- ✦ Intrinsically explosion-proof.
- ✦ It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- ✦ Three output levels, max 85 lumens.
- ✦ The body clip is made of explosion-proof anti-static plastic.



Size: 5.29" x 0.75" x 0.59" / 134.5 x 19 x 14.9 mm.  
Weight: 1.34 oz / 38 g (excluding batteries).  
Product ID: WF05E.11112

### WF11E

Magnetic Explosion-proof Flashlight  
(Can be safely used in Zone 0, Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 20, Zone 21 and Zone 22 as well)



- ✦ Intrinsically explosion-proof.
- ✦ Made of explosion-proof and anti-static plastics.
- ✦ Magnetic light tail and body clip.
- ✦ It has passed the necessary tests and was certified by IECEx, ATEX and SGS.



Size: 6.59" x 1.93" x 0.94" / 167.5 x 49 x 24 mm.  
Weight: 5.64 oz / 160 g (excluding batteries).  
Product ID: WF11E.15117, WF11E.15116



WF05E



WF11E



WF25RM



WF26R



WF30RE



# WF25RM

Multifunctional Cradle Charging Duty Flashlight

- ✦ Max 3000 lumens output and 370 lumens beam distance.
- ✦ 365nm UV light for non-destructive testing, leak testing, and other specialized operations.
- ✦ Proximity downshift safety function to avoid danger caused by high temperatures.
- ✦ Rechargeable with the included magnetic charging cradle, which is also compatible with the WF26R flashlight.
- ✦ Tail hook allows for easy and hands-free carrying.



# WF26R

High-performance Cradle Charging Duty Flashlight

- ✦ Max 3000 lumens output and 450 meters beam distance.
- ✦ The magnetic charging cradle can be separated from the magnetic charging cable.
- ✦ Instant activation and instant strobe with dual tail switch.
- ✦ Boot-up battery level indication and low-voltage warning.



# WF30RE

Zone 1 Explosion-proof Flashlight



Can be safely used in Zone 1 and can be used in combustible dust area: Zone 21.

Upgraded 3200mAh large-capacity explosion-proof battery ensures long-lasting runtime.

USB Type-C port for convenient charging. Max 300 lumens output.

Size: 5.97" x 1.34" x 1.10"/151.7 x 34 x 28 mm. Weight: 7.69 oz/218 g (including battery). Product ID: WF30RE.11125, WF30RE.11126, WF30RE.11127, WF30RE.11128, WF30RE.11129

Turbo	High	Med	Low
300 lumens	200 lumens	100 lumens	5 lumens
6 hours 41 minutes	10 hours 57 minutes	21 hours	320 hours



# WT SERIES



## WT16R

Multipurpose And Rechargeable Work Light

- ✦ Combines spotlight, floodlight and yellow flash in one.
- ✦ Super magnets are placed in the back and tail of the light for metal connection.
- ✦ Widened stainless steel body clip for firm connection to pack and pocket.
- ✦ Battery level indication for instant checking of remaining battery level.



Size: 5.00" x 1.46" x 1.02" / 127 x 37 x 26 mm.  
Weight: 4.55 oz / 129 g (including battery).  
Product ID: WT16R.11111

## WT25R

Rechargeable Pivoting Work Light

- ✦ Max 1000 lumens output and 220 meters beam distance.
- ✦ 105° adjustable head for use at different angles.
- ✦ Magnetic tail for hands-free use.
- ✦ Magnetic charging with the included magnetic charging cable.



Size: 5.33" x 1.16" x 0.95" / 135.3 x 29.4 x 24.1 mm.  
Weight: 4.83 oz / 137 g (including battery).  
Product ID: WT25R.11111



# HEADLAMPS

HL / HM / HP / WH

**Fenix headlamps** have an unequalled fit and finish. Our headlamps provide essential lighting for hikers, runners, campers and hunters, and are reliable light sources for many industrial workers. Fenix applies its years of LED experience to the crafting of ultra-bright headlamps that are comfortable to wear and easy to use in a variety of conditions. Whether your adventures or works need ultra-light all-day comfort or high-performance lighting for an extended expedition, the Fenix Headlamp series has a lamp for the occasion. Grab a Fenix headlamp for hands-free illumination.



# HL SERIES



NEW



HL12R V2.0



HL16

NEW



HL18R-T V2.0



HL32R-T



HL40R

NEW



HL45R



# HL12R V2.0

Outdoor Ultralight Rechargeable Headlamp


- ✦ White and red light sources.
- ✦ Dual top switch for fast and easy operation.
- ✦ USB Type-C charging port ; battery level indication ; low-voltage warning.
- ✦ Electronic lockout function avoids accidental activation.
- ✦ High-quality aluminum alloy front case offers great durability and thermal performance.



# HL16

Lightweight Outdoor Headlamp


- ✦ White and red light sources for a variety of lighting demands.
- ✦ Dual switch for easy and fast operation.
- ✦ Replaceable battery design.
- ✦ 60° adjustable angle.

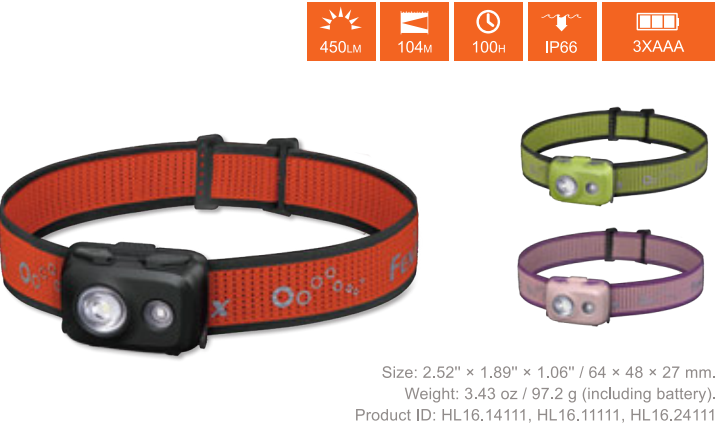

# HL18R-T V2.0

Ultralight Trail Running Headlamp

- ✦ Max 800 lumens output and 140 meters beam distance.
- ✦ Cold white light, warm white light and red light.
- ✦ Slide lock switch design avoids accidental activation.
- ✦ USB Type-C charging port; battery level indication; low-voltage warning.
- ✦ Single-handed operation with the new SPORT Headband Fit System.
- ✦ Emergency whistle.

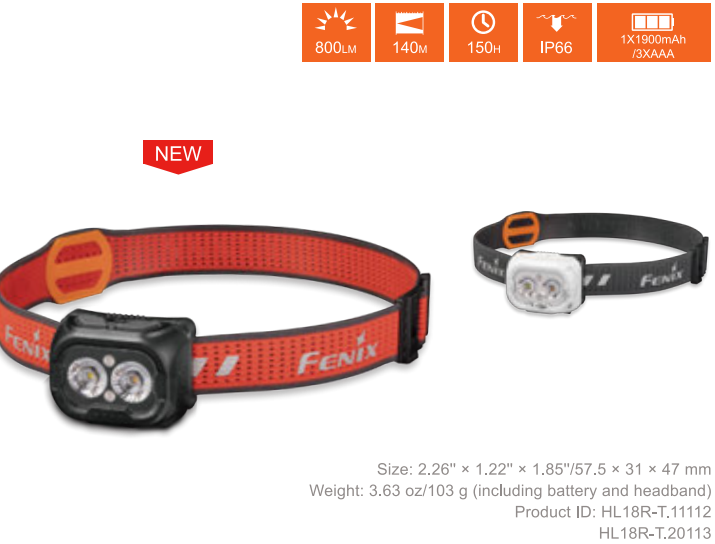

# HL32R-T

High-performance Trail Running Headlamp

- ✦ Quality magnesium alloy material, lightweight and durable.
- ✦ Frequency sensing: the brightness changes along with the speed.
- ✦ Separately controlled spotlight and floodlight.
- ✦ Single-handed operation with the new SPORT Headband Fit System.



# HL40R

All-round Rotary Focusing Headlamp

- ✦ Max 600 lumens output.
- ✦ One-handed rotary focusing of spotlight and floodlight.
- ✦ Overlapping headband, large bearing area.
- ✦ Micro USB charging.
- ✦ Battery level indication and lockout function.



# HL45R

Multipurpose Focusable Induction Headlamp

- ✦ Rotary switch and electronic switch combination for lockout function, mode switching, and output selection.
- ✦ Rotatable focusing ring for switching between spotlight and floodlight.
- ✦ Gesture-sensing function - the headlamp can be turned on or off with a wave of the hand.
- ✦ USB Type-C charging.
- ✦ Powered by a 1900mAh battery and compatible with three AAA batteries.





# HM SERIES



## HM23 V2.0

Multipurpose Ultralight Headlamp

- ✦ White and red light sources for a variety of lighting demands.
- ✦ Magnetic tail cap for hands-free use.
- ✦ Can be used as a flashlight.
- ✦ Large side switch for fast and convenient operation.



NEW



Size: 2.90" × 1.42" × 1.18"/73.6 × 36 × 30 mm.  
Weight: 3.04 oz/86.3 g (including battery and headband)  
Product ID: HM23.11114

## HM50R V2.0

High-performance Dual-purpose Headlamp

- ✦ Detachable structure for various wearing ways.
- ✦ Max 700 lumens output for various kinds of outdoor lighting needs.
- ✦ White and red light sources for different applications.
- ✦ USB Type-C charging for convenient use.
- ✦ Cold-resistant ability.



HOT



Size: 2.52" × 1.42" × 1.26" / 64 × 36 × 32 mm.  
Weight: 2.75 oz / 78 g (including battery and headband).  
Product ID: HM50R.11113

## HM60R

Intelligent Frequency-sensing Outdoor Headlamp

- ✦ Max 1300 lumens output and 120 meters beam distance.
- ✦ Spotlight, floodlight and red light combined.
- ✦ Frequency sensing: the brightness changes along with the speed.
- ✦ Hidden inner waterproof USB Type-C charging interface.
- ✦ Made of quality PC and aluminum, lightweight and wear-resistant.



Size: 3.35" × 1.77" × 1.77" / 85 × 45 × 45 mm.  
Weight: 5.54 oz / 157 g (including battery and headband).  
Product ID: HM60R.11111

NEW



HM23 V2.0

HOT



HM50R V2.0



HM60R



HM61R V2.0



HM62-T

HOT



HM65R

HOT



HM65R-T V2.0

HOT



HM70R

HOT



HM71R



HM75R



# HM61R V2.0

Dual Lighting Sources Multifunctional Headlamp

- ✦ Max 1600 lumens output and 300 hours runtime.
- ✦ Can be used as a flashlight.
- ✦ White and red light sources for a variety of lighting demands.
- ✦ Magnetic charging; battery level indication; charging indication.
- ✦ Magnetic tail, right-angled lighting.



Size: 3.98" × 1.77" × 1.42" / 101 × 45 × 36 mm.  
Weight: 5.36 oz / 152 g (including battery and headband).  
Product ID: HM61R.11114

# HM62-T

Lightweight Trail Running Magnesium Headlamp

- ✦ White and red light sources for different applications.
- ✦ Lightweight magnesium material.
- ✦ Single-handed operation with the new two-way SPORT Headband Fit System.
- ✦ Emergency whistle.
- ✦ Lockout function avoids accidental activation.



Size: 3.22" × 1.19" × 1.02"/81.8 × 30.2 × 26 mm  
Weight: 4.41 oz / 125g (including battery).  
Product ID: HM62-T.11111  
HM62-T.22111

Black Magma

# HM65R

Dual Lighting Sources Reliable Magnesium Headlamp

- ✦ Max 1400 lumens output.
- ✦ Separately controlled spotlight and floodlight.
- ✦ Dustproof, waterproof and impact-resistance.
- ✦ Quality aluminum, magnesium and PC material, lightweight and durable.
- ✦ USB Type-C fast charging.
- ✦ Electronic lockout function avoids accidental activation.



HOT



Size: 3.17" × 2.17" × 1.57" / 80.5 × 55 × 40 mm.  
Weight: 3.42 oz / 97 g (excluding battery).  
Product ID: HM65R.11112

# ONE CHARGING FOR 100KM RUNNING

As more and more running lovers participate in trail running races, the requirements for headlamps are becoming more and more stringent. The Fenix HM65 series is highly praised by trail runners due to its high performance and long runtime. The slogan "One charging for 100km running " is therefore widely spread.

In the meantime, Fenix has listened to the opinions of the users and then we have the upgraded version HM65R-T V2.0. On the basis of brightness improvement and battery life, the headlamp is more comfortable to wear with the top headband removed. Especially the new two-way SPORT Headband Fit System. It couldn't be more perfect to adjust the headband with a single hand while running.





# HM65R-T V2.0

Lightweight Magnesium Trail Running Headlamp

Black Nebula Dark purple



TWO-WAY SPORT HEADBAND FIT SYSTEM



Quality magnesium material, lightweight and durable. Cold white and warm white light sources; max 1600 lumens output.

Single-handed operation with the new SPORT Headband Fit System.

Emergency whistle.

USB Type-C charging port.

Utility Model Patent: ZL 202321621763.9

Size: 3.15" x 1.84" x 1.37"/80 x 46.8 x 34.9 mm

Weight: 4.94 oz/140 g (including battery and headband)

Product ID: HM65R-T.11114, HM65R-T.23115, HM65R-T.18116

White Light			Warm White Light				SOS
High	Med	Low	High	Med	Low	Eco	
1600 lumens	400 lumens	130 lumens	800 lumens	400 lumens	130 lumens	5 lumens	5 lumens
3 hours	12 hours	24 hours	6 hours	12 hours	24 hours	300 hours	600 hours



1600LM



170M



300H



IP68



1X3400mAh

# HM70R

Triple Light Source Rechargeable 21700-powered Headlamp



1600LM



186M



100H



IP68



1X21700/1X18650



Included a 5000mAh battery with a 100 hours runtime. Hidden USB Type-C charging port for convenient charging.

Large thumb-sized switch for easy and fast operation. White, neutral white and red light sources for different applications.

Size: 3.72" x 2.01" x 1.81"/94.5 x 51 x 46 mm.

Weight: 7.27 oz/206 g (including battery).

Product ID: HM70R.11111

General Mode				Functional Mode			
Turbo	High	Med	Low	Red	Med	High	SOS
1600 lumens	500 lumens	150 lumens	30 lumens	5 lumens	70 lumens	400 lumens	5 lumens
4 hours	6 hours	30 hours	100 hours	400 hours	48 hours	8 hours	800 hours



# HM71R

High-performance Rechargeable Industrial Headlamp

- ✦ Max 2700 lumens output.
- ✦ Spotlight and floodlight combined.
- ✦ Max 400 hours runtime.
- ✦ Multiple wearing ways for different applications.



# HM75R

Magnesium Separation Style Industrial Headlamp

- ✦ Made of high-quality magnesium alloy material.
- ✦ Rotary switch and electronic switch control the spotlight, floodlight, and red light.
- ✦ Included detachable 5000mAh power extender vastly extends runtime, and its USB Type-C port supports 18 W fast charging and discharging.
- ✦ Two lockable ends of the included charging cable prevent loose cable situations.
- ✦ USB Type-C ports with inner waterproofing treatment.



# HP SERIES



NEW



HP12R-T



HP16R



HP25R V2.0

HOT



HP30R V2.0

HOT



HP35R



HP35R SAR



# HP12R-T

Separation Style Trail Running Headlamp

- ✦ Separation style design balanced overall weight for more stable and comfortable wearing experiences.
- ✦ Spotlight, spot-and-floodlight, and red light.
- ✦ Separately controlled dual switch.
- ✦ Battery case features red light and red flash for enhanced user safety.
- ✦ Washable and detachable headband.
- ✦ Emergency whistle.



# HP16R

High-performance Rechargeable Outdoor Headlamp

- ✦ Max 1250 lumens output.
- ✦ Two power sources for free choice.
- ✦ USB Type-C charging port fast charging.
- ✦ Separately controlled dual switch; lockout function avoids accidental activation.
- ✦ Made of quality plastics and aluminum, integrated die-casting for better heat dissipation and safety performance.
- ✦ White, neutral white and red lights combined.



# HP25R V2.0

Rechargeable Work Headlamp With Ultra-long Runtime


- ✦ Max 1600 lumens output.
- ✦ Spotlight, floodlight, and red light combined.
- ✦ High-reliability aluminum offers excellent heat dissipation.
- ✦ USB Type-C charging.
- ✦ Powered by a 21700 battery and compatible with a 18650 battery.
- ✦ Lockout function avoids accidental activation.



# HP30R V2.0

Ultrahigh-performance Separate Search&Rescue Headlamp

- ✦ Max 3000 lumens output.
- ✦ Twisty switch for easy and fast operation.
- ✦ A waist-worn battery case can be placed in pocket and pack.
- ✦ USB Type-C charging port fast charging.
- ✦ Power bank function.

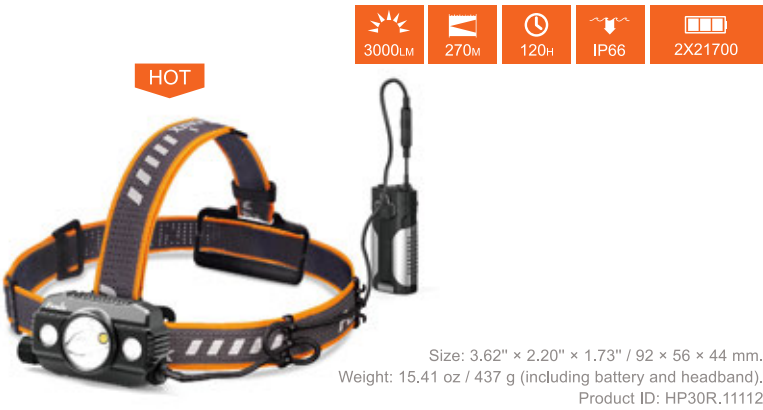

# HP35R/HP35R SAR

Multiple Light Sources High-output Search&Rescue Headlamp

- ✦ Quick-release large-capacity battery case ensures ultra-long runtime.
- ✦ Battery case features a red light source for warning and it can be used as a power bank.
- ✦ Rotary switch and electronic switch for easy and fast operation.
- ✦ The HP35R SAR headlamp is designed with a flame retardant and fire resistant rubber headband. Its innovative mount is compatible with multiple types of specialized helmets.
- ✦ The HP35R headlamp features a black, washable nylon headband that is lightweight, ventilated, and comfortable to wear.





# WH SERIES



## WH23R

Smart Induction Headlamp



- ✦ Max 600 lumens output and 100 meters beam distance.
- ✦ Spotlight, floodlight and combined output.
- ✦ Rotary switch for precise operation even with gloves.
- ✦ Gesture sensing for on/off.
- ✦ The center-rotating headlamp holder balances and improves the comfort of wearing.



Size: 3.40" × 1.77" × 1.72" / 86.45 × 45 × 43.72 mm.  
Weight: 4.06 oz / 115 g (including battery).  
Product ID: WH23R.19111

## WH30RE

Zone 1 Explosion-proof Headlamp



- ✦ Can be safely used in Zone 1 and can be used in combustible dust area: Zone 21.
- ✦ 280 lumens max output of floodlight for close-up illumination.
- ✦ Can be detached and used as a right-angled flashlight for multiple carrying options.



Size: 4.41" × 1.79" × 1.77"/112 × 45.5 × 45 mm.  
Weight: 5.40 oz/153 g (including battery).  
Product ID: WH30RE.11111, WH30RE.11112, WH30RE.11113, WH30RE.11114, WH30RE.11115



# GL SERIES



# TACTICAL LIGHTS

Fenix's newly developed professional tactical light series. Using advanced technology to create a compact high-performance tactical light suitable for full-size guns. It has super-strong white light and long-range beam, which is capable of fast and accurate aiming in low-light environments. It is suitable for all kinds of law enforcement, personal defense, competitive shooting, hunting, etc.



## GL06 / GL06-365

Compact Accessory Light

- ★ GL06 is specifically designed for guns with both Glock universal rail and Picatinny rail.
- ★ GL06-365 is specifically designed for guns with SIG-Sauer P365 rail, P365 XL rail or other rails (SIG-Sauer P365 rail, P365X rail, P365-380 rail, P365XL rail, P365 SAS rail, and other types of rail with the same size).
- ★ QD lever for quick install and quick detach.
- ★ Instant strobe.
- ★ Dual tail switch for fast, single-handed operation.



Size: 2.40" x 1.11" x 0.93" / 61 x 28.15 x 23.5 mm.  
Weight: GL06: 2.43 oz/69.1 g(including battery).  
GL06-365: 2.45 oz/69.4 g(including battery).  
Product ID: GL06.11111, GL06.11112



GL06/GL06-365



GL19R V2.0



GL22



GL23R

## GL22

Dual Output Accessory Light

- ★ Max 750 lumens output and 180 meters beam distance.
- ★ Precise red laser sight.  
\*Laser parameters: CLASS 3R laser product, laser wavelength 640-660nm, laser optical power output <5mW.
- ★ Design for guns with tactical rails.
- ★ Two-handed operation with dual tactical tail switch.
- ★ Instant strobe.



Size: 2.64" x 1.65" x 1.22" / 67 x 42 x 31 mm.  
Weight: 3.32 oz / 94 g (including battery).  
Product ID: GL22.11111



# GL19R V2.0

High-intensity Rechargeable Tactical Light



1200LM



420M



55Min



IP66



1X18350



Glock rail plate  
for Glock universal rails



1913 rail plate  
for Picatinny rails

- Ambidextrous mechanical rear switches for instant activation.
- Digitally regulated circuit for maintaining a stable output.
- Reverse polarity protection, to protect from improper battery insertion.
- Toughened ultra-clear glass lens with an anti-reflective coating.

Size: 3.70" x 1.22" x 1.25"/94 x 31 x 32 mm Weight: 4.20 oz/119 g (including battery).  
Product ID: GL19R.11112

White Light
1200 lumens
55 minutes

# GL23R

Green Laser Tactical Light



1200LM



240M



13H



IP66



1X18350



- Precise green laser sight.
- Tail switches can be replaced based on the user's preferences.
- USB Type-C charging port.
- Ambidextrous mechanical tail switches for instant activation.

Size: 3.43" x 1.18" x 1.69"/87 x 30 x 43 mm. Weight: 4.23 oz/120 g (including battery).  
Product ID: GL23R.11111 GL23R.11112

White Light	White Ligh + Green Laser	Green Laser
1200 lumens	1200 lumens + 520nm green laser ≤ 5mW	520nm green laser ≤ 5mW
1 hour	1 hour	13 hours




# BC SERIES



# BC SERIES

With a **Fenix bicycle light**, you can expect the best and the brightest, with practical features, no matter where your bike takes you. From deserted night-time trails to urban environments, a Fenix bicycle light helps you see and be seen in the park so you remain safe on your cycling adventure. No matter where your cycling takes you, you can depend on a Fenix bike light to illuminate your way.

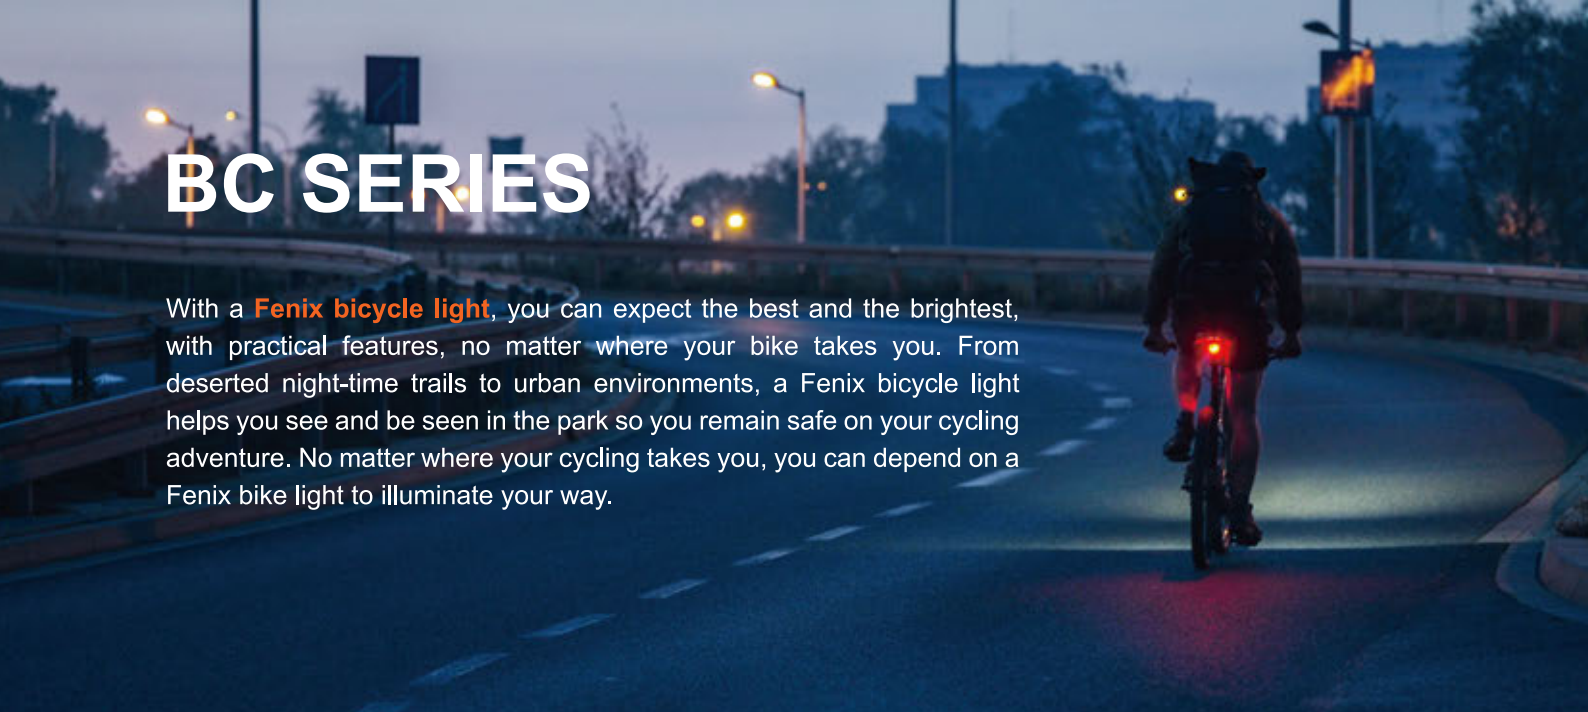

## BC05R V2.0

Ultra-compact Rechargeable Bicycle Taillight

 15LM	 50M	 120H	 IP66	 400mAh
--	---	--	--	--

- ✦ Max 15 lumens output and 50 meters alerting distance.
- ✦ Battery level indication.
- ✦ USB Type-C charging.
- ✦ Matched with the body clip, can be used as a backpack light, or chest light.
- ✦ Single switch for easy and fast control.



Size: 2.01" x 0.87" x 0.87" / 51 x 22 x 22 mm.  
Weight: 0.99 oz / 28 g (including battery).  
Product ID: BC05R.11113

## BC06R

Smart Brake Sensing Bicycle Taillight

 90LM	 100M	 24.5H	 IP66	 560mAh
--	--	---	--	--

- ✦ Smart brake sensing function.
- ✦ The output of Braking is 90 lumens and the alerting distance is 100 meters.
- ✦ Can be mounted on saddle rails or seatposts.
- ✦ Quick-release structure for fast assembly and disassembly.
- ✦ USB Type-C charging.



Saddle rail mount



Seatpost mount

Size: 1.50" x 1.50" x 1.50"/38 x 38 x 38 mm  
Weight: 1.57 oz/44.5 g(including battery)  
Product ID: BC06R.11111



BC05R V2.0



NEW  
BC06R



BC15R



NEW  
BC22R



BC25R



HOT  
BC26R



HOT  
BC30 V2.0



# BC22R

High-performance Road Bicycle Light



Handlebar mount



Adapter mount



1400LM



156M



41H



IP66



1X3400mAh



Max 1400 lumens output and 156 meters beam distance. Supports both normal and inverse installations. Anti-glare cut-off facula line. Included is a replaceable battery ; USB Type-C charging. Marine bionic design combined with aerodynamics, which effectively minimizes wind resistance.

Size: 4.53" x 1.34" x 1.14"/115 x 34 x 29 mm  
Weight: 5.54 oz/157 g (including battery)  
Product ID: BC22R.11111

Turbo	High	Med	Low	Flash
1400 lumens	600 lumens	200 lumens	50 lumens	200/50 lumens
2 hours 20 minutes	5 hours 30 minutes	11 hours	41 hours	/



# BC15R

Lightweight Cut-off Facula Line Bicycle Light



400LM



78M



31.5H



IP66



1X2600mAh

- ✦ Max 400 lumens output and 78 meters beam distance.
- ✦ USB Type-C charging.
- ✦ One switch control.
- ✦ Anti-glare cut-off facula line.
- ✦ Quick-release bike mount, easily operated.



Size: 4.02" x 1.24" x 1.22"/102 x 31.5 x 31 mm.  
Weight: 3.84 oz/109 g (including battery).  
Product ID: BC15R.11111

# BC25R

Lightweight Cut-off Facula Line Bicycle Light



600LM



106M



36H



IP66



1X2600mAh

- ✦ Max 600 lumens output.
- ✦ Anti-glare cut-off facula line.
- ✦ Micro USB rechargeable.
- ✦ One switch control.
- ✦ Quick-release bike mount, easily operated.



Utility Model Patent: ZL 201720600803.X  
Size: 4.45" x 1.26" x 1.22" / 113 x 32 x 31 mm  
Weight: 5.47 oz / 155 g (including mount and battery)  
Product ID: BC25R.11111





# CL SERIES

## BC26R

Ultra Bright Rechargeable Mountain Bicycle Light

- ✦ Max 1600 lumens output and 169 meters beam distance.
- ✦ USB Type-C charging.
- ✦ Quick-release design, two-step assembly and disassembly.
- ✦ Easy and fast operation with a single switch.
- ✦ Flash mode warns backside approaching drivers and passengers.
- ✦ Can be installed on the stopwatch holder with ALD-10.
- ✦ Can be used as a helmet light with the Fenix ALD-08 bicycle light helmet holder.



HOT



- 1600LM
- 169M
- 65H
- IP68
- 1x5000mAh

Size: 4.45" x 1.14" x 1.06" / 113 x 29 x 27 mm.  
Weight: 5.47 oz / 155 g (including battery).  
Product ID: BC26R.11111

## BC30 V2.0

Wireless Control Metal Bicycle Light

- ✦ Max 2200 lumens output.
- ✦ Smart wireless control switch.
- ✦ All-metal housing.
- ✦ Quick-release bicycle mount, easy to assemble and disassemble.
- ✦ Dual Distance Beam System.
- ✦ Smart wireless control switch.

HOT



Wireless switch

- 2200LM
- 187M
- 50H
- IP67
- 2X18650 / 4XCR123A

Size: 4.72" x 1.99" x 1.25" / 120 x 50.5 x 31.8 mm.  
Weight: 5.43 oz / 154 g (excluding battery).  
Product ID: BC30.11112



CL20R



CL22R



CL26R Pro



CL27R



CL28R



CL30R

HOT

HOT

HOT



# ENJOY CAMPING

Whether it is for hiking, camping or outdoor dining, **Fenix camping lanterns** will supply your bright light. Fenix lanterns are built to withstand the harsh conditions of outdoor use. Their versatile power sources, brilliant neutral white glow, and easy-to-use interface make them perfect for the most rugged campers on the planet. Fenix lanterns can last you longer due to their extreme durability.



## CL20R

Micro USB Rechargeable Camping Lantern

- ✦ Max 300 lumens and 200 hours runtime.
- ✦ White and red light sources.
- ✦ Magnetic bottom and hanging loop.
- ✦ Micro USB rechargeable.
- ✦ Made of quality plastics and high transparent material - smooth anti-glaring beam.




Size: 2.83" x 1.97" x 1.63" / 72 x 50 x 41.5 mm.  
Weight: 3.21 oz / 91 g (including battery).  
Product ID: CL20R.15111

## CL22R

Compact Multifunctional Atmosphere Lantern

- ✦ Max 500 lumens output and 200 hours runtime.
- ✦ Rotary switch and electronic switch combination for fast and convenient operation.
- ✦ 360°lighting mode, down light mode, and combined lighting mode meet the lighting needs from various directions.
- ✦ Sturdy built-in hook.
- ✦ Colorful atmosphere lights.
- ✦ Classic Rome column appearance design.



HOT



Size: 1.50"x1.65"x4.53" / 38 x42 x115 mm  
Weight: 4.76 oz / 135 g (including battery)  
Product ID:  
CL22R.20112  
CL22R.11113  
CL22R.14111

## CL26R Pro

Multifunctional Portable Camping Lantern

- ✦ Rotary toggle switch and electronic switch.
- ✦ Top magnetic absorption.
- ✦ White and red light sources.
- ✦ Multiple lighting combinations.
- ✦ USB Type-C charging port.
- ✦ USB-A discharging port.



Size: 2.60" x 2.34" x 4.49" / 66 x 59.5 x 114 mm.  
Weight: 7.02 oz / 199 g (excluding battery).  
Product ID: CL26R.14112, CL26R.20112, CL26R.22112

## CL28R

Multifunctional Outdoor Lantern

- ✦ Dual rotary switches allow free adjustment of the brightness and color temperature.
- ✦ 360° rotary handle makes all-around lighting possible.
- ✦ USB Type-C charging port and USB-A discharging port.
- ✦ The lantern handle can be attached to magnetic metal surfaces.
- ✦ White and red light sources.



HOT



Design Patent: ZL 202130698237.2  
Utility Model Patent: ZL 2021232781024  
Size: 3.94" x 3.82" x 1.61"/100 x 97 x 41 mm.  
Weight: 13.26 oz/376 g (including battery).  
Product ID: CL28R.12111

## CL30R

Charge And Discharge Camping Lantern

- ✦ Max 650 lumens output, 35 meters beam diameter.
- ✦ Independent circuit design.
- ✦ Micro USB charging and discharging function.
- ✦ Built-in hanging loop and tripod socket interface.
- ✦ Can be floated on the water.



Size: 5.35" x 3.66" x 3.66" / 136 x 93 x 93 mm.  
Weight: 14.5 oz / 412 g (excluding battery).  
Product ID: CL30R.11111



CL27R

Spot-and-floodlight Multifunctional Outdoor Lantern

Wildt green Glacier blue

1600LM

180M

285H

IP66

1X5000mAh



Spotlight for long-range illumination and floodlight for close-up lighting.

Dual rotary switches allow free adjustment of the brightness and color temperature.

360° rotary handle and threaded tripod socket for multiple mounting ways.

Size: 4.32" × 1.56" × 3.61"/109.8 × 39.6 × 91.7 mm  
Weight: 10.58 oz/300 g (including battery)  
Product ID: CL27R.14111, CL27R.13112

Floodlight Mode			Spotlight Mode			Spot-and-floodlight Mode		Red light Mode	
High	Med	Low	High	Med	Low	High	Low	Constant-on	Flashing
1200 lumens	600 lumens	10 lumens	800 lumens	400 lumens	5 lumens	1600 lumens	15 lumens	10 lumens	10 lumens
4 hours 18 minutes	5 hours 30 minutes	170 hours	8 hours	10 hours 15 minutes	285 hours	3 hours 50 minutes	100 hours	72 hours	144 hours

ACCESSORIES

Fenix has been striving and succeeding in developing creative and practical accessories to enhance and dramatically improve the performance of our lighting products. Currently, Fenix offers users accessories including diffuser tips, filter adapters, traffic wands, remote switches, etc. to satisfy consumers' requirements.



BATTERIES



Rechargeable Batteries

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short-circuiting caused by collision or impact.

- Triple overheat design, safe and reliable.
- Built-in overcharge and overdischarge protection circuit to ensure battery life.
- The circuit board is fully protected, with high reliability and impact resistance.

Model	Type	Capacity	Voltage	Model	Type	Capacity	Voltage
ARB-L14-1050	14500	1050 mAh	3.6V	ARB-L18-3400	18650	3400 mAh	3.6V
ARB-L14-1600U	14500+Micro	1600 mAh	1.5V	ARB-L18-3400U	18650+Micro	3400 mAh	3.6V
ARB-L14-2200U	14500+Type-C	2200 mAh	1.5V	ARB-L18-3400U V2.0	18650+Type-C	3400 mAh	3.6V
ARB-L16-700UP	16340+Micro	700 mAh	3.6V	ARB-L18-3400U V3.0	18650+Type-C	3400 mAh	3.6V
ARB-L16-800P	16340	800mAh	3.6V	ARB-L18-3500	18650	3500 mAh	3.6V
ARB-L16-800UP	16340+Type-C	800 mAh	3.6V	ARB-L18-3500U	18650+Micro	3500 mAh	3.6V
ARB-L16-950P	16340	950mAh	3.6V	ARB-L18-4000	18650	4000 mAh	3.6V
ARB-L18-1100	18350	1100 mAh	3.6V	ARB-L18-4000U	18650+Type-C	4000 mAh	3.6V
ARB-L18-1100P	18350	1100 mAh	3.6V	ARB-L21-4000P	21700	4000 mAh	3.6V
ARB-L18-1600	18350	1600mAh	3.6V	ARB-L21-5000U	21700+Type-C	5000 mAh	3.6V
ARB-L18-2600	18650	2600 mAh	3.6V	ARB-L21-5000 V2.0	21700	5000 mAh	3.6V
ARB-L18-2600U	18650+Micro	2600 mAh	3.6V	ARB-L21-6000	21700	6000 mAh	3.6V
ARB-L18-3000P	18650	3000 mAh	3.6V	ARB-L21-6000B	21700+TYPE-C	6000 mAh	3.6V



ALF-18 Battery Holder

The Fenix 18650 Li-ion battery can be used as a 21700 Li-ion battery when combined with this battery holder.

- PC + ABS materials - reliable and durable.
- Copper-plated positive contact - excellent performance in conductivity.
- Size: 2.41" x 0.85"/61.2 x 21.5 mm.
- Weight: 0.22 oz/6.1 g.





ARE-A2 Dual Channel Charger

The Fenix ARE-A2 is a dual-channel charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-A4 Multifunctional Charger

The Fenix ARE-A4 is a four-channel smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- Rated output power: 6W (Ni-MH/Ni-Cd), 16.8W (Li-ion).
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Built-in short circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-D1 Single Channel Multifunctional Charger

The Fenix ARE-D1 is a single channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W(Li-ion).
- Short circuit protection, over-current protection, over-voltage protection, and reverse-polarity protection.



ARE-D2 Dual Channel Multifunctional Charger

The Fenix ARE-D2 is a dual channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.



ARE-X1 V2.0 Single Channel Smart Charger

The Fenix ARE-X1 V2.0 is a single channel smart charger that features USB Type-C charging and USB discharging function, designed for 18650, 21700 and 26650 batteries, and provides charging, discharging, and battery power detection.

- Compatible with one 18650, one 21700 or one 26650 rechargeable Li-ion battery.
- Supports USB Type-C charging and USB discharging.
- LED charging/discharging indicator; LED battery power detection.
- Short circuit, over-current, over-voltage and reverse polarity protection.
- Microcomputer chip controlled, digitally regulated charging to extend battery life.

DIFFUSER TIP/FILTER ADAPTER/TRAFFIC WAND



AOD-S V2.0/AOD-M Diffuser Tip

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Imported novel optical material guarantees quality.
- Durable, impact-resistant, and fireproof to V2 Standard.
- Easy operation.



AOD-04 Diffuser Tip

This AOD-04 diffuser tip can soften the light and work as a camping light and signal light,etc.

- Compatible Fenix light head: 40 mm.
- Soft silicone material, flexible, comfortable and easy to carry.
- Easy and firm assembly.
- Capable of tail standing.



AOF-S+V2.0/AOF-L Filter Adapter

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with an anti-reflective coating that provides heat resistance and maximum light penetrability.
- Germany's Bayer PC 2805 material, aging and impact resistant.
- Anti-roll design, easy to assemble and disassemble.



AOT-S+/AOT-M/AOT-01 Traffic Wand

Fenix traffic wand can convert your flashlight into a glowing red high-visibility wand. It' s the best option for emergency situations and traffic control.

- German Bayer PC 2805 material.
- High compressive strength, impact resistance.
- High-temperature resistance and benign thermal stability.
- Easy to assemble and disassemble.



AOT-03/AOT-04 Traffic Wand

Fenix traffic wand can convert your flashlight into a glowing high-visibility wand. With red and white two color options, this traffic wand is an ideal option for flashlight lighting and traffic control.

- High-quality soft silicone material, reliable and flexible.
- Included lanyard hole for easy carry.
- Open bottom design for realizing flashlight illumination and traffic control.
- Compatible with a wide range of flashlight of various sizes.



TACTICAL ACCESSORIES

AER-02 V2.0 Remote Pressure Switch

The Fenix AER-02 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30 mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 25.4 mm Diameter x 31.5 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with a single tail switch.

AER-03 V2.0 Remote Pressure Switch

The Fenix AER-03 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination and output selection (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30 mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 26.5 mm Diameter x 32 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with dual tail switch.

AER-04 Remote Pressure Switch

The new Fenix AER-04 remote pressure switch is specialized in tactical flashlights using 21700 battery. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a full-silent forward switch and a tape switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14"/29 mm.
- Applicable thread: Tr25.5 x 0.06"/1.5 mm.
- Cable length: 9.06"/230 mm.
- Full length: 13.39"/340 mm.
- Weight: 1.48 oz/42 g.

AER-05 Remote Pressure Switch

The Fenix AER-05 remote pressure switch is specialized in tactical flashlights with APF circuits. The dual tail switch panel includes a silent pressure pad switch and a round tactical switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14"/29 mm.
- Applicable thread: Tr25.5 x 0.06"/1.5 mm.
- Cable length: 9.06"/230 mm.
- Full length: 13.39"/340 mm.
- Weight: 1.48 oz/42 g.

ALG-00 Rail Mount

The Fenix ALG-00 features the quick detachable Picatinny rail design which suits tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5 to 26 mm, and a wrench is needed when clipping flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all-black treatment without light reflection.

ALG-05 Remote Pressure Switch Mount

The Fenix ALG-05 remote pressure switch mount is specially designed for Fenix AER series tactical remote pressure switches. It perfectly fits the Picatinny rail by a simple push; featuring convenient assembly and disassembly, the mounting position can be flexibly adjusted. Designed specifically for tactical lighting, the remote pressure switch is within easy reach, so the flashlight can be momentarily switched on with a press of the button. The whole body of the mount is made of aluminum alloy with hard-anodized finish, and it is not reflective in matte black, which meets the needs of tactical concealment.

ALG-06 Remote Pressure Switch Mount

The Fenix ALG-06 tactical remote pressure switch mount can adapt the AER-02 V2.0/03 V2.0/04/05 remote pressure switch to the M-LOK rail, which is lightweight, and reliable.

- Lock fixation ensures no displacement.
- All-metal housing.
- Size: 2.72" x 0.93" x 0.40"/69 x 23.7 x 10.2 mm.
- Weight: 0.87 oz/24.7 g.

ALG-15 Rail Mount

The Fenix ALG-15 rail mount can fit a flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the Picatinny rail (MIL-STD-1913), making quick disassembly and assembly possible by means of a screw nut.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.95" x 1.22" x 1.18" / 75 x 31 x 30 mm.
- Weight: 1.36 oz / 38.6 g.

ALG-16 M-LOK Quick-release Rail Mount

The Fenix ALG-16 M-LOK quick-release rail mount can fit the flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the M-LOK rail, making quick disassembly and assembly possible by hand.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.04" x 1.66" x 1.19"/51.7 x 42.1 x 30.1 mm.
- Weight: 1.88 oz/53.3 g.

ALG-18 Rail Mount

The Fenix ALG-18 rail mount is a functional accessory that helps to perform tactical/hunting applications; which suits weapon barrels ranging from 18 - 23 mm. The compatible flashlight body diameter ranges from 23.5 - 28 mm with a light head diameter of less than 70 mm. Made of durable and high-strength aluminum, the easy operation effectively assists in tactical/hunting scenarios.

- Allows for quick assembly and disassembly of the gun barrels.
- Tool-free assembly and disassembly.
- Fits a variety of barrel dimensions.
- Size: 2.99" x 1.81" x 1.37"/76 x 46 x 35 mm
- Weight: 3.10 oz/88 g






### ALP-10S/10L Flashlight Holster

The Fenix ALP-10S/10L is a holster that is specifically designed for packing and protecting flashlights. The use of anti-tear nylon material features excellent abrasion resistance. Three layers of different materials are used, with one-time hot pressing, which is stylish and durable; the back webbing is designed with a combination of Velcro and nickel-plated metal button, ensuring strong stability and quick-release ability. The holster can be perfectly matched with the belt, backpack, and more. In this way, the flashlight is fully protected in a variety of scenarios such as law enforcement, outdoor lighting, searching and rescuing, etc.


- The use of anti-tear nylon material features excellent abrasion resistance.
- Strong stability and quick-release ability.
- Stylish and durable.



### T6 Automatic Retracting Tactical Pen

The Fenix T6 is a multifunctional self-defense tactical pen that is capable of illuminating, window-breaking and writing. Its maximum brightness reaches 80 lumens, and it supports Type-C charging. This tough pen features a zirconium bead that can break glass and assist in escape from danger. Inside every pen is an imported Schmidt pen cartridge for smooth, effortless writing. As you can expect, this rugged, high-performance writing tool is tough enough to provide you with a tactical advantage in emergency situations.

- Removable Schmidt 6.8CM metal pen refill for self-defense.
- Automatic retracting ink tip for smooth writing.
- Made of A6061-T6 aluminum.
- Premium type HAIII hard-anodized anti-abrasive finish.



### ALR-01 Tactical Flashlight Ring

The Fenix ALR-01 tactical flashlight ring is designed for the multiple series of Fenix tactical flashlights that feature a body clip. The ring is easy to disassemble and assemble. It is made of high-strength nylon. The lightweight design and great portability provide users with a convenient and flexible flashlight operating experience to meet various holding needs.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK20R UE/TK22 TAC/TK30
- PD series: PD36R PRO/PD36 TAC
- HT series: HT18/HT30R



### ALP-20 Open-top Leather Holster

The Fenix ALP-20 is a quick-pull leather case for duty flashlight. The whole is made of full-grain cowhide. The flashlight will not loosen after being inserted; it is a close-fitting concealed flashlight cover that is very suitable for casual clothes. Wear firmly, the flashlight will not shake even when running and under strenuous exercise. Body and thigh squeeze of the holster will not trigger the switch, and it is excellent to prevent accidental touch.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK22R/TK30, etc.
- PD series: PD36R V2.0/PD40R V3.0, etc.


## HEADBAND/FANNY PACK/STORAGE BAG



### AFB-10 Sports Fanny Pack


The Fenix AFB-10 is a waterproof sports fanny pack with a large storage capacity. It features an adjustable waist strap and cross-shaped headphone hole, making running more enjoyable. In addition, a reflective logo ensures safer night running.

- Folded and tensile design, the storage capacity of the pack can be extended.
- The inside is a TPU waterproof layer, plus a waterproof zipper, all of which makes the pack resistant to water and sweat.
- Hidden hole for headphone usage.
- High-elastic adjustable belt for a closed and personal fit.
- Reflective Fenix logo.
- 4 colors for options: black, gray, blue, orange.




### AFH-02/AFH-03 Sports Headband

- Made of elastic and air-permeable nylon.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- Hollow design - breathable and comfortable.



### AFH-05 Widened Perforated Quick-adjust Headband


- Made of elastic and durable nylon.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- 36 mm widened design - stable and reliable.
- Safe reflective logo and lines.
- Applicable headlamps: HL16, HL18R-T, HL32R-T, HM65R-T V2.0



### AFH-10 Sports Headband

The Fenix AFH-10 is a high-elastic quick-drying sports headband, made of air-permeable nylon fabric. The sweat-channeling silicone lines, reflective logo and lines make night activities safer.

- 70% nylon, 30% spandex - high-elastic and air-permeable.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- 4 colors for options: black, gray, blue, orange.



### APB-20/APB-30 Headlamp Storage Bag

- Made of high-strength nylon cloth - lightweight and wear-resistant properties.
- Increased and large storage space, inner mesh cloth bag - enough for headlamp and battery storage.
- 50mm long lanyard.
- High-strength zipper.
- Applicable headlamps: HL10, HL12R, HL15, HL16, HL18R, HL23, HL26R, HM61R, HM65R, etc.
- 1000 times cycle use; 1-year free repair, lifetime limited warranty.

## MOUNT/HOOK/LANYARD/EMERGENCY WHISTLE



### ALB-10 Quick-release Bicycle Mount

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release.
- Fits flashlights with a diameter of 18 mm - 26 mm.
- Rotating 30-degree design adjusts to any locking angle.
- A high-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar.
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain.





ALB-20 Multipurpose Snap Hook

- Quick-release, stable wearing.
- Bottle opener.
- Straight screwdriver.
- Non-magnetizable.
- Size: 2.12" x 1.13" x 0.14"/53.8 x 28.6 x 3.5 mm.
- Weight: 0.32 oz/9 g.
- Material: Titanium alloy TC4.



ALD-02 Helmet Attachment Hook Set

- Made of environmentally friendly PC material.
- Keep the headband firm on the helmet.
- Suitable for helmets of thickness less than 6 mm.
- Not for fully protective outdoor sports headlamps and headlamps with foam lining.



ALD-05 Flashlight Helmet Holder

- Anti-static rubber fixing strap, compatible with all types of helmets.
- Adjustable clamping caliber - suitable for flashlights with an outer body diameter of 20 - 28 mm.
- 360° adjustable angle.



ALD-08 Bicycle Light Helmet Holder

Applicable to all Fenix BC series products excluding Fenix BC21R, BT30R, BTR20 and BT20.

- The fitted cable ties are applicable to a variety of bicycle helmets.
- Push and pull for one-second assembly and disassembly.
- Nylon and fiberglass - high toughness, strength and durability.
- Weight: 0.39 oz/11 g.
- Size: 2.87" x 2.20" x 0.55"/73 x 56 x 14 mm.



ALD-10 Bicycle Light Holder with GoPro Interface

The holder is lightweight, and the bicycle light can be easily fixed with a single push. It is applicable to all Fenix bicycle lights.

- International GoPro interface.
- Easy assembly.
- Compact and lightweight.



ALG-03 V2.0 Headlamp Attachment

ALG-03 V2.0 headlamp attachment is specifically designed for headlamp fixation to outdoor or industrial work helmets. It enables fast and convenient attachment and detachment of headlamps to and from the helmet and allows adjustment of the lighting angle of the headlamps.

- Made of quality nylon - durable and eco-friendly.
- Included TESA adhesive tapes.



ALG-04 Helmet Clip

The Fenix ALG-04 headlamp clip is specifically designed for headlamp fixation to professional helmets with shroud. It enables easy and convenient attachment and detachment of the headlamp to and from the helmet with the slots design. Made of high-quality nylon material, it is durable and environmentally-friendly.

- Quick assembly.
- Applicable products: HL55, HL60R, HM60R, HM61R, HM65R, HM70R, HP30R V2.0.



ALL-01 Soft Flashlight Lanyard

ALL-01 is a flashlight lanyard made of nylon and silicone sleeves. The length of the nylon cord and the silicone sleeves can be adjusted as needed. This flashlight lanyard is very comfortable to the hands and features non-slip as well.

- Applicable products: SD11, SD20, TK47UE, TK47, TK72R, TK75, RC40.
- Size: 0.35" Tube diameter x 9.25" Length (9 x 235 mm).
- Weight: 0.42 oz/12 g.



ALW-01 Wrist Flashlight Holder

The Fenix ALW-01 wrist flashlight holder is a wearable helper that is designed to hold a small flashlight with a body clip on your arm or your wrist. Constructed from durable PC material, the 360 ° adjustable flashlight holder is flexible for perfect hands-free illumination. The wrist strap is made of durable Nylon yarn, which is wear-resistant and comfortable to wear, and the adjustable range of the wrist strap is 140 - 200 mm. This wrist flashlight holder can be freely worn on the left or right hand.

- Body size: 2.09" x 1.77" x 0.83"/53 x 45 x 21.2 mm(Length x Width x Thickness).
- Wrist strap size: 9.06 x 1.57"/230 (±5) x 40 (±1) mm (Length x Width).
- Adjustable range of the wrist strap: 140 - 200 mm.
- Body weight: 0.56 oz/16 g, wrist weight: 0.32 oz/9 g; 0.88 oz/25 g in total.



NW20 Emergency Whistle

Fenix turns a world of emergency preparedness experience with reliable lighting products into these high-output whistles. Whether injury, disaster or personal threats are present, the easy-blowing design takes 30% less effort to reach up to 120 decibels peak out. Pealess construction from food-grade stainless steel provides decades of confidence even in harsh outdoor environments.

- Size: 1.77" x 0.59" x 0.31"/45 x 15 x 7.9 mm
- Weight: 0.71 oz/20 g
- Material: 304/304L stainless steel



FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery					Battery Holder	Diffuser Tip				Filter Adapter	Traffic Wand				Rail Mount				Remote Switch	
	ARB					ALF	AOD				AOF	AOT				ALG				AER	
	L14 (14500)	L16 (16340)	L18 (18350)	L18 (18650)	L21 (21700)	18	S V2.0	M	04	S+V2.0	L	S+	M	03	04	00	15	16	18	02 V2.0	03 V2.0
Flashlight - E Series																					
E01 V2.0																					
E03R V2.0																					
E05R																					
E06R																					
E09R																					
E12 V3.0																					
E18R V2.0																					
E20 V2.0																					
E28R V2.0																					
E35R																					
E-CP																					
E-STAR																					
Flashlight - LD Series																					
LD02 V2.0																					
LD12R																					
LD22 V2.0																					
LD30R																					
LD35R																					
LD45R																					
Flashlight - PD Series																					
PD25R																					
PD32R																					
PD35 V3.0																					
PD35R																					
PD36R V2.0																					
PD36R Pro																					
PD36 TAC																					
PD40R V3.0																					
PD45R																					
Flashlight - TK Series																					
TK05R																					
TK11R																					
TK16 V2.0																					
TK17																					
TK20R V2.0																					
TK20R UE																					
TK21R																					
TK22 TAC																					
TK22R																					
TK25R																					
TK26R																					
TK30																					
TK30R																					
TK35R																					
TK35UE V2.0																					
Flashlight - HT Series																					
HT18																					
HT18R																					

Remote Switch			Flashlight Holster			Tactical Flashlight Ring	Headlamp Storage Bag		Headlamp Attachment		Headband				Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Helmet Holder	Bicycle Light Holder	Wrist Flashlight Holder	Lanyard	MODEL
AER			ALP			ALR	APB		ALG		AFH				ALB	ALD	ALD	ALD	ALW	ALL	
04	05	06s	10s	10L	20	01	20	30	03 V2.0	04	02	03	10	05	10	05	08	10	01	01	
Flashlight - E Series																					
																					E01 V2.0
																					E03R V2.0
																					E05R
																					E06R
																					E09R
																					E12 V3.0
																					E18R V2.0
																					E20 V2.0
																					E28R V2.0
																					E35R
																					E-CP
																					E-STAR
Flashlight - LD Series																					
																					LD02 V2.0
																					LD12R
																					LD22 V2.0
																					LD30R
																					LD35R
																					LD45R
Flashlight - PD Series																					
																					PD25R
																					PD32R
																					PD35 V3.0
																					PD35R
																					PD36R V2.0
																					PD36R Pro
																					PD36 TAC
																					PD40R V3.0
																					PD45R
Flashlight - TK Series																					
																					TK05R
																					TK11R
																					TK16 V2.0
																					TK17
																					TK20R V2.0
																					TK20R UE
																					TK21R
																					TK22 TAC
																					TK22R
																					TK25R
																					TK26R
																					TK30
																					TK30R
																					TK35R
																					TK35UE V2.0
Flashlight - HT Series																					
																					HT18
																					HT18R



FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery					Battery Holder	Diffuser Tip			Filter Adapter		Traffic Wand				Rail Mount				Remote Switch		
	ARB						ALF	AOD			AOF		AOT				ALG				AER	
	L14 (14500)	L16 (16340)	L18 (18350)	L18 (18650)	L21 (21700)			18	S V2.0	M	04	S+V2.0	L	S+	M	03	04	00	15	16	18	02 V2.0
HT30R																						
HT32																						
Flashlight - LR Series																						
LR35R																						
LR35R PRO																						
LR36R																						
LR40R V2.0																						
LR50R																						
LR60R																						
LR80R																						
Flashlight - WF Series																						
WF05E																						
WF11E																						
WF25RM																						
WF26R																						
WF30RE																						
Flashlight - WT Series																						
WT16R																						
WT25R																						
Flashlight - S Series																						
SW05R-UV																						
SW05R-RED																						
Tactical Light - GL Series																						
GL06/GL06-365																						
GL19R																						
GL22																						
GL23R																						
GL19R V2.0																						
Headlamp - HL Series																						
HL12R V2.0																						
HL16																						
HL18R-T																						
HL18R-T V2.0																						
HL32R-T																						
HL40R																						
HL45R																						
Headlamp - HM Series																						
HM23 V2.0																						
HM50R V2.0																						
HM60R																						
HM61R V2.0																						
HM62-T																						
HM65R																						
HM65R-T V2.0																						
HM70R																						
HM71R																						
HM75R																						
Headlamp - HP Series																						
HP12R-T																						

Remote Switch			Flashlight Holster			Tactical Flashlight Ring	Headlamp Storage Bag	Headlamp Attachment	Headband					Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Helmet Holder	Bicycle Light Holder	Wrist Flashlight Holder	Lanyard	MODEL
AER			ALP			ALR	APB	ALG	AFH					ALB	ALD	ALD	ALD	ALW	ALL	
04	05	06s	10s	10L	20	01	20	30	03 V2.0	04	02	03	10	05	10	05	08	10	01	01
																				HT30R
																				HT32
Flashlight - LR Series																				
																				LR35R
																				LR35R PRO
																				LR36R
																				LR40R V2.0
																				LR50R
																				LR60R
																				LR80R
Flashlight - WF Series																				
																				WF05E
																				WF11E
																				WF25RM
																				WF26R
																				WF30RE
Flashlight - WT Series																				
																				WT16R
																				WT25R
Flashlight - S Series																				
																				SW05R-UV
																				SW05R-RED
Tactical Light - GL Series																				
																				GL06/GL06-365
																				GL19R
																				GL22
																				GL23R
																				GL19R V2.0
Headlamp - HL Series																				
																				HL12R V2.0
																				HL16
																				HL18R-T
																				HL18R-T V2.0
																				HL32R-T
																				HL40R
																				HL45R
Headlamp - HM Series																				
																				HM23 V2.0
																				HM50R V2.0
																				HM60R
																				HM61R V2.0
																				HM62-T
																				HM65R
																				HM65R-T V2.0
																				HM70R
																				HM71R
																				HM75R
Headlamp - HP Series																				
																				HP12R-T



FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery					Battery Holder	Diffuser Tip			Filter Adapter		Traffic Wand				Rail Mount				Remote Switch	
	ARB					ALF	AOD			AOF		AOT				ALG				AER	
	L14 (14500)	L16 (16340)	L18 (18350)	L18 (18650)	L21 (21700)	18	S V2.0	M	04	S+V2.0	L	S+	M	03	04	00	15	16	18	02 V2.0	03 V2.0
HP16R																					
HP25R V2.0																					
HP30R V2.0																					
HP35R																					
Headlamp - WH Series																					
WH23R																					
WH30RE																					
Bicycle Light - BC Series																					
BC05R V2.0																					
BC06R																					
BC15R																					
BC21R V3.0																					
BC22R																					
BC25R																					
BC26R																					
BC30 V2.0																					
Camping Lantern - CL Series																					
CL20R																					
CL22R																					
CL26R PRO																					
CL27R																					
CL28R																					
CL30R																					

Remote Switch			Flashlight Holster			Tactical Flashlight Ring	Headlamp Storage Bag		Headlamp Attachment		Headband				Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Helmet Holder	Bicycle Light Holder	Wrist Flashlight Holder	Lanyard	MODEL
AER			ALP			ALR	APB		ALG		AFH				ALB	ALD	ALD	ALD	ALW	ALL	
04	05	06s	10s	10L	20	01	20	30	03 V2.0	04	02	03	10	05	10	05	08	10	01	01	
																					HP16R
																					HP25R V2.0
																					HP30R V2.0
																					HP35R
Headlamp - WH Series																					
																					WH23R
																					WH30RE
Bicycle Light - BC Series																					
																					BC05R V2.0
																					BC06R
																					BC15R
																					BC21R V3.0
																					BC22R
																					BC25R
																					BC26R
																					BC30 V2.0
Camping Lantern - CL Series																					
																					CL20R
																					CL22R
																					CL26R PRO
																					CL27R
																					CL28R
																					CL30R



FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME		DISTANCE
E01 V2.0	High	100 lm	Alkaline Battery 50 min	Ni-MH Battery 50 min	35 m
	Med	25 lm	4 h 50 min	4 h 30 min	19 m
	Low	5 lm	25 h	23 h	9 m
E03R V2.0	High	500 lm	1 h 20 min		90 m
	Med	150 lm	2 h		50 m
	Low	30 lm	6 h 35 min		20 m
	Eco	5 lm	30 h		9 m
	Red	5 lm	/		/
E05R	Red Flash	5 lm	/		/
	Breathing Light	1 lm	/		/
	Instant Burst	400 lm	/		64 m
E06R	High	150 lm	55 min		40 m
	Med	25 lm	5 h		17 m
	Low	3 lm	30 h		8 m
	High	700 lm	1 h 20 min		110 m
	Med	150 lm	2 h 50 min		50 m
	Low	30 lm	12 h		23 m
	Eco	5 lm	60 h		9 m
	RGB	0.5 lm	/		/
	Red Flash	1 lm	/		/
	Blue Flash	1 lm	/		/
E09R	Red & Blue Flash	1 lm	/		/
	UV Light	580mW 365nm	/		/
	Red Laser	≤0.39mW	/		/
	Burst	600 lm	/		124 m
	High	300 lm	1.5 h		91 m
E12 V3.0	Med	100 lm	4 h		56 m
	Low	25 lm	16 h		28 m
	Moonlight	3 lm	70 h		9 m
E18R V2.0	High	200 lm	1 h		78 m
	Med	30 lm	15 h		30 m
	Low	5 lm	100 h		12 m
	Turbo	1200 lm	1 h		146 m
	High	350 lm	2 h		81 m
	Med	150 lm	3 h 20 min		53 m
E20 V2.0	Low	30 lm	17 h		23 m
	Moonlight	1 lm	228 h		9 m
	Strobe	1200 lm	/		/
E20 V2.0	High	350 lm	Alkaline Battery 3 h 45 min	Ni-MH Battery 1 h 30 min	126 m
	Med	150 lm	11 h 15 min	5 h 30 min	76 m
	Low	30 lm	93 h 35 min	34 h 30 min	35 m
	Eco	5 lm	200 h	140 h	15 m

MODEL		OUTPUT	RUNTIME		DISTANCE
E28R V2.0	General Mode	Turbo	1700 lm	2 h 10 min	273 m
		High	600 lm	2 h 50 min	164 m
		Med	150 lm	17 h 15 min	80 m
		Low	50 lm	36 h 50 min	45 m
		Eco	5 lm	260 h	15 m
	Flash Mode	Strobe	1700 lm	/	/
	Warning Light	1 lm	/	/	/
E35R	General Mode	Turbo	3100 lm	2 h 30 min	260 m
		High	1000 lm	3 h 40 min	138 m
		Med	350 lm	9 h 20 min	80 m
		Low	150 lm	21 h 20 min	54 m
		Eco	30 lm	69 h	25 m
E-CP	General Mode	Strobe	3100 lm	/	/
		Turbo	1600 lm	2 h 30 min	222 m
		High	350 lm	8 h 30 min	105 m
		Med	150 lm	20 h	69 m
		Low	30 lm	84 h	33 m
E-STAR	General Mode	Eco	3 lm	504 h	10 m
		Strobe	1600 lm	/	/
		Turbo	100 lm	/	40 m
		High	20 lm	10 h	18 m
		Med	3 lm	60 h/∞	7 m
LD12R	General Mode	Low	1 lm	120 h/∞	4 m
	Main Light	High	600 lm	1 h 20 min	186 m
		Med	150 lm	3 h 20 min	90 m
		Low	30 lm	16 h 20 min	40 m
	Side Light	Moonlight	1 lm	110 h	9 m
LD22 V2.0	General Mode	High	100 lm	4 h	12 m
		Med	30 lm	14 h 30 min	7 m
		Low	5 lm	53 h	3 m
		Turbo	AA /	ARB-L14-1600U2 800 lm	1 h 20 min
		High	350 lm	1 h 15 min	2 h 30 min
	Flash Mode	Med	100 lm	5 h 50 min	10 h
		Low	30 lm	19 h 45 min	32 h
		Eco	2 lm	190 h	319 h
		Strobe	350 lm	800 lm	/
		SOS	100 lm	100 lm	/
LD30R	General Mode	Turbo	1700 lm	2 h 10 min	267 m
		High	600 lm	2 h 50 min	161 m
		Med	150 lm	14 h 40 min	80 m
		Low	50 lm	37 h 25 min	45 m
		Moonlight	1 lm	750 h	8 m
	Flash Mode	Strobe	1700 lm	/	/
		SOS	50 lm	/	/

MODEL		OUTPUT	RUNTIME		DISTANCE
LD45R	General Mode	Turbo	2800 lm	2 h 40 min	Spotlight 480 m
		High	1000 lm	2 h 50 min	Floodlight 164 m
		Med	350 lm	6 h 40 min	289 m
		Low	150 lm	16 h 40 min	101 m
		Eco	20 lm	65 h	173 m
		Strobe	2800 lm	/	58 m
	Flash Mode	SOS	150 lm	/	113 m
		Strobe	2800 lm	/	38 m
PD25R	General Mode	Turbo	800 lm	55 min	41 m
		High	350 lm	1 h 40 min	14 m
		Med	150 lm	3 h 30 min	/
		Low	30 lm	20 h 40 min	/
		Eco	5 lm	80 h	250 m
		Strobe	800 lm	/	164 m
PD32R	General Mode	Turbo	1400 lm	2 h 20 min	107 m
		High	350 lm	4 h 25 min	48 m
		Med	100 lm	16 h 20 min	19 m
		Low	20 lm	70 h	/
		Strobe	1400 lm	/	/
		Strobe	1400 lm	/	/
PD35 V3.0	General Mode	Turbo	1700 lm	1 h 44 min	344 m
		High	600 lm	3 h 26 min	175 m
		Med	150 lm	11 h 5 min	92 m
		Low	50 lm	34 h 5 min	42 m
		Eco	5 lm	300 h	63 m
		Strobe	1700 lm	/	/
PD35R	General Mode	Turbo	1700 lm	2 h 15 min	353 m
		High	1000 lm	2 h 55 min	278 m
		Med	350 lm	4 h 45 min	163 m
		Low	50 lm	38 h	60 m
		Eco	10 lm	100 h	26 m
		Strobe	1700 lm	/	/
PD36R V2.0	General Mode	Turbo	1700 lm	3 h 30 min	396 m
		High	800 lm	4 h 15 min	268 m
		Med	350 lm	7 h 45 min	177 m
		Low	50 lm	50 h	67 m
		Eco	5 lm	482 h	19 m
		Strobe	1700 lm	/	/
PD36R Pro	General Mode	Turbo	2800 lm	3 h 30 min	380 m
		High	1000 lm	3 h 55 min	225 m
		Med	350 lm	8 h 15 min	130 m
		Low	150 lm	19 h	90 m
		Eco	30 lm	42 h	40 m
		Strobe	2500 lm	/	/

MODEL		OUTPUT	RUNTIME		DISTANCE
PD36 TAC	Tactical Mode	High	2000 lm	3 h 10 min	225 m
		Strobe	2000 lm	/	/
	Duty Mode	Turbo	3000 lm	1 h 30 min	274 m
		High	1000 lm	3 h 15 min	160 m
		Med	350 lm	10 h 10 min	92 m
		Low	150 lm	18 h 45 min	59 m
		Eco	30 lm	43 h 10 min	25 m
		Strobe	2000 lm	/	/
PD40R V3.0	General Mode	Turbo	3000 lm	2 h 40 min	500 m
		High	1000 lm	3 h 10 min	300 m
		Med	350 lm	8 h 30 min	175 m
		Low	30 lm	89 h	50 m
		SOS	350 lm	/	/
		Strobe	3000 lm	/	/
TK05R	General Mode	High	1000 lm	50 min	450 m
		Med	350 lm	1 h 45 min	260 m
		Low	30 lm	14 h 30 min	75 m
		Strobe	1000 lm	/	/
		Strobe	1000 lm	/	/
TK11R	General Mode	High	1600 lm	1 h 50 min	420 m
		Med	350 lm	4 h 10 min	200 m
		Low	30 lm	25 h 30 min	60 m
		Strobe	1600 lm	/	/
TK16 V2.0	General Mode	Turbo	3100 lm	2 h 40 min	380 m
		High	1000 lm	2 h 50 min	220 m
		Med	350 lm	8 h 20 min	125 m
		Low	150 lm	19 h 10 min	80 m
		Eco	30 lm	43 h 20 min	40 m
		Strobe	3100 lm	/	/
TK20R V2.0	General Mode	Turbo	3000 lm	2 h 50 min	475 m
		High	1000 lm	3 h 10 min	265 m
		Med	350 lm	7 h	150 m
		Low	150 lm	21 h 20 min	100 m
		Eco	30 lm	48 h	45 m
TK22R	Duty Mode	Strobe	3000 lm	/	/
		Turbo	3200 lm	2 h 15 min	480 m
		High	1000 lm	2 h 35 min	265 m
		Med	350 lm	7 h 45 min	155 m
	Lock/OFF Mode	/	/	/	/



FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE	
TK26R	Turbo	1500 lm	1 h 15 min	350 m	
	High	350 lm	4 h 27 min	170 m	
	Med	150 lm	10 h 18 min	110 m	
	Low	10 lm	100 h	30 m	
	Strobe	1500 lm	/	/	
	Red Light	150 lm	4 h 10 min	30 m	
	Green Light	200 lm	5 h	40 m	
TK30R	General Mode	High	500 lm	3 h 30 min	1500 m
		Low	100 lm	8 h 50 min	600 m
	Strobe Mode	500 lm	/	/	
TK35UE V2.0	Tactical Mode	Tactical	3500 lm	1 h 50 min	320 m
		Strobe	3500 lm	/	/
	Duty Mode	Turbo	5000 lm	1 h 40 min	400 m
		High	2000 lm	2 h	250 m
		Med	800 lm	4 h	160 m
		Low	350 lm	13 h 40 min	100 m
		Eco	30 lm	85 h	32 m
		Strobe	3500 lm	/	/
HT18R	Turbo	2800 lm	1 h 40 min	1100 m	
	High	1000 lm	2 h 15 min	670 m	
	Med	350 lm	6 h 30 min	400 m	
	Low	30 lm	42 h	100 m	
	Strobe	2600 lm	/	/	
	SOS	150 lm	40 h	200 m	
HT32	White Light Mode	Turbo	2500 lm	1 h 50 min	640 m
		High	1000 lm	2 h 30 min	420 m
		Med	350 lm	8 h	250 m
		Low	50 lm	29 h	100 m
		Strobe	2500 lm	/	/
	Red Light Mode	High	400 lm	3 h 15 min	120 m
		Low	150 lm	4 h 50 min	70 m
		Green Light Mode	High	1400 lm	2 h 30 min
Low	350 lm		6 h	100 m	
LR36R	Floodlight Mode	High	10000 lm	2 h 3 min	326 m
		Med	5000 lm	2 h 32 min	212 m
		Low	50 lm	102 h	20 m
	Laser Mode	High	350 lm	4 h 3 min	1260 m
		Low	50 lm	16 h 30 min	527 m
	Floodlight-Laser Mode	High	10000 lm	2 h 27 min	1250 m
		Low	100 lm	15 h	514 m
	Special Mode	Strobe	10000 lm	/	/
		SOS	50 lm	38 h	527 m

MODEL		OUTPUT	RUNTIME	DISTANCE	
LR40R V2.0	Spotlight Mode	High	3000 lm	3 h	886 m
		Med	1500 lm	3 h 40 min	650 m
		Low	500 lm	14 h 10 min	380 m
		Eco	10 lm	177 h	60 m
	Floodlight Mode	Turbo	12000 lm	2 h 30 min	340 m
		High	8000 lm	2 h 30 min	280 m
		Med	3000 lm	3 h	170 m
		Low	1000 lm	11 h	100 m
	Spot-and-floodlight Mode	Eco	100 lm	50 h	30 m
		Turbo	15000 lm	2 h 30 min	900 m
		High	10000 lm	2 h 30 min	780 m
		Med	5000 lm	2 h 40 min	591 m
		Low	1500 lm	6 h	387 m
	Flash Mode	Eco	300 lm	25 h	250 m
		Strobe	15000 lm	/	
		SOS	500 lm	/	
LR50R	General Mode	Turbo	12000 lm	1 h 50 min	950 m
		High II	6000 lm	2 h 20 min	690 m
		High I	3000 lm	2 h 40 min	480 m
		Med	1000 lm	7 h 40 min	280 m
		Low	350 lm	24 h	165 m
		Eco	50 lm	58 h	70 m
	Functional Mode	Turbo	12000 lm	1 h 50 min	950 m
		Strobe	6000 lm	/	/
		SOS	350 lm	/	/
LR60R	Search Mode(Long Range Searching)	Turbo	21000 lm	1 h 50 min	1085 m
		High	3000 lm	3 h 45 min	1000 m
		Med	1000 lm	10 h 40 min	607 m
		Low	300 lm	24 h 20 min	330 m
		Eco	50 lm	113 h	132 m
	Camp Mode(Long Area Lighting)	Med	2000 lm	5 h 25 min	126 m
		High	6000 lm	3 h	218 m
		Turbo	15000 lm	2 h 10 min	352 m
		SOS	300 lm	/	/
		Strobe	9000 lm	/	/
LR80R	High-output Mode	Turbo	18000 lm	2 h	1130 m
		High	12000 lm	2 h 15 min	920 m
		Med	6000 lm	2 h 50 min	650 m
		Low	3000 lm	5 h 10 min	465 m
		High	1000 lm	15 h 40 min	265 m
		Med	450 lm	39 h	175 m
	Low-output Mode	Low	150 lm	92 h	105 m
		Eco	50 lm	300 h	50 m
		Strobe	6000 lm	/	/
		SOS	150 lm	/	/

MODEL		OUTPUT	RUNTIME	DISTANCE			
SW05R-RED	High	150 lm	2 h 32 min	39 m			
	Med	30 lm	12 h 17 min	17 m			
	Low	5 lm	49 h	7 m			
	Red Constant-on	10 lm	10 h 2 min	5 m			
	Red Flash	3 lm	61 h 51 min	/			
SW05R-UV	High	150 lm	2 h 32 min	39 m			
	Med	30 lm	12 h 17 min	17 m			
	Low	5 lm	49 h	7 m			
	UV Light	1500 mW	3 h 14 min	/			
WF05E	High	85 lm	11.5 h	54 m			
	Med	30 lm	35 h	29 m			
	Low	10 lm	80 h	18 m			
WF11E	High	200 lm	10 h	185 m			
	Med	100 lm	29.5 h	141 m			
	Low	30 lm	70 h	81 m			
WF25RM	White Light	Burst	3000 lm	1 h 50 min	370 m		
		High	1000 lm	3 h 10 min	210 m		
		Med	400 lm	7 h 30 min	130 m		
		Low	150 lm	22 h 20 min	80 m		
		Eco	30 lm	77 h	30 m		
		UV Light	500mW	/	/		
		WF26R	General Mode	Turbo	3000 lm	2 h 41 min	450 m
				High	1000 lm	2 h 47 min	264 m
Med	350 lm			8 h 56 min	155 m		
Eco	30 lm			44 h 8 min	47 m		
Flash Mode	Strobe		3000 lm	/	/		
	SOS		100 lm	/	/		
WF30RE	Turbo	300 lm	6 h 41 min	150 m			
	High	200 lm	10 h 57 min	123 m			
	Med	100 lm	21 h	87 m			
	Low	5 lm	320 h	19 m			
WT16R	Spotlight Mode Floodlight Mode	High	300 lm	3 h 50 min	115 m		
		Med	100 lm	9 h 20 min	65 m		
		Low	30 lm	30 h	35 m		
		High	300 lm	3 h 50 min	23 m		
		Low	100 lm	9 h 20 min	14 m		
		Yellow Flash	10 lm	/	/		
WT25R	General Mode	Turbo	1000 lm	3 h 40 min	220 m		
		High	400 lm	4 h 50 min	145 m		
		Med	150 lm	11 h	85 m		
		Low	50 lm	29 h	50 m		
	Flash Mode	Strobe	1000 lm	/	/		
		SOS	50 lm	/	/		

MODEL		OUTPUT	RUNTIME		DISTANCE		
HL16	White Light	Turbo	450 lm	3 h		104 m	
		High	150 lm	8 h		58 m	
		Med	50 lm	27 h		32 m	
		Low	5 lm	100 h		10 m	
	Red Light	Red Light	5 lm	100 h		6 m	
		SOS	5 lm	200 h		6 m	
HL32R-T	Spotlight Mode	High	800 lm	3 h		132 m	
		Med	200 lm	8 h		66 m	
		Low	70 lm	20 h		38 m	
	Floodlight Mode	High	200 lm	8 h		30 m	
		Med	70 lm	20 h		17 m	
		Low	5 lm	150 h		5 m	
		SOS	5 lm	300 h		5 m	
		HL40R	General Mode	High	300 lm	4.5 h	
Med	130 lm			11 h		64 m	19 m
Low	70 lm			22 h		46 m	14 m
Eco	30 lm			50 h		30 m	9 m
Functional Mode	Reading		4 lm	200 h		10 m	4 m
	SOS		30 lm	100 h		30 m	9 m
	Burst		600 lm	1 h 20 min		147 m	43 m
	HL45R		White Light Mode	Turbo	1000 lm	3 h	
High		350 lm		4 h 20 min		135 m	
Med		130 lm		12 h 40 min		82 m	
Low		30 lm		54 h		39 m	
Red Light Mode		High	130 lm	4 h 20 min		27 m	
		Med	30 lm	25 h 30 min		9 m	
		Low	5 lm	124 h		4 m	
		Flash	5 lm	240 h		/	
HM23 V2.0	White Light	High	300 lm	AA battery 5 h 22 min	ARB-L14-2200U 9 h	88 m	
		Med	50 lm	11 h 30 min	14 h	34 m	
		Low	3 lm	100 h	90 h	8 m	
	Red Light	Constant-on	5 lm	17 h	18 h	5 m	
		Flash	5 lm	34 h	36 h	/	
HM50R V2.0	White Light	Turbo	700 lm	1 h		115 m	
		High	400 lm	3 h		86 m	
		Med	130 lm	8 h		49 m	
		Low	30 lm	42 h		23 m	
	Red Light	Red Light	5 lm	60 h		6 m	
		Red Flash	5 lm	120 h		6 m	



FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE	
HM60R	Spotlight Mode	Turbo	1300 lm	2 h	120 m
		High	350 lm	8 h	60 m
		Med	130 lm	18 h	36 m
		Low	30 lm	54 h	18 m
	Floodlight Mode	High	350 lm	8 h	33 m
		Med	70 lm	24 h	15 m
		Low	5 lm	300 h	6 m
		Red	5 lm	100 h	5 m
		SOS	5 lm	200 h	5 m
HM61R V2.0	White Light	Turbo	1600 lm	2 h	162 m
		High	600 lm	3 h	97 m
		Med	150 lm	12 h	47 m
		Low	50 lm	35 h	28 m
		Eco	5 lm	300 h	9 m
	Red Light	Low	1 lm	400 h	/
		Med	5 lm	80 h	/
		Flash	5 lm	160 h	/
HM62-T	White Light	Turbo	1200 lm	4 h	150 m
		High	400 lm	12 h	80 m
		Med	130 lm	23 h 40 min	45 m
		Low	5 lm	280 h	8 m
	Red Light	Constant-on	5 lm	60 h	8 m
HM65R	Spotlight Mode	Turbo	1000 lm	4 h	163 m
		High	400 lm	22 h	101 m
		Med	130 lm	42 h	57 m
		Low	50 lm	90 h	37 m
	Floodlight Mode	High	400 lm	20 h	55 m
		Med	130 lm	48 h	30 m
		Low	8 lm	280 h	6 m
HM65R-T V2.0	White Light	High	1600 lm	3 h	170 m
		Med	400 lm	12 h	83 m
		Low	130 lm	24 h	49 m
	Warm White Light	High	800 lm	6 h	112 m
		Med	400 lm	12 h	82 m
		Low	130 lm	24 h	48 m
		Eco	5 lm	300 h	10 m
		SOS	5 lm	600 h	10 m
HM70R	General Mode	Turbo	1600 lm	4 h	186 m
		High	500 lm	6 h	105 m
		Med	150 lm	30 h	53 m
		Low	30 lm	100 h	26 m
	Functional Mode	Red	5 lm	400 h	5 m
		Med	70 lm	48 h	16 m
		High	400 lm	8 h	38 m
		SOS	5 lm	800 h	5 m

MODEL		OUTPUT		RUNTIME		DISTANCE		
HM71R	Spotlight Mode	Turbo	2700 lm	3 h		230 m		
		High	800 lm	5 h		104 m		
		Med	200 lm	16 h		52 m		
		Low	50 lm	48 h		27 m		
	Floodlight Mode	High	500 lm	8 h		47 m		
		Med	200 lm	16 h		30 m		
		Low	50 lm	48 h		14 m		
		Read	5 lm	400 h		5 m		
HM75R	Spotlight Mode		ARB-L18-3400	ARB-L18-3400	ARB-L18-3400	ARB-L18-3400	ARB-L18-3400	
			ARB-L21-5000 V2.0	ARB-L21-5000 V2.0	ARB-L21-5000 V2.0	ARB-L21-5000 V2.0	ARB-L21-5000 V2.0	
		Turbo	1600 lm	1200 lm	1 h 30 min	9 h	223 m	190 m
		High	800 lm	800 lm	3 h 30 min	10 h 30 min	158 m	158 m
		Med	350 lm	350 lm	11 h	18 h 20 min	101 m	101 m
	Floodlight Mode	Low	50 lm	50 lm	50 h 50 min	88 h 40 min	39 m	39 m
		Turbo	1000 lm	700 lm	1 h 50 min	13 h	60 m	48.5 m
		High	400 lm	400 lm	4 h	14 h	43 m	43 m
		Med	150 lm	150 lm	8 h	18 h	25 m	25 m
		Low	5 lm	5 lm	100 h	234 h	5 m	5 m
	Red Light Mode	High	120 lm	120 lm	5 h 20 min	19 h 40 min	16 m	16 m
		Med	30 lm	30 lm	32 h	46 h 20 min	9 m	9 m
		Low	5 lm	5 lm	110 h	265 h	4 m	4 m
		Flash	5 lm	5 lm	220 h	530 h	/	/
HP16R	General Mode	Turbo	1250 lm	4 h			225 m	
		High	400 lm	8 h			149 m	
		Med	150 lm	12 h			88 m	
		Low	50 lm	36 h			52 m	
	Functional Mode	High	400 lm	8 h			48 m	
		Med	150 lm	12 h			30 m	
		Low	5 lm	300 h			6 m	
		Red	5 lm	300 h			6 m	
		Flash	5 lm	600 h			6 m	
HP25R V2.0	General Mode			In water	In air			
		Turbo	1600 lm	2 h	6 h	290 m		
		High	1000 lm	4 h	7 h	228 m		
		Med	400 lm	8 h	8 h	140 m		
		Low	150 lm	24 h	24 h	83 m		
		Eco	50 lm	56 h	56 h	59 m		
	Functional Mode	High	400 lm	8 h	8 h	50 m		
		Med	150 lm	24 h	24 h	30 m		
		Low	5 lm	400 h	400 h	8 m		
		Red	5 lm	400 h	400 h	6 m		
		SOS	5 lm	800 h	800 h	6 m		

MODEL			OUTPUT	RUNTIME			DISTANCE
HP30R V2.0	Spotlight Mode	Turbo	2000 lm	6 h			251 m
		High	800 lm	12 h			156 m
		Med	200 lm	34 h			78 m
		Low	50 lm	120 h			42 m
	Floodlight Mode	High	1000 lm	10 h			78 m
		Med	200 lm	34 h			34 m
		Low	50 lm	120 h			17 m
	Spot & floodlight Mode	Turbo	3000 lm	5 h			270 m
		High	1800 lm	6 h			177 m
		Med	400 lm	17 h			85 m
		Low	100 lm	60 h			45 m
	HP35R	Spotlight Mode	Turbo	3000 lm	5 h 43 min		
High			800 lm	11 h 40 min			230 m
Med			350 lm	28 h 24 min			151 m
Low			50 lm	120 h			56 m
Floodlight Mode		Turbo	1200 lm	8 h			122 m
		High	400 lm	30 h 48 min			68 m
		Med	50 lm	120 h			24 m
		Low	5 lm	500 h			7 m
Spot-and-floodlight Mode		Turbo	4000 lm	4 h 17 min			450 m
		High	1200 lm	8 h			241 m
		Med	400 lm	18 h			153 m
		Low	50 lm	120 h			55 m
WH23R	Spotlight Mode	High	300 lm	6 h 19 min			84 m
		Med	120 lm	9 h 32 min			53 m
		Low	30 lm	35 h 57 min			26 m
	Floodlight Mode	High	300 lm	6 h 19 min			35 m
		Med	70 lm	15 h 36 min			17 m
		Low	5 lm	150 h			5 m
	Spotlight+ floodlight	Turbo	600 lm	3 h 49 min			100 m
GL06/ GL06-365	White Light	ARB-L16-800UP	600 lm	60 min			140 m
		CR123A	400 lm	1 h 30 min			/
	Strobe	/	/			/	
GL19R V2.0	White Light	1200 lm	55 min			420 m	
GL22	White Light	ARB-L16-800UP	CR123A	ARB-L16-800UP	CR123A	ARB-L16-800UP	CR123A
		750 lm	500 lm	55 min	1h	180 m	140m
	Red Laser	/	/	20 h	24 h	/	/
	Strobe	750 lm	500 lm	/	/	/	/
GL23R	White Light	1200 lm	1 h			240 m	
	White Light + Green Laser	1200 lm + 520nm green lasers5mW	1 h			240 m	
	Green Laser	520nm green lasers5mW	13 h			/	

MODEL		OUTPUT	RUNTIME	DISTANCE	
BC05R V2.0	High Flash(Fast)	15 lm	35 h	50 m	
	High Flash(Slow)	15 lm	25 h		
	High	15 lm	4.5 h		
	Low Flash(Fast)	5 lm	120 h		
	Low Flash(Slow)	5 lm	80 h		
	Low	5 lm	16 h		
BC06R	Low	Spinning	10 lm	22 h	100 m
		Constant-on	10 lm	12 h 30 min	
		Slow Flashing	10 lm	14 h 30 min	
		Fast Flashing	10 lm	24 h 30 min	
	High	Constant-on	30 lm	5 h 30 min	
		Slow Flashing	30 lm	5 h 30 min	
		Fast Flashing	30 lm	8 h	
		Braking	90 lm	/	
BC15R	High	400 lm	3 h 40 min	78 m	
	Med	150 lm	10 h 30 min	47 m	
	Low	50 lm	31 h 30 min	28 m	
	Flash	400/50 lm	/	/	
BC22R	Turbo	1400 lm	2 h 20 min	156 m	
	High	600 lm	5 h 30 min	100 m	
	Med	200 lm	11 h	57 m	
	Low	50 lm	41 h	28 m	
	Flash	200/50 lm	/	/	
BC25R	Turbo	600 lm	2 h	106 m	
	High	350 lm	7 h	79 m	
	Med	150 lm	15 h	53 m	
	Low	50 lm	36 h	32 m	
	Flash	150 lm	/	/	
BC26R	Turbo	1600 lm	3 h 30 min	169 m	
	High	600 lm	9 h 30 min	101 m	
	Med	200 lm	18 h	57 m	
	Low	50 lm	65 h	28 m	
	Flash	600 lm	/	/	
BC30R V2.0	Burst	2200 lm	/	187 m	
	High	1500 lm	2.3 h	155 m	
	Med	600 lm	6 h	96 m	
	Low	200 lm	16 h	56 m	
	EDC/Eco	50 lm	50 h	28 m	
	Flash	600/50 lm	/	/	
CL20R	General Mode	Turbo	300 lm	6 h	15 m (Max)
		High	130 lm	12 h	
		Med	40 lm	20 h	
		Low	1 lm	200 h	
	Red Mode	Flash	1.5 lm	/	
		Constant on	1.5 lm	100 h	



FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME		DISTANCE	
CL22R	General Mode	360°(High)	200 lm	10 h 12 min		80 m
		360°(Med)	100 lm	18 h		
		360°(Low)	5 lm	160 h		
		Down(High)	300 lm	7 h 15 min		
		Down(Med)	150 lm	11 h 10 min		
		Down(Low)	5 lm	200 h		
		Combined (High)	500 lm	4 h		
		Combined (Low)	10 lm	85 h		
	Scene Mode	Red Constant-on	10 lm	50 h		
		Red Flashing	5 lm	100 h		
		Colors Jumping	17 lm	/		
		Colors Morphing	17 lm	/		
CL26R PRO	High	500 lm	10 h		15 m	
	Med	200 lm	13 h			
	Low	50 lm	40 h			
	Front	25 lm	67 h			
	Down 1	5 lm	408 h			
	Down 2	50 lm	58 h			
	Down 3	150 lm	15 h			
	Red Light	3 lm	125 h			
	Red Flash	3 lm	240 h			
CL27R	Floodlight Mode	High	1200 lm	4 h 18 min		53 m
		Med	600 lm	5 h 30 min		37 m
		Low	10 lm	170 h		5 m
	Spotlight Mode	High	800 lm	8 h		177 m
		Med	400 lm	10 h 15 min		123 m
		Low	5 lm	285 h		16 m
	Strobe Mode	High	1600 lm	3 h 50 min		180 m
		Low	15 lm	100 h		18 m
	Red Light Mode	Constant-on	10 lm	72 h		4.5 m
		Flashing	10 lm	144 h		4.5 m
CL28R	White Light	High	2000 lm	9 h		58 m
		Med	1000 lm	10 h		42 m
		Low	10 lm	360 h		4 m
	Red Light	Red Constant-on	9 lm	170 h		4.5 m
		Red Flash	9 lm	340 h		/
CL30R	Turbo	650 lm	2600mAh	3500mAh	35 m	
			4 h 30 min	6 h		
		High	350 lm	9 h		12 h
		Med	100 lm	38 h		51 h
		Low	50 lm	70 h		93 h
		Eco	10 lm	300 h		400 h
Flash	100 lm	70 h	93 h			





# Brand Honor





# LIGHTING FOR EXTREMES

Upholding the spirit of challenging limits and striving for excellence, **Fenix** offers reliable, professional, and innovative products and services to support users to accomplish their dreams in extreme environments.





# CUSTOMER SERVICE

## Fenix Product Warranty Terms

### 15 Days Free Replacement

15 days free replacement: Fenix will replace a new product within 15 days of purchase for any manufacturing defects if problems come into being in normal use; We will replace it with the same model. If the model has been discontinued, customers will receive a product with a similar or improved model.

### 5 Years Free Repair

5 years free repair: Fenix will offer free repair within 5 years for lights from the date of purchase if a problem develops with normal use. Different warranty periods for different products:

Product Type	Warranty
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (included rechargeable lights but not built-in battery)	5 years battery for 1 year
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (with built-in battery)	2 years (battery included)
Rechargeable batteries, chargers, bike mount, and remote pressure switch	1 year

### Limited Lifetime Warranty

Limited lifetime warranty: For lights past the free repair warranty period, we provide lifetime repairs but will charge for parts. The distributor will notify the customer of the cost of the part before repair.

### Extended Warranty Service

An extra 6-month warranty period is obtained once you have successfully registered on the official website for Fenixlight Limited ([www.fenixlight.com](http://www.fenixlight.com)), which only applies to flashlights, tactical lights, headlamps, bike lights and camping lanterns.

### Warranty Certificate

Customers requesting after-sales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

### The free warranty does not cover any damages or failure caused by:

- (1) Normal wear
- (2) Rough operation
- (3) Battery leakage
- (4) Any defects or damages caused by the improper operations include but not limited to the operation which doesn't comply with the warranty or notes shown in the product specification. For example, the product specification will describe that please don't disassemble the sealed head, as doing so can damage the flashlight and will void the warranty.
- (5) Any defects or damage led by other behaviors which can not be controlled by Fenix reasonably.

### For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions)  
service\_1@fenixlight.com (Asia/Oceania/Africa regions)  
Tel: +86 400 8866 093 /+86 755 2963 1193



## CONTACT US



Facebook



Instagram



YouTube