


FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181 E-mail: info@fenixlight.com Web: www.fenixlight.com

2F/3F, West of Building A, Xinghong Technology Park, 111 Shuiku Road, Fenghuanggang Community, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province, China

69.999.999.750-A1-2021112

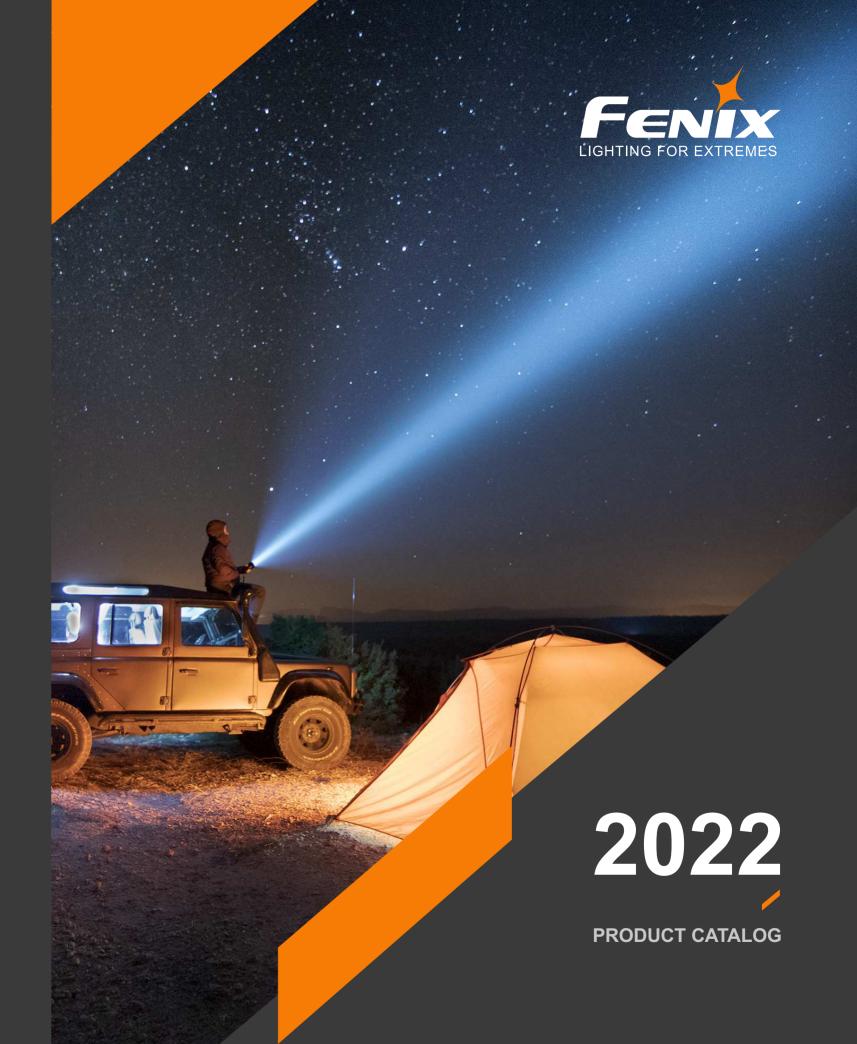



BRAND OVERVIEW

Founded in 2001, Fenix has developed into a China national high-tech enterprise, specializing in R&D, manufacturing and selling of mobile lighting tools, including flashlights, tactical lights, headlamps, bicycle lights, camping lanterns and lighting accessories. Fenix products are widely used in the following environments: outdoor sports, industrial, law enforcement, military, EDC (everyday carry), etc.

Fenix products are now being sold in more than 100 countries around the world, reaching tens of millions of users worldwide. Concentrating on the development of LED lighting tools of high performance and reliability, Fenix has won recognition and praise from users for its excellent products and service. Fenix has become known worldwide as a premium LED lighting brand based on each product's excellent performance and reliable quality.

The best design is derived from the actual needs of users. Fenix aims to satisfy customers' pursuit of versatile, mobile lighting products. With the mission of "Lighting For Extremes", Fenix is committed to becoming the world's No.1 mobile lighting brand.

2001

ESTABLISHMENT


100+

COUNTRIES AND REGIONS

10M+

CONSUMER USERS

BRAND HONOR

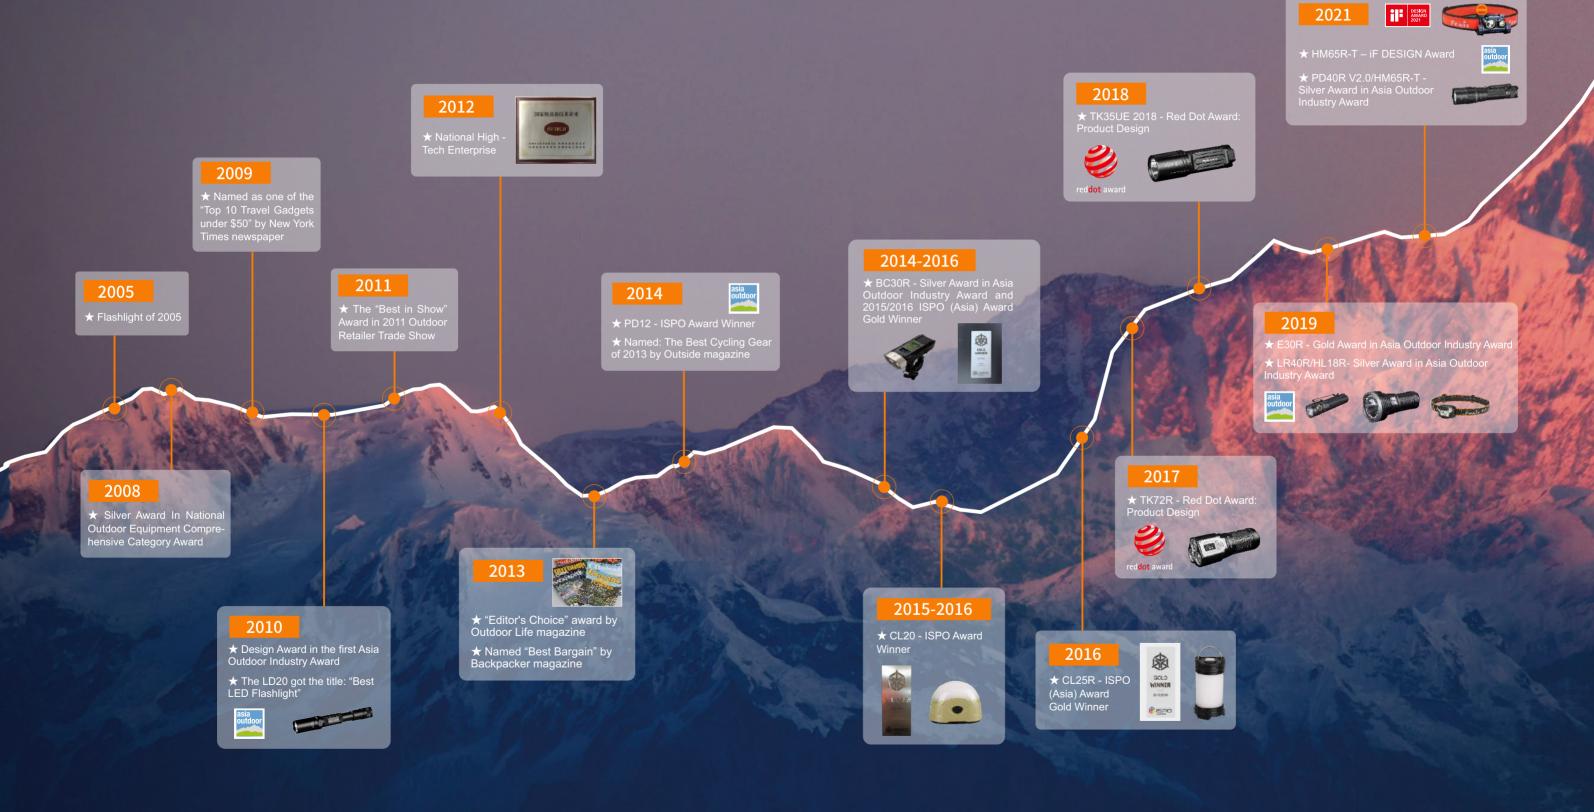

WORLDWIDE SALES NETWORK

2005-2008

Fenix products entered the United States, Germany, Netherlands, Finland, Switzerland, Canada, Thailand, Denmark, Britain, Italy, France, Hong Kong, South Korea, Russia, Japan, Taiwan, Singapore, Malaysia, South Africa, Australia, etc.

2009-2013

Fenix products continued to expand the map, entered Saudi Arabia, Indonesia, Sweden, Norway, India, Czech Republic, Israel, UAE, Poland, Vietnam, Kazakhstan, Brazil, Spain and other markets.

Since 2014

Fenix products have been in more than 100 countries and regions around the world, and the sales network has achieved a global layout.





Fenix products are now being sold in many mainstream sales channels in domestic and overseas.

- REI The world's largest outdoor chain channel.
- o Grainger The largest industrial chain channel in the United States. Dick's Sporting Goods The largest outdoor chain channel in the United States. Galls Leading chain store of public safety equipment and uniforms. Bass Pro Shops The Best in Fishing, Hunting and Boating Gear.
- ⊙ Globetrotter Germany's most influential outdoor chain channel.
- Frankonia The largest hunting chain channel.
- MEC Canada's largest outdoor chain channel.
- O PARTIOAITTA A well-known Finnish outdoor chain channel.
- O Bever The largest outdoor chain channel in the Netherlands.
- Tiexuejunpinxing China's most well-known military product chain stores. Sanfu Outdoor the largest outdoor chain channel. Firefox Outdoor, Zhongjiahe Outdoor, etc.
- PROTrek The largest outdoor chain channel in Hong Kong, China

























LIGHTING FOR EXTREMES

Harsh environment tests

Fenix products are tested in accordance with the international ANSI standards. All products withstand more than 30 rigorous tests including high-strength water immersion, dust proofing, impact resistance, high and low temperature, etc. All these ensure that Fenix products can pass the tests of various conditions or harsh environments and provide users with secure and reliable lighting.



In order to verify the performance of the product after a drop, 3-5 samples will be randomly selected to perform a 1.5-meter drop test on 6 sides*. After 6 drops, the product still needs to pass a waterproof test to ensure that the function of the tested product is not in any way hindered, and it must have no cracks or damage.

*The drop height for a flashlight is 1.5 meters, and for a headlamp 2 meters.

In order to verify the high and low-temperature resistance of the product structure, 5 samples will be randomly selected and placed in a humidity cabinet for half an hour at -35°C, then it will be quickly transferred to an oven for half an hour at 70°C. This operation will be repeated 5 times. No damage to or deformation of the appearance and structure of the product must be visible for it to pass the test.

In order to verify the waterproof performance of a product, 10 samples will be randomly selected and subjected to a drop test after being immersed in 2 meters of water for 30 minutes. After the test, the product is continuously immersed in 2 meters of water for 4 hours. Before and after the test the product must function normally and no water seepage must be evident for it to pass the waterproof test.

In order to verify the service life of product switches, 3 samples will be randomly selected of which the switches will be clicked for a total of 10,000 times. After the test, the product must function normally, with good hand feeling and sensitivity, and a normal clicking of 2 times per second qualifies it to pass this test.

LIGHTING FOR EXTREMES

The ultimate pursuit of technological innovation

Fenix always pursues advanced industry technology and constantly creates innovative lighting products. So far, we have hundreds of technology patents that are widely used in various lighting products, from a mini keychain flashlight to a sturdy headlamp, which can all confirm Fenix's firm footsteps in exploration and innovation.



INNOVATIVE APF TECHNOLOGY SYSTEM MAKES SUPER TACTICAL FLASHLIGHT


Fenix's innovatively developed APF Technology System* uses a single layer to achieve simultaneous transmission of working current and signals control, completely breaking the shackles of the tactical flashlight by the tail switch, while still achieving the tactical requirements and applications for flashlights. such as small size, high brightness, and anti-interference.

Utility Model Patent ZL 201920500579.6

The brightness is no longer limited by the current withstand capability of the tactical switch, easily reaching or even exceeding 3000 lumens, giving full play to the advantages of LEDs.

er light size and more battery

The single-layer body and single-polarity battery are used to complete current transmission and signal control, making smaller light sizes and more battery use possibilities.

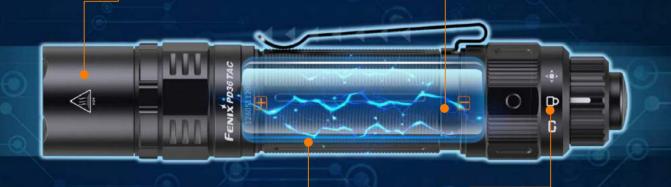

Complex external environments such as strong magnetic fields are easily dealt with through stronger anti-interference ability, so the flashlight can be used with confidence.

Through the pulse-frequency transmission system, it can make the multi-switch and multifunction combination of tactical operation and output selection can be achieved.

^{*} The APF (Advanced Pulse-frequency Transmission System) was developed by Fenix Laboratory for producing better flashlights. This has allowed the abandonment of the traditional development by breaking through the technology bottleneck, allowing the flashlight with a tail switch to achieve a higher

UOL- ULTRA-THIN OPTICAL LENS

Fenix's first 3.5mm UOL (Ultra-thin Optical Lens), adding an aluminum-silicon reflective coating to the unique lens structure, to accomplish the reflection and double refraction of the light emitted by the light source. This design makes a slimmer lens possible.

In addition, compared with the conventional 10mm lens, the UOL can produce better light efficiency and successfully reduce the volume and weight of the flashlight, while making the flashlight more portable and convenient to use.

Utility Model Patent ZL 201820183805.8

FARTHER



With the same thickness, the ultra-thin optical lens has an 86% increase in beam distance when compared with conventional lenses.

THINNER



bu /c

With the same beam distance, the thickness of the ultra-thin optical lens is about 60% thinner than the conventional lens.



03

IOP - INTELLIGENT OVERHEAT PROTECTION

LED flashlights mostly use high-power LED light-emitting bodies with batteries. In order to meet lighting needs, they often use high-power constant circuit output to supply power. However, due to the small size of the flashlight, long-term high-power lighting will cause the flashlight to become very hot, resulting in the risk of burns.

To overcome this problem, Fenix has created the IOP (Intelligent Overheat Protection). This system applies an integrated circuit system that limits the maximum current input and controls the real-time temperature, which allows the flashlight to automatically reduce its power when the temperature is too high, and to achieve intelligent cooling, thereby protecting the user, reducing safety risks, and relatively extending the runtime for longer lighting*.

Utility Model Patent ZL 201821879647.6

Not burning if less than 60°C

When the surface of the flashlight reaches the warning temperature before 60°C, the IOP will be activated to ensure that the surface of the flashlight will not exceed 60°C, and there will be no obvious feeling of hotness.

Sensitive and self-control

Without intervention, after the surface temperature of the flashlight decreases, the power and brightness will be automatically restored.



04

SPORT SECURE PERFORMANCE FOR OUTDOOR RUNNING AND TRAIL HEADBAND FIT SYSTEM

Headlamps are essential outdoor gear. In addition to brightness, runtime and waterproofness, simple and quick adjustment of the headband is also a primary concern for most users. The traditional headband uses a buckle to adjust the length, and it is extremely inconvenient to use as both hands are needed to adjust the headband.

Fenix has now broken the limitation of conventional headband adjustment by applying the SPORT Fit System to the headband adjustment, which has been the perfect solution to this problem. The SPORT Headband Fit System is fitted with a button structure. The length of the headband can be adjusted by rotating the button to tighten/loosen the pulling rope fixed on the headband, which provides convenient and flexible adjustment of the headband with a single hand while being active.

Utility Model Patent ZL 201922003670.X

One-handed adjustment while running

During trail running, the headband will inevitably loosen and fall due to bumpy and changing road conditions, resulting in changes in lighting angles, so the original intention of the single-handed design is to effectively ensure the runners' stride and safety, thus making sure every second counts and every step comforts.

Press and rotate

Just push and rotate the button to adjust the length of the headband. The New SPORT Headband Fit System couldn't be more perfect to adjust the headband with a single hand while running.







Fenix EDC (Everyday Carry) series products are deeply loved by thousands of users for the compact size, stylish appearance, applicable brightness, and practical functionality. In addition, the excellent resistance to water and impact make the EDC light the indispensable helper in everyone's daily lighting.


| Recommend: | |
|------------|----------|
| Flashlight | E Series |

Fenix outdoor series are professional lighting tools specialized for a variety of outdoor environments. Its ingenious design, excellent performance and high reliability in both water and drop tests mean that you won't have to worry when using our lights, as you can trust Fenix to safely light your way through the darkness.

| Recommend: | | |
|-----------------|----------------------|--|
| Flashlight | LD Series, PD Series | |
| Headlamp | HL Series, HM Series | |
| Bicycle Light | BC Series | |
| Camping Lantern | CL Series | |

Fenix Tactical series upholds the design concept of toughness, reliability and professionality. This series enters with high performance and extended reach. Fenix tactical products are widely used and recognized by major national departments such as the Switzerland Military Department, the Netherlands Police, the Saudi Arabia Border Defense, and the Queensland Police of Australia, etc.

| Recommend: | |
|----------------|----------------------|
| Flashlight | PD Series, TK Series |
| Tactical Light | GL Series |

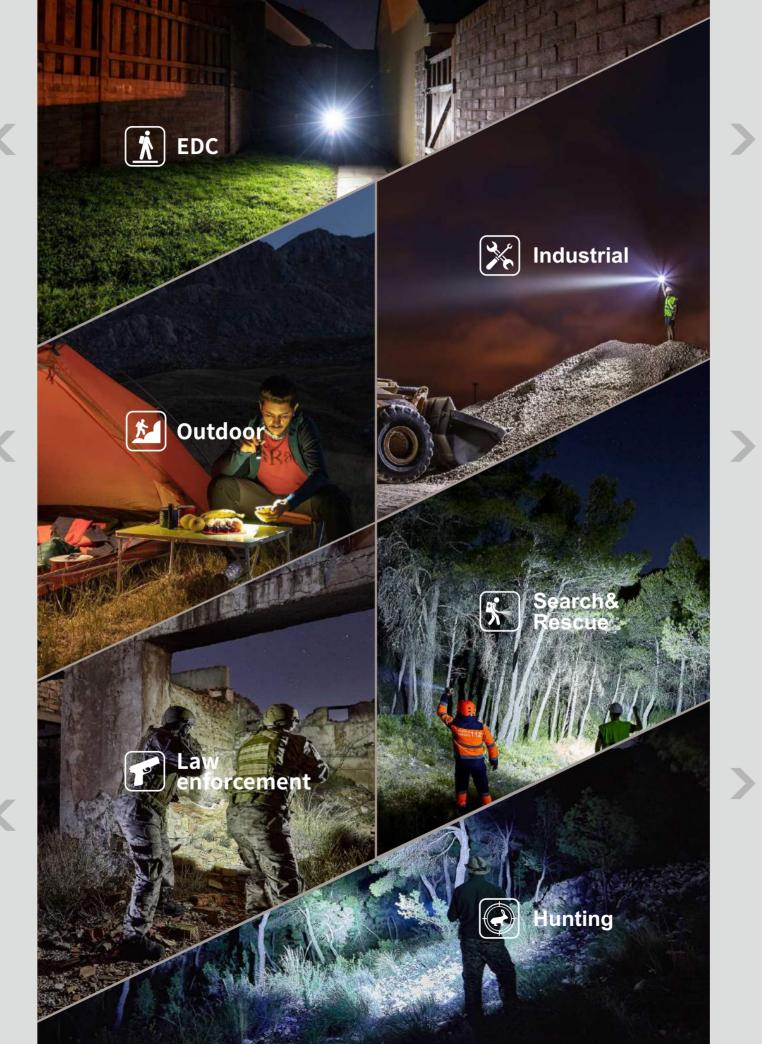

Fenix industrial lighting products are mobile lighting tools specially designed for industrial applications. Simple operation plus reliable performance have kinds of tasks handled quickly and efficiently. Fenix industrial products are now widely used and recognized by not only ordinary workers but also professional institutes such as petroleum companies and fire departments.

| Recommend: | | |
|------------|---------------------------------|--|
| Flashlight | WF Series, WT Series | |
| Headlamp | HM Series, HP Series, WH Series | |

Fenix searching & rescuing series combines outstanding performance with a user-friendly design. Its ultrahigh output and far-reaching beam distance provide excellent lighting support for searching and rescuing activities, plus reliable design of water, dust and impact resistance. This tough series must be an irreplaceable lighting tool for outdoor searching and rescuing.

| Recommend: | |
|------------|-----------|
| Flashlight | LR Series |
| Headlamp | HP Series |

Fenix hunting series features high output, optimal beam distance and reliable performance. In addition, multicolored light sources and sufficient accessories make this series the indispensable helper in night hunting, prey tracking and equipment inspection.

| Recommend: | |
|----------------|----------------------|
| Flashlight | HT Series, TK Series |
| Tactical Light | GL Series |
| Headlamp | HM Series |
| | |



| GL Series (Professional Tactical Lights) | ? | 66 |
|--|----------|----|
| | | |

| | HEADLAMPS | |
|---|---|-----|
| | HL Series (Lightweight Outdoor Headlamps) | 70 |
| | HM Series (All-metal High-performance Integrated Headlamps) | 76 |
| | HP Series (High-performance Separated Headlamps) | 85 |
| | WH Series (High-performance Industrial Headlamps) | 89 |
| | | |
| | BICYCLE LIGHTS | |
| | BC Series (High-performance Integrated Bicycle Lights) | 91 |
| | | |
| | CAMPING LANTERNS | |
| | CL Series (High-performance Camping Lanterns) | 99 |
| | | |
| | | |
| | ACCESSORIES | 103 |
| I | ACCESSORIES COMPATIBILITY GUIDE | 113 |
| | FENIX PRODUCTS SPECIFICATION CHART | 117 |
| | CUSTOMER SERVICE | 121 |

^{*}There may be some differences between the upcoming product and its finally listed version.

FLASHLIGHTS

Fenix flashlights are specifically designed for all kinds of harsh environments. All flashlight products fully embody toughness; reliability, and user-friendliness. Fenix makes a flashlight that can fit any need, whether it is tactical law enforcement, industrial operations, searching and rescuing or outdoor hiking. Excellent ability to withstand harsh conditions, easy to use, and comfortable grip, all of which make Fenix flashlights stand out from our competitors.


E Series

Fenix EDC (Everyday Carry) series products are deeply loved by thousands of users for the compact size, stylish appearance, applicable brightness, and practical functionality. In addition, the excellent resistance to water and impact make the EDC light the indispensable helper in everyone's daily lighting.





| ~#~ | IP68 |
|-----|-------|
| | 1xAAA |



- Ultra-compact size for everyday carry.
- One-handed operation with the rotating switch.
- All-metal CNC machining light body.
- Two colors for option.


SIZE: 2.62" x 0.59" x 0.55" / 66.5 x 15 x 14 mm WEIGHT: 0.46 oz / 13 g (excluding battery)



| | Black | |
|---|-------|--|
| F | | |

E02R RECHARGEABLE MINI KEYCHAIN FLASHLIGHT

IP68 120mAh



The Fenix E02R is a USB rechargeable keychain flashlight. This incredibly small, mini flashlight is powered by the built-in rechargeable Li-polymer battery. A reliable twisty head activates the two brightness levels. Twist the head to access the Micro USB charging port. Made of quality aluminum, completely dustproof and waterproof, this keychain flashlight is perfect for everyday carry.

- Micro USB rechargeable.
- Twisty head for on/off and brightness selection.
- Integrated design of light head and tail.
- Three optional colors for free choice.

SIZE: 1.89" x 0.59" x 0.55" / 48 x 15 x 14 mm | WEIGHT: 0.53 oz / 15 grams (including battery)






Twisty light head for fast choice Integrated design of light head of brightness levels.











- White and red lights.
- USB Type-C rechargeable.
- All-metal CNC machining light body.
- Recessed switch and lockout function.

SIZE: 1.85" x 0.94" x 0.47" / 47 x 24 x 12 mm WEIGHT: 0.78 oz / 22 g (including battery)

| E. A. T. | | Hox |
|--|------|------|
| | File | IP66 |

200mAh

| | High | Med | | | Red Light | Red Flash |
|---------|------------|-------------------|-----------|----------|--------------------|-----------|
| OUTPUT | 260 lumens | 80 lumens | 30 lumens | 5 lumens | 4 lumens | 4 lumens |
| RUNTIME | 45 minutes | 1 hour 15 minutes | 3 hours | 18 hours | 5 hours 30 minutes | 1 |



RECHARGEABLE MINI **KEYCHAIN FLASHLIGHT**

IP68 320mAh



400 lumens

64 meters

30 hours




- Instant Burst.
- Hidden micro USB charging port.
- All-metal CNC precision processing.

SIZE: 2.68" x 0.60" x 0.59" / 68 x 15.3 x 15 mm WEIGHT: 0.85 oz / 24 g (including battery)



Unique Instant Burst.

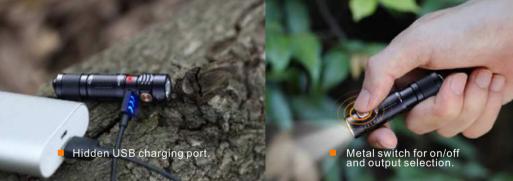

RECHARGEABLE MINI HIGH-OUTPUT FLASHLIGHT


| r y r | IP68 |
|--------------|--------|
| | 800mAh |



600 lumens

124 meters

70 hours



- Hidden USB Type-C charging port.
- All-metal CNC precision processing.
- Ultra-compact size for convenient carrying everyday.



| **SIZE:** 3.11" x 0.76" x 0.72" / 79 x 19.3 x 18.4 mm | WEIGHT: 1.59 oz / 45 g (including battery)

BRAND-NEW EDC

FLASHLIGHTS

The Fenix E05R and E09R are rechargeable EDC flashlights with instant Burst mode. Their charging

interface is hidden in the light body, the innovative design ensures the charging function while

maintaining the overall beauty of the flashlights,

avoiding the separation of the light head and body, and ensuring dustproof and waterproof ability.



| ~#~ | IP68 |
|-----|------|
| | 1xAA |



160 lumens



68 meters



70 hours

- Automobile ultrathin optical lens coating process.
- No standby current, safe and cost-efficient.
- One-handed operation with the single tail
- Two-position body clip and tail standing capability for varying conditions.

| **SIZE:** 3.06" x 0.75" x 0.69" / 77.6 x 19 x 17.6 mm WEIGHT: 0.96 oz / 27.3 g (excluding battery)

E18R V2.0 HIGH-PERFORMANCE EDC FLASHLIGHT

IP68 1x16340



- Max 1200 lumens output.
- USB Type-C fast charging.
- Two-position body clip for convenient carry.
- Magnetic tail eliminates hand fatigue.

| **SIZE**: 2.64" x 0.87" x 0.87" / 67 x 22 x 22 mm







Powered by ARB-L16-700P battery.

Two-position body clip for














350 lumens



126 meters



200 hours



- One-handed operation with the tail switch.
- Digitally regulated circuit for maintaining a stable output.
- Intelligent overheat protection and reverse polarity protection.

| m | IP68 |
|---|-------|
| • | 11 00 |

2xAA

FENTX E20

SIZE: 5.00" x 0.83" x 0.66" / 127 x 21 x 16.8 mm | WEIGHT: 1.48 oz / 42 g (excluding battery)

Utility Model Patent ZL 201820183805.8



RECHARGEABLE EDC FLASHLIGHT

compact for EDC carry, it will likely become part of your favorite everyday carry gear.

The Fenix E28R is a rechargeable EDC flashlight that is long-awaited by EDC lovers. This E28R is fully rechargeable via its USB Type-C charging port with included charging cable; and features inner waterproofing treatment. The flashlight keeps extremely









- Max 1500 lumens output and 200 meters beam distance.
- USB Type-C fast charging, inner waterproofing treatment.
- Ultrathin optical lens for soft and balanced beam.
- Boot-up battery level indication and low-voltage warning.

SIZE: 4.29" x 1.04" x 0.89" / 109 x 26.5 x 22.6 mm | WEIGHT: 2.33 oz / 66 g (excluding battery)



| ~ J ~ | IP68 |
|--------------|------------------|
| | 1x18650/2xCR123A |

| | Turbo | High | Med | Low | Eco | Strobe |
|---------|-------------------|--------------------|------------|---------------------|---------------------|-------------|
| OUTPUT | 1500 lumens | 800 lumens | 350 lumens | 150 lumens | 30 lumens | 1500 lumens |
| RUNTIME | 2 hours 5 minutes | 2 hours 30 minutes | 6 hours | 17 hours 15 minutes | 73 hours 35 minutes | 1 |

E30R COMPACT HIGH-PERFORMANCE RECHARGEABLE FLASHLIGHT

| M | IP68 | | |
|---|------------------|--|--|
| | 1x18650/2xCR123A | | |

1600 lumens

203 meters

70.5 hours





Outdoor Industry Award 2019

- Max 1600 lumens output and 203 meters beam distance.
- Magnetic charging with included magnetic charging cable 3 hours for fully charging.
- Three ways of lockout function to avoid accidental activation.
- Intelligent overheat protection against high surface temperature.

SIZE: 3.90" x 1.00" x 0.85" / 99 x 25.4 x 21.5 mm WEIGHT: 1.80 oz /51 g (excluding battery)







Small body with high output.





SUPER HIGH-PERFORMANC **EDC FLASHLIGHT**

The 2020 Edition of the Fenix E35 V3.0 packs a big breakthrough. Only measuring 4.65 inches, this EDC light will quickly be on your favorite flashlight list with its compact size and easy operation. E35 V3.0 has made a name for itself for being a reliable and straightforward lighting tool as one of the best Everyday Carry Flashlights around; for daily use, city commuting or, outdoor lighting.











- Max 3000 lumens output and 240 meters beam distance.
- Classical design with pocket size.
- Ultra-thin optical lens for soft and balanced beam.
- Boot-up battery level indication and low-voltage warning.

SIZE: 4.65" WEIGHT: 2.

| *10, |
|------|
| |

| | 1500 |
|---|----------|
| 5" x 1.04" x 1.04" / 118 x 26.5 x 26.5 mm | 1x2170 |
| 2.36 oz / 67 g (excluding battery) | |
| | |
| | |

| | Turbo | High | Med | Low | Eco | Strobe |
|---------|-------------------|--------------------|------------|------------|-----------|-------------|
| OUTPUT | 3000 lumens | 1200 lumens | 450 lumens | 150 lumens | 50 lumens | 3000 lumens |
| RUNTIME | 1 hour 15 minutes | 2 hours 40 minutes | 7 hours | 20 hours | 50 hours | 1 |

MULTIPURPOSE POWER BANK FLASHLIGHT

IP68 5000mAh



SIZE: 5.43" x 1.08" x 1.08" / 138 x 27.5 x 27.5 mm WEIGHT: 6.00 oz / 170 g (including battery)

Fenix E-CP is a rechargeable outdoor flashlight with a power bank function. It has a built-in 5000mAh large-capacity battery to ensure longer runtime, and it can be used as a power bank for charging small digital products such as mobile phones. Featuring IP68 protection, it can be used in harsh outdoor environments.



| IP66 |
|--------|
| 275mAh |



The Fenix E-LITE is a multipurpose super mini light that can be clipped on a hat, pocket, backpack or bicycle tail, or worn on your waist or chest. It has two lights: one on top which provides three brightness levels from 5 to 150 lumens for daily lighting needs, and another in front that provides eye-catching red and blue lights for signal transmission in emergency conditions. Additionally, it is fitted with a Type-C charging interface.

- Multipurpose EDC and signal light for a variety of situations.
- Mini size and ultralight weight.
- Red and blue signal and warning lights.
- USB Type-C charging.

SIZE: 2.05" x 0.91" x 0.79" / 52 x 23 x 20 mm WEIGHT: 0.63 oz / 18 g (including battery)








Be clipped on a hat.

Be hung on the backpack.

Red and blue warning

E-SPARK EMERGENCY CHARGING AND DISCHARGING KEYCHAIN FLASHLIGHT

| IPX4 |
|--------|
| 800mAh |



- Compact for easy carry.
- USB Type-C charging and discharging.
- Red light flash function for emergency cases
- Unique body design and color.


SIZE: 3.43" x 1.50" x 0.31" / 87 x 38 x 8 mm WEIGHT: 1.34 oz / 38 g (including battery)



Fenix E-SPARK is an emergency keychain flashlight with charging and discharging functions. Built-in 800mAh highcapacity battery to ensure ultra-long runtime, with Type-C dual interface for charging and discharging, which can be used for emergency charging of mobile phones. It also has a red flashing warning function which can be used as a signal light.

E-STAR PORTABLE SELF-POWERED EMERGENCY FLASHLIGHT

IP24 1300mAh/1xAA



- Single-handed power generation.
- Built-in super capacitor, light can be used even if without battery, no need to constantly press the handle.
- Made of ABS engineering plastics, in line with ergonomic industrial design.
- Supports USB Type-C charging, easily be charged by external devices.

SIZE: 5.31" x 2.09" x 0.94" / 135 x 53 x 24 mm WEIGHT: 4.52 oz / 128 g (including battery)



The Fenix E-star is a portable self-powered flashlight for emergencies, including areas lacking stable power supply and disaster-hit areas; as PSK/BOB gear, also it can be used as a backup flashlight for extended outdoor activities.






PEN-SHAPED WORK LIGHT

LD02 V2.0 DUAL LIGHT SOURCES EDC PENLIGHT


| ~ J | IP68 |
|------------|-------|
| | 1xAAA |





LD05 DUAL LIGHTING SOURCES WORKING PENLIGHT


| ~ J | IP68 |
|------------|-------|
| | 2γΔΔΔ |





LD15R USB RECHARGEABLE FLASHLIGHT

IP68 1x16340/1xCR123A



- Max 500 lumens output and 85 meters beam distance.
- White and red light sources.
- Two-way body clip and magnetic tail.

SIZE: 2.76" x 0.75" x 0.75" / 70 x 19 x 19 mm WEIGHT: 1.41 oz / 40 g (excluding battery)








Micro USB charging

Magnetic tail



LD22 MULTIFUNCTIONAL OUTDOOR FLASHLIGHT

| .h . | IP68 |
|-------------|----------------------|
| | 1100mAh/2xAA/2x14500 |



- Powered by a 1100mAh rechargeable Li-ion battery pack, compatible with AA and 14500 batteries.
- Dual body clip for easy carry.
- Instant on with the tactical tail switch and output selection with the side switch.

SIZE: 5.83" x 0.85" x 0.71" / 148 x 21.5 x 18 mm WEIGHT: 3.42 oz / 97 g (including battery)



Fenix LD22 V2.0 is a multifunctional outdoor flashlight that includes a 1100mAh rechargeable Li-ion battery pack and it is compatible with easy-to-access AA batteries. Tactical tail switch and side switch combination operation, dual body clip make it easy to operate and easy to carry.

LD30

COMPACT HIGH-PERFORMANCE OUTDOOR FLASHLIGHT

The Fenix LD30 is an ultra-compact outdoor flashlight with a tactical tail switch. Operated on a single 18650 rechargeable Li-ion battery (included), the flashlight emits five output levels that suit various scenes application, and 2 coldresistant CR123A Lithium batteries can be used for emergencies as well. Additional features include a two-position body clip and battery level indicator, which enhance daily usage in outdoor activities and industrial tasks.









- Max 1600 lumens output and 205 meters beam distance.
- Ultra-thin optical lens with coating process.
- Instant activation with the tactical tail switch; output selection with the side switch.
- Two-position body clip.



SIZE: 4.29" x 1.0" x 0.85" / 109 x 25.4 x 21.5 mm

WEIGHT: 2.08 oz / 59 g (excluding battery)

| | Turbo | High | Med | Low | Eco | Strobe | sos |
|---------|-------------------|-------------------|--------------------|---------------------|-----------|-------------|-----------|
| OUTPUT | 1600 lumens | 800 lumens | 350 lumens | 150 lumens | 30 lumens | 1600 lumens | 30 lumens |
| RUNTIME | 1 hour 25 minutes | 1 hour 50 minutes | 5 hours 20 minutes | 17 hours 10 minutes | 70 hours | 1 | / |



PD25R PORTABLE RECHARGEABLE FLASHLIGHT

| ~¥~ | IP68 |
|-----|------------------|
| | 1x16340/1xCR123A |





268 meters



60 hours

- Max 800 lumens output and 268 meters
- Hidden USB Type-C charging port.
- Included two-position body clip.
- Instant on with the tactical tail switch and output selection with the side switch.

SIZE: 3.62" x 0.94" x 0.94 / 92 x 24 x 24 mm WEIGHT: 2.75 oz / 78 g (including battery)



The Fenix PD25R flashlight is a portable flashlight with a hidden Type-C charging port. The PD25R blasts an amazing 800 lumens a total distance of 268 meters. The PD25R is powered by a single 16340 rechargeable Li-ion battery (included) or can operate on a disposable CR123A Lithium battery. Compact and built-tough with an IP68 dustproof and waterproof rating, this flashlight is perfect for just about any outdoor or work activity.



PD32 V2.0 ALL-ROUND COMPACT FLASHLIGHT

| ~\$~ | IP68 |
|------|------------------|
| | 1x18650/2xCR123A |



The upgraded Fenix PD32 V2.0 LED flashlight is an all-around flashlight with a compact body. Tap and hold the multifunctional tail switch for a fast momentary on and press the tail switch to access the different modes with a single hand. The PD32 V2.0 LED flashlight is perfect for hiking, camping and outdoor activities and is powerful enough for law enforcement, search and rescue.

- Max 1200 lumens output and 395 meters beam distance.
- Multifunctional tail switch.
- Instant activation and strobe.
- Compact structure, perfect pocket size.



WEIGHT: 2.89 oz / 82 g (excluding battery)


















- New long-distance LED.
- Pocket size for easy carry.
- Boot-up battery level indication and low-voltage warning.
- Instant activation with the tactical tail switch and output selection with the side switch.

SIZE: 5.28" x 1.00" x 0.90" / 134 x 25.4 x 22.8 mm WEIGHT: 2.95 oz / 83.5 g (excluding battery)


| *** | IP68 |
|-----|------------------|
| | 1x18650/2xCR123A |

| | Turbo | High | Med | Low | Eco | Strobe |
|---------|-------------------|--------------------|--------------------|---------------------|-----------|-------------|
| OUTPUT | 1700 lumens | 600 lumens | 150 lumens | 50 lumens | 5 lumens | 1700 lumens |
| RUNTIME | 1 hour 25 minutes | 2 hours 35 minutes | 8 hours 30 minutes | 26 hours 25 minutes | 230 hours | / |



PD36R MULTIFUNCTIONAL RECHARGE-ABLE FLASHLIGHT

| - T | IP68 |
|------------|---------|
| | 1x21700 |



- Max 1600 lumens output and 283 meters beam distance.
- 4-hour fast charging with 5V/3A USB Type-C charging port.
- Instant activation with momentary tactical tail switch; output selection with the side switch.
- Two-position body clip for different lighting demands.



SIZE: 5.35" x 1.04" x 1.0" / 136 x 26.4 x 25.4 mm | WEIGHT: 3.0 oz / 85 g (excluding battery)

The PD36R is an ultra-compact flashlight with a powerful USB Type-C charging port. Driven by a long-lasting 21700/5000mAh rechargeable Li-ion battery, the light emits a max output of 1600 lumens and 283 meters. Dual switches control five output levels and strobe for easy and fast operation. Additional features include battery level indicator, smart output memory and two-position body clip, all of which enhance daily usage in outdoor activities and tactical applications.








PD36 TAC MECHANICAL TACTICAL FLASHLIGHT

1x21700



- Max 3000 lumens output and 274 meters beam distance.
- Powered by a single 21700 rechargeable Li-ion battery.
- Tactical and duty modes for different
- Dual-function tactical switch to accurately activate the tactical function.



odel Patent ZL 201920500579.6

The Fenix PD36 TAC flashlight is a mechanical flashlight that remains pocket-size but focuses on tactical employment. The PD36 TAC features a dual-function tactical switch which enhances its tactical capabilities. The Tactical Mode strengthens the PD36TAC with a faster operation and simplified selection of high and instant strobe. Switch to the Duty Mode, the PD36 TAC delivers 6 output modes including a strobe.







PD40R 1/2.0 **MECHANICAL ROTARY SWITCHING FLASHLIGHT**

The Fenix PD40R V2.0 is a portable flashlight with a USB Type-C charging interface. It achieves precise output selection through the unique mechanical rotary switch. With the included 5000mAh/21700 battery and the USB Type-C charging interface, the runtime will never bother anyway. You must be surprised at what the light offers for outdoor activities and emergency situations.







Powerful 3000 lumens maximum output in a small body.



Instant activation with the mechanical rotary switch.



Second-generation mechanical ring, the rotary switch combats high-intensity magnetic interference.

Uses a 21700 battery and supports USB Type-C fast charging.





- Max 3000 lumens output and 405 meters beam distance.
- Patented technique of rotary mode selection switching for accurate operation.
- Inner waterproof USB Type-C charging port.
- Boot-up battery level indication and lowvoltage warning.

SIZE: 5.43" x 1.31" x 1.02" / 138 x 33.2 x 26 mm WEIGHT: 4.13 oz / 117 g (excluding battery)




| IP68 |
|---------|
| 1x21700 |
| |

Utility Model Patent ZL 201821227065.X

| | Turbo | High | Med | Low | Strobe |
|---------|--------------------|--------------------|--------------------|---------------------|-------------|
| OUTPUT | 3000 lumens | 1000 lumens | 350 lumens | 30 lumens | 2500 lumens |
| RUNTIME | 2 hours 40 minutes | 3 hours 10 minutes | 8 hours 30 minutes | 88 hours 10 minutes | 1 |

UC35 V2.0 USB RECHARGEABLE TACTICAL FLASHLIGHT


| ~~ | IP68 |
|----|---------|
| | 1x18650 |




- Max 1000 lumens output and 266 meters beam distance.
- Micro USB rechargeable.
- Boot-up battery level indication.
- Instant activation with the tactical tail switch and output selection with the side switch.


SIZE: 5.51" x 1.00" x 0.92" / 140 x 25.4 x 23.5 mm WEIGHT: 3.13 oz / 89 g (excluding battery)

Utility Model Patent ZL 201721611084.8

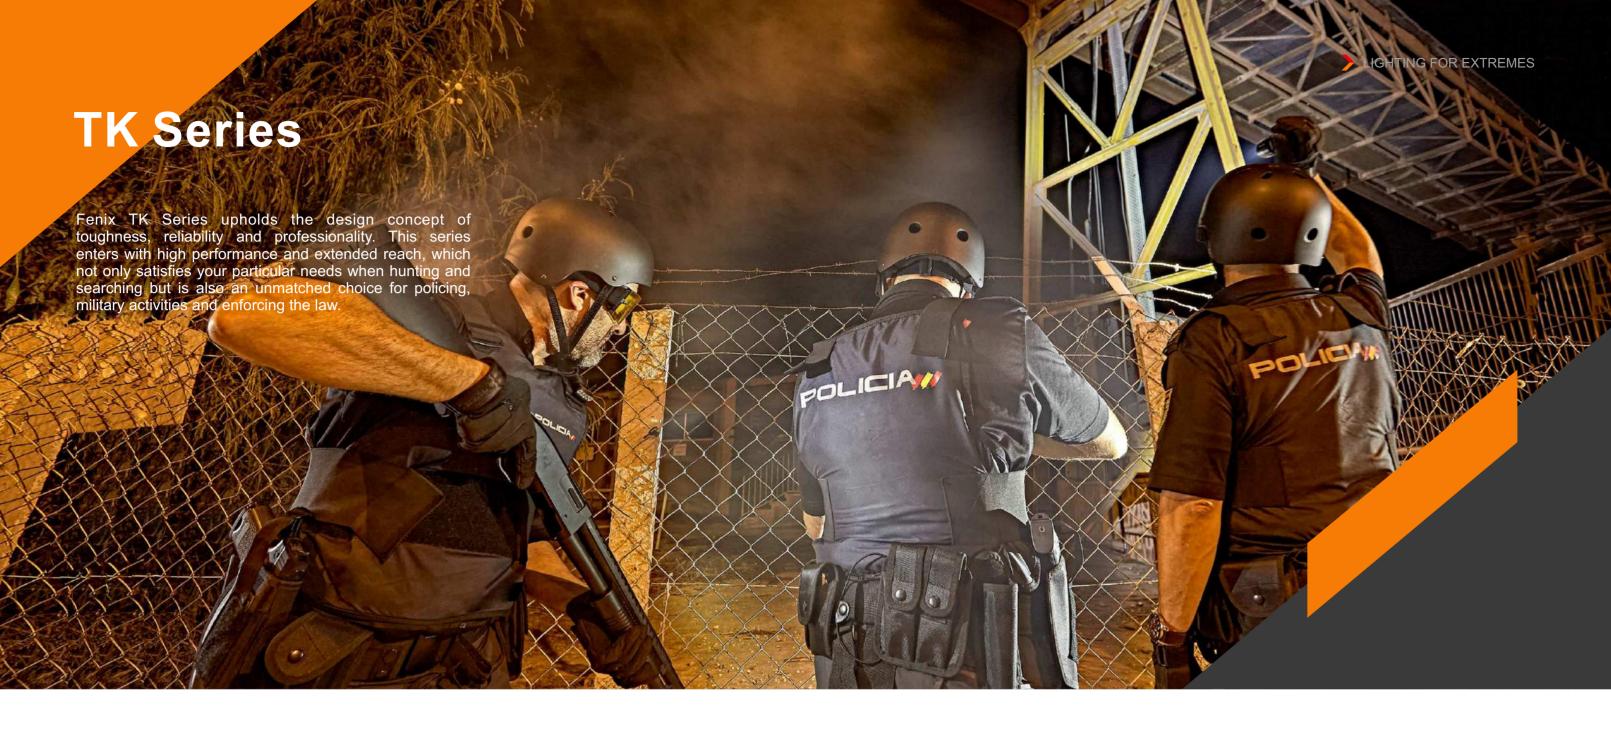

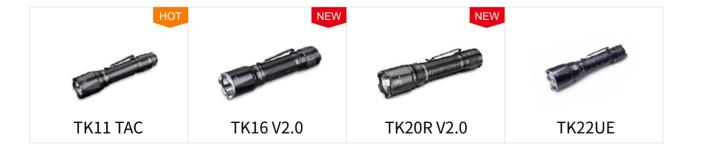



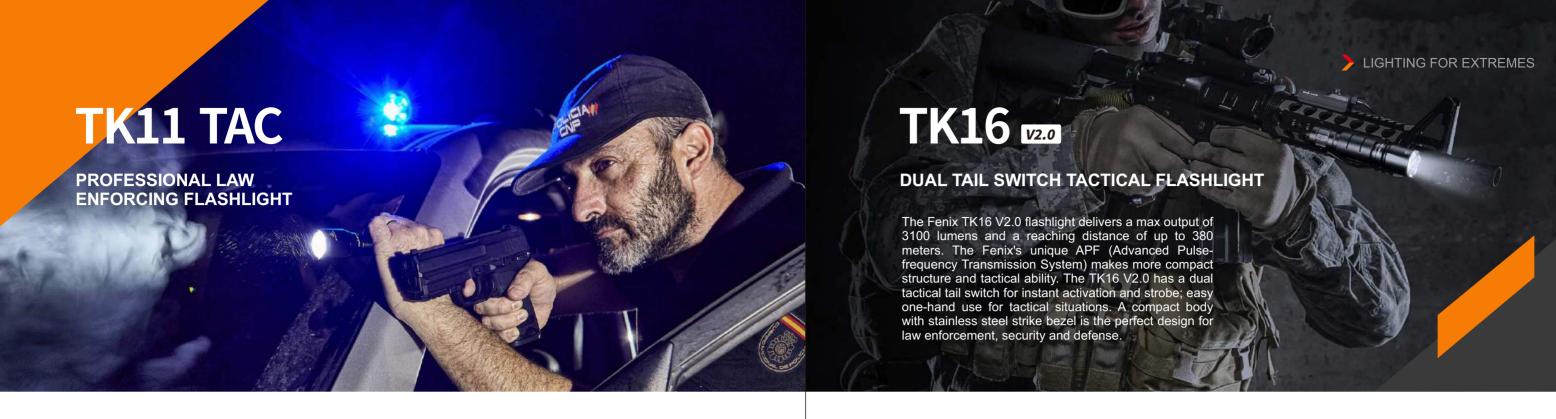

The Fenix TK11 TAC (Tactical Edition) LED flashlight, remains in pocket-size form but surpasses in performance and tactical deployment. Designed with the military and law enforcement professionals in mind, The TK11 TAC features Tactical mode and Duty mode. The Fenix's unique APF (Advanced Pulse-frequency Transmission System) makes a more compact structure and stronger anti-interference ability. Perfect for professional use, security and law enforcement, you can count on the TK11 TAC to deliver reliable, powerful lighting for a wide range of situations.






Tactical mode







tility Model Patent 201920500579.6



- Max 3100 lumens output.
- Advanced Pulse-Frequency Transmission System (APF).
- Instant activation and strobe with the tactical switch.
- Compact structure with a single-layer body.

| SIZE: 5.63" x 1.34" x 1.00" / 143 x 34 x 25.4 mm | WEIGHT: 3.95 oz / 112 g (excluding battery)



| | Turbo | High | Med | Low | Eco | Strobe |
|---------|--------------------|--------------------|--------------------|---------------------|---------------------|-------------|
| OUTPUT | 3100 lumens | 1000 lumens | 350 lumens | 150 lumens | 30 lumens | 3100 lumens |
| RUNTIME | 2 hours 40 minutes | 2 hours 50 minutes | 8 hours 20 minutes | 19 hours 10 minutes | 43 hours 20 minutes | 1 |

TK20R RECHARGEABLE DUAL TAIL SWITCH TACTICAL FLASHLIGHT

IP68 1x21700

3000 lumens

370 meters

43.3 hours

Max 3000 lumens output and 370 meters beam distance.

- Dual tactical tail switch.
- Hidden USB Type-C charging port.
- Included 5000mAh/21700 largecapacity battery.

Utility Model Patent 201920500579.6

SIZE: 6.02" x 1.34" x 1.00" / 153 x 34 x 25.4 mm WEIGHT: 7.2 oz / 204 g (including battery)



The Fenix TK20R V2.0 flashlight delivers functionality and performance, authorizing it as a reliable and necessary tool for emergency and tactical applications. The Fenix's unique APF (Advanced Pulse-frequency Transmission System) makes more compact structure and tactical ability. The TK20R V2.0 has a dual tactical tail switch for instant activation and strobe; easy one-hand use for tactical situations, is the perfect design for law enforcement, security and defense.

TK22UE PORTABLE TACTICAL FLASHLIGHT WITH HIGH PERFORMANCE

| ~ t ~ | IP68 |
|--------------|-----------------|
| | 1x21700/1x18650 |



- Max 1600 lumens output and 405 meters beam distance.
- Stainless steel strike bezel inlaid 3 tungsten steel breaking tips.
- Instant activation with the tactical tail switch and output selection with the side switch.
- Made of A6061-T6 aluminum

SIZE: 5.91" x 1.57" x 1.02" / 150 x 40 x 26 mm WEIGHT: 5.19 oz / 147g (excluding battery)



TK26R TRI-COLORED TACTICAL LAW-ENFORCING FLASHLIGHT

| ~fr | IP68 |
|-----|------------------|
| | 1x18650/2xCR123A |



100 hours

- Max 1500 lumens output and 350 meters beam distance.
- Red, white and green light sources.
- Instant strobe with the dual tail switch.
- USB Type-C charging.

SIZE: 5.91" x 1.57" x 1.00" / 150 x 40 x 25.4 mm WEIGHT: 5.54 oz /157 g (excluding battery)

TK28 TAC MILITARY AND DUTY FLASHLIGHT

| ~ J | IP68 |
|------------|---------|
| | 1x21700 |



- Max 3000 lumens output and 470 meters beam distance.
- Tactical and Duty modes for flexibly needed choice and operation.
- Patented dual-function tactical switch for instantly tactical activation.
- Lockout function avoids accidental activation.

Utility Model Patent 201920500579.6

| SIZE: 6.06" x 1.57" x 1.02" / 154 x 40 x 26 mm | WEIGHT: 5.50 oz / 156 g (excluding battery)



The Fenix TK28 TAC military flashlight stands out in performance and tactical deployment. Designed with the tactical and on-duty lighting needs in mind, The TK28 TAC features Tactical mode and Duty mode. In Duty Mode, the TK28 TAC delivers 5 output modes including a strobe. Switch to the Tactical Mode to operate for a fast, simplified selection of turbo and instant strobe. Perfect for professional use, security and law enforcement, you can count on the TK28 TAC to deliver reliable, powerful lighting for a variety of situations.

BRAND NEW WHITE LASER FLASHLIGHT

The Fenix white laser flashlights feature ultra-long-range beam, with the combination of the straight beam of white laser, the flashlights are suitable for precise tactical applications. The white laser light with extremely high density is processed by three layers of special transparent membrane, a highly concentrated and collimated. white light beam is formed.

TK35UE v2.0

HIGH-PERFORMANCE DUAL MODE TACTICAL FLASHLIGHT

The Fenix TK35 Ultimate Edition V2.0 Ver a high-performance flashlight with Tactica Duty modes. Powered by two 18650 bat the light delivers a maximum output of 5000 lumens with a far-reaching distance of 400 meters. The innovative mechanical toggle switch allows you to freely and rapidly switch between tactical, duty, and lockout modes. And the tactical tail switch instantly responds to your operation.



WHITE LASER TACTICAL FLASHLIGHT

| ~ h ~ | IP68 |
|--------------|---------|
| | 1x21700 |



- Max 500 lumens output and 1200 meters beam distance.
- White laser light source.
- Instant activation with tactical tail switch and output selection with the functional side switch.
- Boot-up battery level indication, low-voltage warning, and intelligent memory circuit.



SIZE: 6.22" x 1.26" x 1.02" / 158 x 32 x 26 mm WEIGHT: 5.15 oz / 146 g (excluding battery)

*Laser Classification: Class IIIb / Class 3B


The TK30 is a high-performance white laser tactical flashlight with a maximum range of 1200 meters and a white laser with a straight beam for precise tactics. The light comes with a 5000mAh large-capacity 21700 Li-ion battery that ensures ultralong runtime; and a tactical tail switch for instant activation. Featuring battery level indication, the remaining battery power can be read every time the light is turned on. TK30 is the best choice as a tactical partner.













The light can be powered by a single 18650 or two CR123A batteries in emergency situations.



Battery level indication and low voltage warning.



Instant strobe activation.

5000 lumens **400** meters 85 hours

- Patented toggle switch for the selection of tactical and outdoor modes.
- Max 5000 lumens output.
- Dual tactical tail switch
- Instant strobe.

SIZE: 5.63" x 1.69" x 1.69"/ 143 x 43 x 43 mm WEIGHT: 7.13 oz / 202 g (excluding battery)



Model Patent ZL 201721574627.3

| | TACTICAL MODE | | DUTY MODE | | | | | |
|---------|----------------------|-------------|----------------------|-------------|------------|------------------------|-----------|-------------|
| | Tactical | Strobe | Turbo | High | Med | Low | Eco | Strobe |
| OUTPUT | 3500lumens | 3500 lumens | 5000 lumens | 2000 lumens | 800 lumens | 350 lumens | 30 lumens | 3500 lumens |
| RUNTIME | 1 hour 50 minutes | 1 | 1 hour 40 minutes | 2 hours | 4 hours | 13 hours 40 minutes | 85 hours | 1 |



HT18 LONG-RANGE HUNTING FLASHLIGHT

| ~ J | IP68 |
|------------|-----------------|
| | 1x21700/1x18650 |



■ Included a Fenix ARB-L21-5000U USB rechargeable 21700 Li-ion battery.

momentary tactical tail switch.

SIZE: 7.24" x 2.68" x 1.02"/ 184 x 68 x 26 mm WEIGHT: 7.76 oz / 220 g (excluding battery)



HT30R RECHARGEABLE WHITE LASER TACTICAL FLASHLIGHT

| ~W~ | IP68 |
|-----|---------|
| | 1x21700 |



- Included a 5000mAh/21700 large-capacity battery.
- Advanced Pulse-frequency Transmission System.

Fenix HT30R is a white laser tactical flashlight with an ultra-long beam of 1500 meters. The light neck has a hidden Type-C charging interface, powered by a single 21700 high-capacity Li-ion battery. The dual tail switch activates instant on and strobe function. It can quickly respond to operations in military and law enforcement, personal hunting, emergency rescue, personal defense and other activities.



LR35R

POWERFUL MID-SIZE SEARCHING FLASHLIGHT

The Fenix LR35R is a super bright searching flashlight that blasts a max output of 10000 lumens and a max beam distance of 500 meters. This flashlight can be quickly charged with the two included 4000mAh Li-ion power batteries via the USB Type-C port. The amount of light that the Fenix LR35R flashlight emits is truly remarkable, a wide beam angle and strobe function are quite ideal for Search and Rescue. Extremely small for a flashlight with this much power, only 5.5" long plus a flat light body, this flashlight is the perfect tool for exploring and









10000 lumens

500 meters

80 hours



- Max 10,000 lumens output and 500 meters beam distance.
- Mid-size body for one-handed grip.
- USB Type-C charging port.
- Lockout function avoids accidental activation.

SIZE: 5.51" x 2.03" x 1.83" / 140 x 51.5 x 46.5 mm WEIGHT: 8.43 oz / 239 g (excluding battery)

| A. | IP68 |
|----|---------|
| | 2x21700 |

| | Turbo | High | Med | Low | | Strobe |
|---------|-------------------|-------------------|--------------------|--------------------|-----------|--------------|
| OUTPUT | 10000 lumens | 3000 lumens | 1200 lumens | 450 lumens | 50 lumens | 10000 lumens |
| RUNTIME | 1 hour 25 minutes | 1 hour 35 minutes | 3 hours 15 minutes | 8 hours 20 minutes | 80 hours | 1 |



Fenix LR series combines ultra-high performance with a user-friendly design. Its ultrahigh output and far-reaching beam distance provide excellent lighting support for searching and rescuing activities, plus reliable design of water, dust and impact resistance. This tough series must be an irreplaceable lighting tool for outdoor searching and rescuing.



LR35R









LR40R

LR50R

LR80R



The Fenix LR40R is a high-performance rechargeable ultra-compact searching flashlight that combines spot- and floodlight. Catering for numerous outdoor and extreme environments, this light is an indispensable helper in cave exploring, searching and rescuing, as well as acting as a backup light for drivers.







/1~4x18650



- Super high performance max 12000 lumens output and 773 meters beam distance.
- Spotlight and floodlight modes for different lighting demands.
- USB Type-C fast charging and USB discharging.
- Lockout function avoids accidental activation.

| **SIZE**: 6.06" x 3.15" x 2.01" / 154 x 80 x 51 mm | **WEIGHT**: 17.6 oz / 500 g (excluding battery)



LR50R

MULTIFUNCTIONAL SUPER BRIGHT SEARCHING FLASHLIGHT

The Fenix LR50R is a super bright flashlight made for search and rescue. The Fenix LR50R flashlight emits a truly remarkable output of 12000 lumens. Capable of 950-meter beam visibility, it can be used to find any object in the dark. Dual stainless steel side switches allow you to quickly activate and cycle through the general six brightness levels, and functional modes including instant turbo, strobe and SOS. With the included USB Type-C charging port you can fast charge the Fenix LR50R in a matter of hours, or use the discharge function to charge your other devices.









- Max 12000 lumens output and 950 lumens beam distance.
- Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting
- USB Type-C charging and discharging interface supports fast-charging protocols.
- Battery level indication for instant checking of remaining battery level.

| SIZE: 6.42" x 3.46" x 2.36" / 163 x 88 x 60 mm | WEIGHT: 34.8 oz / 986 g (including battery)



3.6V/16000mAh /1~4x21700



The Fenix LR80R is the definition of a super bright handheld searchlight. The flashlight will impress everyone with an outstanding 18000 lumens powered by the built-in 7.2V/12000mAh Li-ion power battery pack. Capable of 1130-meter beam visibility, it can be used to find any object in the dark. Dual switch design allows you to quickly enter high and low-brightness modes. With the built-in USB Type-C charging port you can fast charge the Fenix LR80R in a matter of hours, or use the discharge function to charge your other devices. A unique and user-friendly brightness downshifting sensor function is designed to avoid high temperatures at close-range lighting.









- High output, far-reaching beam shot, long-lasting runtime for wide-range searching lighting.
- High, low and flash modes for options.
- Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.

| **SIZE**: 10.20" x 4.25" x 2.13" / 259 x 108 x 54 mm | **WEIGHT**: 57.71 oz / 1636 g (including battery)







PROFESSIONAL EXPLOSION-PROOF FLASHLIGHTS


The Fenix explosion-proof flashlights are designed and manufactured in accordance with the international explosion-proof standard of IECEx system, which have passed the necessary tests and was certified by IECEx, ATEX and SGS. Thus these products can be safely used in explosive gas and dust atmospheres, users feel relieved when working in flammable and explosive places.






WF05E INTRINSICALLY SAFE FLASHLIGHT

| ~#~ | IP66/68 |
|-----|---------|
| | 2xAAA |





- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- Three output levels, max 85 lumens
- The body clip is made of explosion-proof anti-static plastic.

(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)










SIZE: 5.29" x 0.75" x 0.59" / 134.5 x 19 x 14.9 mm WEIGHT: 1.34 oz / 38 g (excluding batteries)

MAGNETIC INTRINSICALLY SAFE FLASHLIGHT

| ~ J | IP66/67 |
|------------|---------|
| | 3xAA |



- Intrinsically explosion-proof.
- Made of explosion-proof and antistatic plastics.
- Magnetic light tail and body clip.
- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.

(Can be safely used in Zone 0, Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 20, Zone 21 and Zone 22 as well)










SIZE: 6.59" x 1.93" x 0.94" / 167.5 x 49 x 24 mm WEIGHT: 5.64 oz / 160 g (excluding batteries)

WF30RE EXPLOSION-PROOF FLASHLIGHT



- Intrinsically safe explosion-proof flashlight.
- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- Specialized charger for convenient charging.

Orange-peel reflector for a soft



(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)







| SIZE: 5.93" x 1.34" x 1.10" / 150.5 x 34 x 28 mm | ~#~ | IP66/68 |
|--|-----|------------------|
| WEIGHT: 7.58 oz / 215 g (including battery) | | 1xARB-L21-2600Ex |

| | High | Med | Low | Strobe |
|---------|--------------------|---------------------|-----------|------------|
| OUTPUT | 280 lumens | 120 lumens | 30 lumens | 280 lumens |
| RUNTIME | 6 hours 50 minutes | 15 hours 40 minutes | 120 hours | 1 |



Fenix WF26R is a patrolling flashlight developed for industrial operations, with a brightness of up to 3000 lumens, which can easily cope with various complex environments. The charging cradle and the magnetic charging cable can be used separately, which is convenient for groups or personal carry-on. Dual tail switch, battery level indication, low-voltage warning, instant strobe, APF (Advanced Pulse-frequency Transmission System) features strong anti-interference ability and is very suitable for on-site inspections and maintenance lighting in various industrial environments.



1x21700

Utility Model Patent 201920500579.6

62

> LIGHTING FOR EXTREMES

SIZE: 6.18" x 1.57" x 1.04" / 157 x 40 x 26.5 mm

WEIGHT: 7.76 oz / 220 g (including battery)



WT16R MULTIPURPOSE AND RECHARGEABLE WORK LIGHT

300 lumens **□** 115 meters 30 hours

- Combines spotlight, floodlight and yellow flash in one.
- Super magnets are placed in the back and tail of the light for metal
- Widened stainless steel body clip for firm connection to pack and pocket.
- Battery level indication for instant checking of remaining battery level.



The Fenix WT16R combines spotlight, floodlight and yellow flash, the innovative COB (Chip On Board Light) side light allows for reliable lighting and safe warning. The magnetic back is perfect for hand-free use; you can either tail stand the light or use the heavy-duty body clip to hold the flashlight in your pocket. A third option is to attach the flashlight to a nearby metal surface with the magnetic tail. The WT16R LED work light will become your essential tool to use around the house or out in the field, especially for kinds of industrial workplaces.







SIZE: 5.00" x 1.46" x 1.02" / 127 x 37 x 26 mm WEIGHT: 4.55 oz / 129 g (including battery)

| IP66 |
|---------|
| 2000mAh |

| | Spotlight High | Spotlight Med | Spotlight Low | Floodlight High | Floodlight Low | Floodlight Yellow Flash |
|---------|--------------------|--------------------|---------------|--------------------|--------------------|----------------------------|
| OUTPUT | 300 lumens | 100 lumens | 30 lumens | 300 lumens | 100 lumens | 10 lumens |
| RUNTIME | 3 hours 50 minutes | 9 hours 20 minutes | 30 hours | 3 hours 50 minutes | 9 hours 20 minutes | 1 |





- 105° adjustable beam angle
- Four brightness levels; 1000 lumens max output.
- Magnetic base for hands-free use.
- Convenient magnetic charging.

| **SIZE:** 5.33" x 1.16" x 0.95" / 135.3 x 29.4 x 24.1 mm | **WEIGHT:** 4.83 oz / 137 g (including battery)


| IP66 | 1x18650

The Fenix WT25R rechargeable pivoting flashlight is the specifically designed multifunctional workhorse for industrial maintenance and operations. What makes the WT25R special is the ability to angle the head of the flashlight up to 105°, allowing for multiple lighting directions. You can attach the flashlight to a nearby metal surface with the magnetic tail. The WT25R features magnetic charging with the included 3400mAh rechargeable Li-ion battery. The Fenix WT25R LED work light will become your favorite tool to use around the house or out in the field, especially for kinds of industrial workplace.







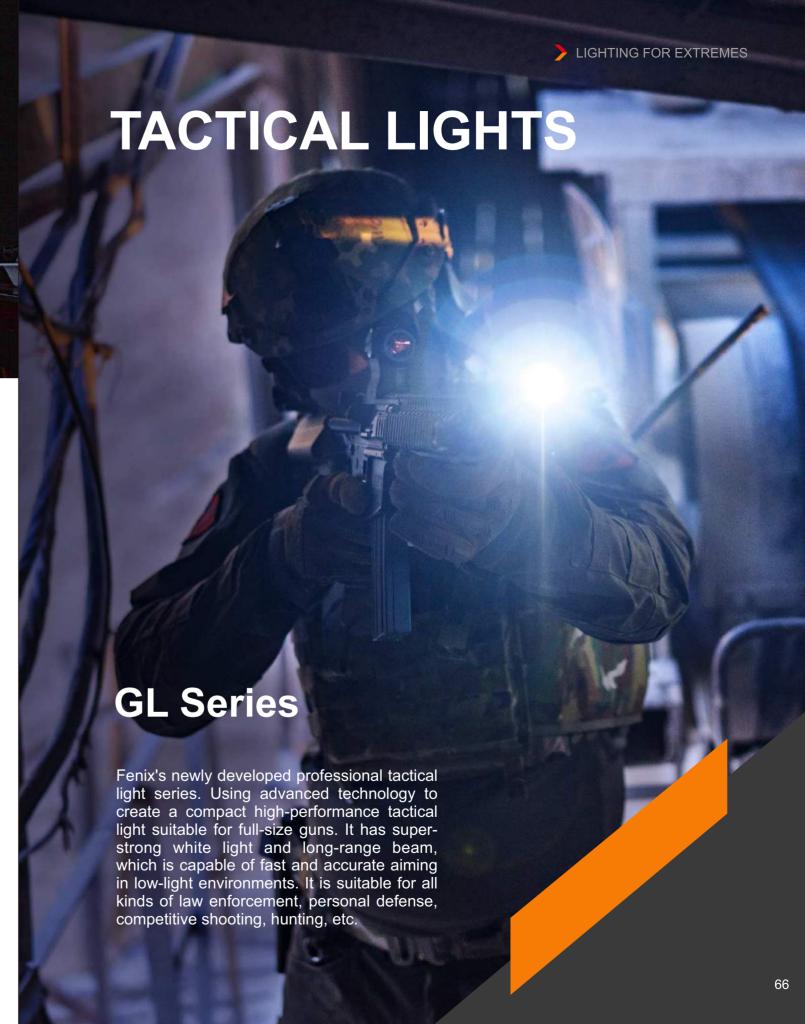

GL19R

HIGH-PERFORMANCE RECHAR-GEABLE TACTICAL LIGHT

अस्त अस्तित्व वस्तवस्त्रम् वस्त



Fenix GL19R is designed to improve the visibility and aiming ability in shooting activities. The compact structure can provide up to 1200 lumens of intense white light and a powerful beam distance of 210 meters. The patented quick-release structure allows the tactical light to be firmly mounted on the gun rail. Dual tail switch, providing instantaneous light and constant light functions. With a multifunctional Type-C charging interface, the light can be charged easily, and also compatible with remote pressure switch, suitable for all kinds of law enforcement, personal defense, competitive shooting, hunting and other activities.









- Patented quick-release structure.
- Ultra-high output of 1200 lumens.
- USB Type-C charging port.
- Two-handed operation with dual tactical tail switch.
- Instant strobe.

| **SIZE**: 3.04" x 1.35 x 1.19" / 77.3 x 34.2 x 30.2 mm | **WEIGHT**: 3.53 oz / 100 g (including battery)

| | | VEN |
|---|--|--------|
| | | |
| | | 6 |
| 1 | الق | |
| 4 | E3 18350 BATTERY FENIX GL 19 LHTY08200 | DR (0) |
| | Lini | |
| | | |

| ~A~ | IP68 |
|-----|---------|
| | 1x18350 |

| | Turbo | High | Strobe |
|---------|-------------|------------|-------------|
| OUTPUT | 1200 lumens | 350 lumens | 1200 lumens |
| RUNTIME | 1 hour | 2 hours | 1 |

GL22

RED LASER TACTICAL LIGHT

The Fenix GL22 Red Laser Tactical Light is compact white light and Red laser combo, integrating wide compatibility and great accuracy. The red laser (635 nanometers) is highly visible to the human eyes, helping the user get on target quickly and accurately. Its recoil-proof LED white light emits a max output of 750 lumens and a robust beam distance of 180 meters. It is able to attach securely to both Universal and Picatinny accessory rails, which enhances visibility and targeting capability in law enforcement, self-defense, shooting and hunting.

*Laser parameters: CLASS 3R, laser wavelength 640-660nm, laser power output <5mW.









- Max 750 lumens output and 180 meters beam distance.
- Precise red laser sight.
- Design for guns with tactical rails.
- Two-handed operation with dual tactical tail switch.
- Instant strobe.

| SIZE: 2.64" x 1.65 x 1.22" / 67 x 42 x 31 mm | WEIGHT: 3.32 oz / 94 g (including battery)



| File State | IP66 |
|------------|----------------------|
| | 1x16340/ 1xCR123A |

| | White Light | Red Laser Light | Strobe |
|---------|-------------|-----------------|------------|
| OUTPUT | 750 lumens | 1 | 750 lumens |
| RUNTIME | 35 minutes | 17 hours | 1 |

HEADLAMPS

Fenix headlamps have an unequaled fit and finish. Our headlamps provide essential lighting for hikers, runners, campers and hunters, and are reliable light sources for many industrial workers. Fenix applies its years of LED experience to the crafting of ultra-bright headlamps that are comfortable to wear and easy to use in a variety of conditions. Whether your adventures or work need ultra-light all-day comfort or high-performance lighting for an extended expedition, the Fenix Headlamp series has a lamp for the occasion. Grab a Fenix headlamp for hands-free illumination.





LIGHTING FOR EXTREMES

With exquisite appearance, excellent performance and wide-ranging output options, Fenix develops the HL series with optimum weight-to-output ratios. The waterproof rating is IPX8, and with their high-lumen output, are ideal for outdoor hiking, jogging, climbing, camping and any form of daily use, making you enjoy real outdoor fun in various environments and weather conditions.





HL18R

HL18R-T





HL32R

HL40R

HL60R











- Max 400 lumens output.
- Spotlight and floodlight sources; dual switch for easy operation.
- Micro USB charging; battery level indication.
- The battery is replaceable for extended runtime.
- 60° tilt mechanism directs the beam where needed.




| SIZE: 2.27" x 1.67" x 1.46" / 57.7 x 42.3 x 37 mm | WEIGHT: 2.82 oz / 80 g (including battery)






| IP66 |
|-----------------|
| 1x1300mAh/3xAAA |

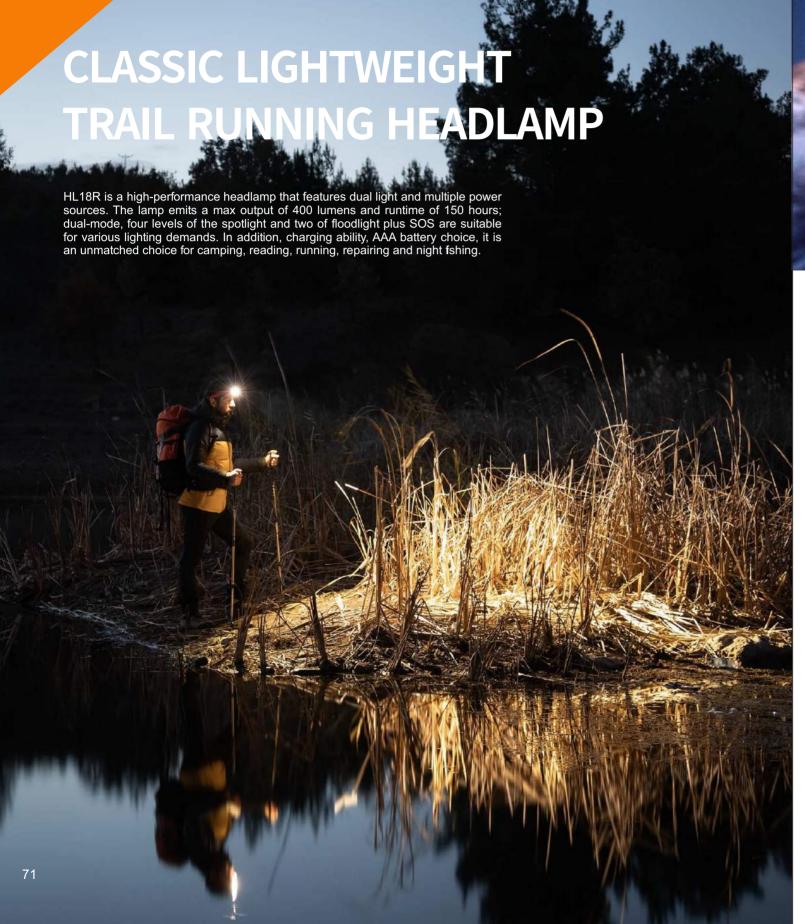


HL18R-T

RECHARGEABLE LIGHTWEIGHT TAIL RUNNING HEADLAMP


The Fenix HL18R-T is a lightweight trail running headlamp. This attractive running headlamp has two power source options controlled by two independent switches. The headband of the Fenix HL18R-T is reflective. Additionally, you can easily charge the headlamp with the included Micro USB cord. The max output of the Fenix HL18R-T is 500 lumens, with a 20-hour runtime mode for trail running. Get running today with the new Fenix HL18R-T.

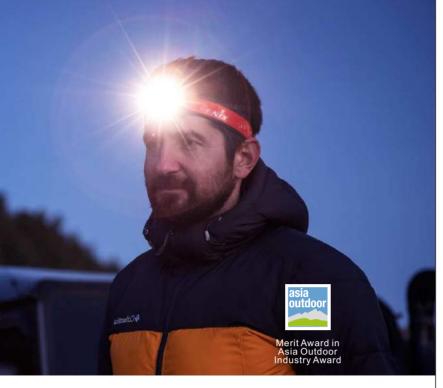









- Max 500 lumens output.
- Lockout function avoids accidental activation.
- Dual switch for easy and fast operation.
- Three spotlight and two floodlight output levels.
- Micro USB rechargeable, 5V/1A for direct charging.
- Single-handed operation with the new SPORT Headband Fit System.

SIZE: 2.70" x 1.85" x 1.55" / 68.5 x 45 x 39.5 mm | WEIGHT: 3.21 oz / 91 g (including battery)

| | NEW |
|----------|-----|
| | |
| | |
| FENIX 00 | |
| | |


| IP66 |
|---------------------|
| 1x1300mAh /3xAAA |

Utility Model Patent ZL 201420202409.7

| Spotlight High | | Spotlight Med | Spotlight Low | Floodlight Low | Floodlight SOS | |
|-----------------|------------------------------|---------------|---------------|----------------|----------------|--|
| OUTPUT | OUTPUT 500 lumens 200 lumens | | 70 lumens | 30 lumens | 4 lumens | |
| RUNTIME 3 hours | | 8 hours | 20 hours | 30 hours | 300 hours | |

HL32R HIGH-PERFORMANCE LIGHTWEIGHT HEADLAMP

| IP66 |
|---------|
| 2000mAh |



- Max 600 lumens output.
- Dual switch for easy and fast operation.
- Micro USB rechargeable
- Battery level indication; lockout function.
- Red flash warning function.


SIZE: 2.52" x 1.81" x 1.48" / 64 x 46 x 37.5 mm | WEIGHT: 3.81 oz / 108 g (including battery)



y Model Patent ZL 201720607070.2 ZL 201730521452.9

HL40R ALL-ROUND ROTARY FOCUSING HEADLAMP

| File of the second | IP66 |
|--------------------|---------|
| | 2000mAh |



- Max 600 lumens output.
- One-handed rotary focusing of spotlight and floodlight.
- Overlapping headband, large bearing
- Micro USB charging.
- Battery level indication; lockout function.

SIZE: 2.68" x 2.13" x 1.65" / 68 x 54 x 42 mm WEIGHT: 4.59 oz / 130 g (including battery)







HL60R

DUAL LIGHT SOURCE RECHARGEABLE HEADLAMP

Featuring a Micro USB port for go-anywhere charging, the HL60R Headlamp delivers a maximum output of 950 lumens, beam throw of up to 116 meters and runtime of up to 100 hours from just one 18650 Li-on battery. This feature-rich headlamp is equipped with neutral white LED for better color rendering, a side switch to activate five output modes and a red light alert mode.









- Max 950 lumens output.
- White and red light sources.
- Made of quality aluminum.
- Micro USB rechargeable.
- 160° adjustable angle.





| **SIZE**: 3.43" x 2.01" x 1.81" / 87 x 51 x 46 mm | **WEIGHT**: 4.27oz / 121 g (excluding battery)



| 1 | |
|---|--|

| ~#~ | IP68 |
|-----|------------------|
| | 1x18650/2xCR123A |

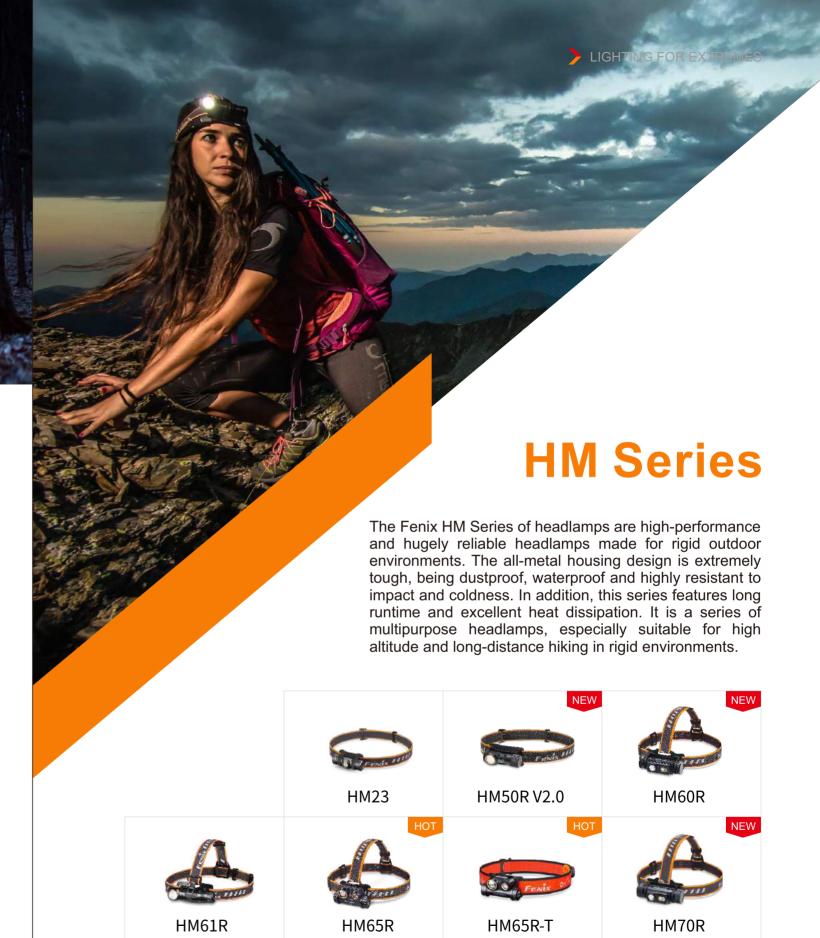

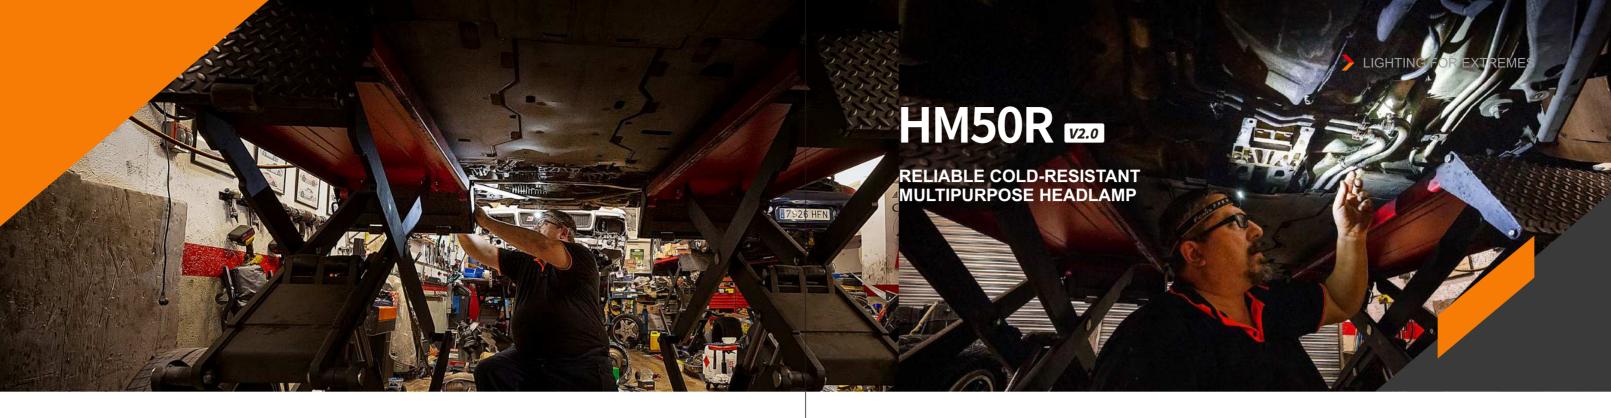

HM23 COMPACT AND ULTRALIGHT HEADLAMP

| ~#~ | IP68 |
|-----|------|
| | 1xAA |





- Made of high-strength aluminum.
- 180° adjustable angle.
- Three output levels for kinds of lighting demands.
- One-switch control for easy and fast operation.
- Low-voltage warning.

SIZE: 2.74" x 1.57" x 1.26" / 69.5 x 40 x 32 mm | WEIGHT: 2.15 oz / 61 g (excluding battery)



ZL 201720607070.2 ZL 201420202409.7





Max 700 lumens output for kinds of outdoor lighting needs.

■ White and red light sources for different

USB Type-C charging for convenient use.

Cold-resistant ability.

SIZE: 2.52" x 1.42" x 1.26" / 64 x 36 x 32 mm WEIGHT: 2.75 oz / 78 g (including battery)



Itility Model ZL 201720607070.2 ZL 201420202409.7

IP68 1x16340/1xCR123A

The Fenix HM50R V2.0 is a rechargeable dual-purpose headlamp. One 16340 rechargeable Li-ion battery is included or you can use one CR123A lithium battery to power it. The HM50R V2.0 is outstanding with its solid construction and lightweight size, plus it is detachable to be used as a mini flashlight. This rechargeable headlamp combines white and red lights, comes with a USB Type-C charging cable and features an IP68 rating, all of which make the Fenix HM50R V2.0 perfect for camping, hiking or working in rigged environments.








HM60R

INTELLIGENT FREQUENCY-SENSING OUTDOOR HEADLAMP

The Fenix HM60R is an intelligent outdoor headlamp that provides ultra-long runtime. Featuring spot- and floodlights, the headlamp is excellent both in long-distance and wide-angle lighting. With the use of frequency-sensing brightness technology, the headlamp changes its brightness to adapt to different activities. As the user's step frequency increases or decreases the brightness will gradually increase or decrease accordingly, which makes it truly intelligent for high-intensity trail running.











- Max 1200 lumens output and 116 meters beam distance.
- Spotlight, floodlight and red light combined.
- Frequency sensing: the brightness changes along with the speed.
- Hidden inner waterproof USB Type-C charging interface.
- Made of quality PC and aluminum, lightweight and wear-resistant.

SIZE: 3.35" x 1.77" x 1.77" / 85 x 45 x 45 mm | WEIGHT: 5.54 oz / 157 g (including battery)



| - Thr | IP68 |
|-------|---------|
| | 1x18650 |

Utility Model Patent ZL 201720607070.2

| | Spotlight Turbo | Spotlight High | Spotlight Med | Spotlight Low | Floodlight High | Floodlight Med | Floodlight Red Light | Floodlight Red Flash |
|---------|--------------------|-------------------|------------------|------------------|--------------------|-------------------|-------------------------|-------------------------|
| OUTPUT | 1200 lumens | 350 lumens | 130 lumens | 30 lumens | 350 lumens | 70 lumens | 5 lumens | 5 lumens |
| RUNTIME | 2 hours | 8 hours | 18 hours | 54 hours | 8 hours | 24 hours | 100 hours | 200 hours |



MULTIFUNCTIONAL RECHARGEABLE HEADLAMP










OR EXTREMES

1200 lumens

145 meters

300 hours



- Can be used as a flashlight.
- Simple operation with large side switch; 180° adjustable angle.
- Magnetic charging; battery level indication; charging indication.
- Magnetic tail, right-angled lighting.

Utility Model Patent ZL 201720607070.2


SIZE: 3.98" x 1.81" x 1.42" / 101 x 46 x 36 mm WEIGHT: 3.51 oz / 99.5 g (excluding battery)



| ~ U ~ | IP68 |
|--------------|----------------------|
| | 1x18650/ 2xCR123A |




HM65R TRI-PROOF MAGNESIUM HEADLAMP WITH DUAL LIGHT SOURCES




- Max 1400 lumens output.
- Separately controlled spotlight and floodlight.
- Dustproof, waterproof and impact-resistance.
- Quality aluminum, magnesium and PC material, lightweight and durable.
- USB Type-C fast charging.



Fenix HM65R is a headlamp with IP68 rated protection that suits close-in and long-distance illumination. Uses white and neutral white LED's, delivering a max output of 1400 lumens, a max beam distance of 163 meters, and a max runtime of 280 hours. Separately controlled dual switches, max 1000 lumens of spotlight, max 400 lumens of floodlight. Powered by a single 18650 rechargeable Li-ion battery, 2 CR123A Lithium batteries can be used as well; USB Type-C charging. HM65R is your unmatched choice for long-time and high-intensity outdoor activities.














tility Model ZL 201720607070.2 / ZL 201420476030.5 ZL 201420202409.7

SIZE: 3.17" x 2.17" x 1.57" / 80.5 x 55 x 40 mm | WEIGHT: 3.42 oz / 97 g (excluding battery)

| ~ J | IP68 |
|------------|----------------------|
| | 1x18650/ 2xCR123A |



The Fenix HM65R-T rechargeable headlamp is designed for trail running. This new Fenix headlamp is constructed from ultra-lightweight magnesium material. With two LEDs, the HM65R-T can reach 1500 lumens. With an all-new body designed from magnesium, the Fenix HM65R-T headlamp has an IP68 rated protection, and 2 meters of impact resistance. The included hollow headband provides comfort and adjustability for a perfect fit in every situation. It is recommended to use the Fenix HM65R-T for trail running trips where you will need to light your path quickly and hands-free.



- Lightweight magnesium material.
- New SPORT Headband Fit System.
- Ultra-long runtime for professional races.
- Hidden USB Type-C charging port fast charging.
- Widened headband design stable and







iF DESIGN Award

Silver Award in Asia Outdoor Industry Award

IP68 1x18650/2xCR123A

Utility Model Patent ZL 201921909465.3

SIZE: 3.15" x 1.85" x 1.54" / 80 x 47 x 39 mm WEIGHT: 3.21 oz / 91 g (excluding battery)

| | Spotlight High | Spotlight Med | Spotlight Low | Floodlight High | Floodlight Med | Floodlight Low |
|---------|----------------|---------------|---------------|-----------------|----------------|----------------|
| OUTPUT | 1300 lumens | 400 lumens | 130 lumens | 400 lumens | 70 lumens | 5 lumens |
| RUNTIME | 4 hours | 12 hours | 24 hours | 12 hours | 33 hours | 300 hours |

HM70R TRIPLE LIGHT SOURCE RECHAR **GEABLE 21700-POWERED HEADLAMP** The Fenix HM70R is an all-metal headlamp that provides long-distance and wide-range lighting. This versatile headlamp is fitted with red and white light sources plus/a red flash mode for alerting purposes. Powered by a powerful 21700 battery and it is compatible with a 18650 battery (with an ALF-18 battery holder) as well. It is rechargeable with a hidden USB Type-C charging port for go-anywhere charging. Featuring a large-sized switch, impact resistant to 2 meters it can be your trustworthy. impact-resistant to 2 meters, it can be your trustworthy lighting tool for high-intensity outdoor work and it is ready



to travel with you to a variety of challenging activities.

- Max 1600 lumens output and 100 hours runtime.
- All-metal housing.
- White, neutral white and red light sources for different applications.
- Hidden USB Type-C charging port fast charging.
- High reliability provides reliable lighting for a lot of work.

Utility Model Patent ZL 201720607070.2










SIZE: 3.72" x 2.01" x 1.81" / 94.5 x 51 x 46 mm


WEIGHT: 7.27 oz / 206 g (including battery)

| | Spotlight Turbo | Spotlight High | Spotlight Med | Spotlight Low | Floodlight Red Light | Floodlight Med | Floodlight High | Floodlight Red Flash |
|---------|--------------------|-------------------|------------------|------------------|-------------------------|-------------------|--------------------|-------------------------|
| OUTPUT | 1600 lumens | 500 lumens | 150 lumens | 30 lumens | 5 lumens | 70 lumens | 400 lumens | 5 lumens |
| RUNTIME | 4 hours | 6 hours | 30 hours | 100 hours | 400 hours | 48 hours | 8 hours | 800 hours |

HP Series

Taking full advantage of modern lighting technology and creative design, Fenix successfully develops the HP series headlamps with outstanding performance. By using a metal housing and constant brightness regulating circuit, Fenix's HP series produces much brighter beams and offers more rescuing, caving, cycling, mountaineering and hiking, etc.

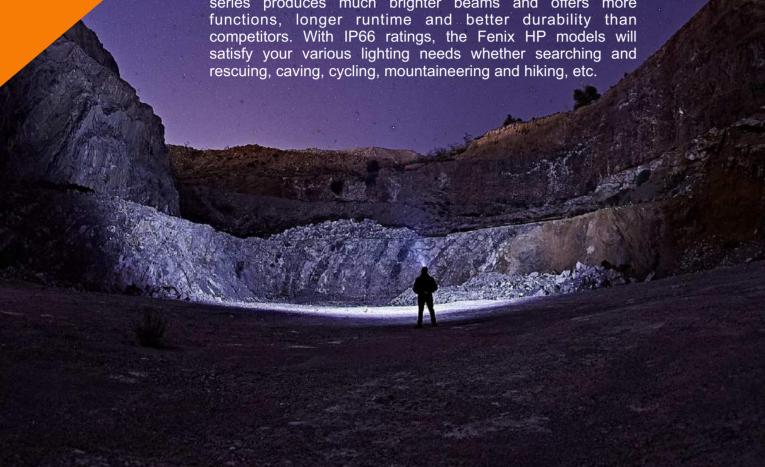





HP25R V2.0



HP30R V2.0

HP16R

HIGH-PERFORMANCE RECHAR GEABLE OUTDOOR HEADLAMP

The Fenix HP16R is a rechargeable high-performance outdoor headlamp. The spot- and floodlight can be used simultaneously or separately to deliver a max output of 1250 lumens, runtime of 300 hours. The HP16R is a headlamp with a separate battery case, powered by the included Fenix ARB-LP3000 Li-polymer battery. the headlamp can also run on 4 Ni-MH/Alka batteries. The HP16R will be an indispensable aid in your mountaineering, searching, snow-hiking or any other challenging outdoor activities.






1250 lumens



255 meters



300 hours




- Two power sources for free choice.
- USB Type-C charging port fast charging.
- Separately controlled dual switch; lockout function avoids accidental activation.
- Made of quality plastics and aluminum, integrated die-casting for better heat dissipation and safety performance.



SIZE: 2.44" x 1.85" x 1.26" / 62 x 47 x 32 mm WEIGHT: 7.62 oz / 216 g (including battery)























- Max 1600 lumens output.
- Spotlight, floodlight and red light.
- High-reliability aluminum offers excellent heat dissipation.
- USB Type-C charging port fast charging.
- Powered by 21700 battery and compatible with 18650 battery.



| File S | IP66 |
|--------|-----------------|
| | 1x21700/1x18650 |

SIZE: 2.36" x 1.85" x 1.30" / 60 x 47 x 33 mm WEIGHT: 8.40 oz / 238 g (including battery)

Utility Model Patent ZL 201720607070.2











120 hours



- Twisty switch for easy and fast
- A waist-worn battery case can be placed in pocket and pack.
- USB Type-C charging port fast charging.
- Power bank function.



SIZE: 3.62" x 2.20" x 1.73" / 92 x 56 x 44 mm WEIGHT: 15.41 oz / 437 g (including battery)

| IP66 |
|---------|
| 2x21700 |



WH23R INDUCTION SPOT& FLOOLIGHT HEADLAMP

600 lumens
100 meters

37 hours

Max 600 lumens output and 100 meters beam distance.

- Spotlight, floodlight and combined output.
- Rotary switch for precise operation even with gloves.
- Gesture sensing for on/off.
- The center-rotating headlamp holder balances and improves the comfort of wearing.

| **SIZE:** 3.46" x 1.89" x 1.65" / 88 x 48 x 42 mm | **WEIGHT:** 4.23 oz / 120 g (including battery)



WH23R is a dual-light source headlamp with a gesture-sensing function. When the sensor function is activated, you can turn on or off the headlamp with a wave of hands to avoid dirtying the headlamp. The combined rotary switch can be operated conveniently and quickly even with gloves. The three modes of spotlight, floodlight and combined light can be freely selected, which can easily cope with various complex working environments.





BC Series

With rich experience in bicycle light design and the use of advanced patented technologies such as anti-glare, intelligent wireless control and two-step quick release, Fenix versatile bicycle lights are dedicated to cyclists of all types. Their durable construction allows them to withstand heavy use in harsh conditions, while their brilliant LED beams produce high outputs that can be adjusted to suit your needs. With a Fenix bicycle light, you can expect the best and the brightest, with practical features, no matter where your bike takes you. From deserted night-time trails to urban environments, a Fenix bicycle light helps you see and be seen in the dark so you remain safe on your cycling adventure. No matter where your cycling takes you, you can depend on a Fenix bike light to illuminate your way.



BC05R ULTRA-COMPACT RECHARGEABLE BICYCLE TAILLIGHT

WEIGHT: 0.99 oz / 28 g (including battery)

IP66■■ 400mAh



The upgraded Fenix BC05R V2.0 version is an ultra-compact rechargeable bicycle taillight with an eye-catching red light built for cycling commuters and lovers. Being seen far away in traffic with 15-lumen red light and 180° lighting angle will help make your bicycle commute much safer and provide peace of mind on your cycling trip. Quickly charge the BC05R V2.0 via the USB Type-C interface, the built-in 400mAh Li-polymer battery delivers a max runtime of 120 hours. With the included body clip, the versatile taillight can be used as a chest lamp or backpack light



BC21R HIGH-PERFORMANCE FRONT BICYCLE LIGHT FOR CYCLE-RACING

| ~h~ | IP68 |
|-----|---------|
| | 1x18650 |





| IP66 |
|-----------|
| 1x2600mAh |



BC26R

ULTRA BRIGHT RECHARGEABLE BICYCLE LIGHT

Fenix BC26R is a professional bicycle light for mountain and road cycling, suitable for high-intensity and long-distance cycling users. The bicycle light emits an impressive output of 1600 lumens and can be seen at an impressive 169 meters. Getting powered by the included 21700/5000mAh battery, and the light is USB Type-C rechargeable. It can be used with a bicycle helmet holder and can be installed on a GoPro standard interface for safer riding. Innovatively designed quick-release mount and full-metal housing for better dissipation allow this versatile light to illuminate your trails confidently.









- Max 1600 lumen output and 169 meters beam distance.
- USB Type-C charging.
- Quick-release design, two-step assembly and disassembly.
- Easy and fast operation with a single switch.
- Flash mode warns backside approaching drivers and passengers.




| **SIZE**: 4.45" x 1.14" x 1.06"/113 x 29 x 27 mm | **WEIGHT**: 5.47 oz/155 g (including battery)

| M | IP68 |
|---|---------|
| | 1x21700 |



The BC30R 2017 is a Micro USB rechargeable bicycle light that features a digital display screen for confidence-inspiring readings. It is fitted with two Cree XM-L2 U2 neutral white LED's and emits a max output of 1800 lumens with a featured dual distance beam system. OLED display panel, which displays the remaining runtime at the current output level, and the battery percentage clearly, as riders need not only comfortable lighting but also need to know the remaining runtime, whether during mountain biking or urban riding.

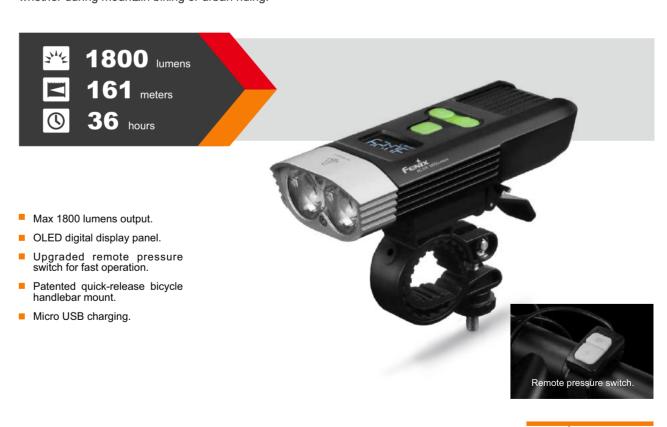

SIZE: 4.49" x 1.97" x 1.25" / 114 x 50.5 x 31.8 mm

WEIGHT: 7.82 oz / 221.6 g (including battery)

IP66 ■■ 5200mAh






| SIZE: 4.72" x 1.99" x 1.25" / 120 × 50.5 × 31.8 mm |
|--|
| WEIGHT: 5.43 oz / 154 g (excluding battery) |

| ~#~ | IP67 |
|-----|------------------|
| | 2x18650/4xCR123A |

| | Burst | High | | Low | | Flash |
|---------|-------------|-------------|------------|------------|-----------|------------|
| OUTPUT | 2200 lumens | 1500 lumens | 600 lumens | 200 lumens | 50 lumens | 600 lumens |
| RUNTIME | 1 | 2.3 hours | 6 hours | 16 hours | 50 hours | 1 |



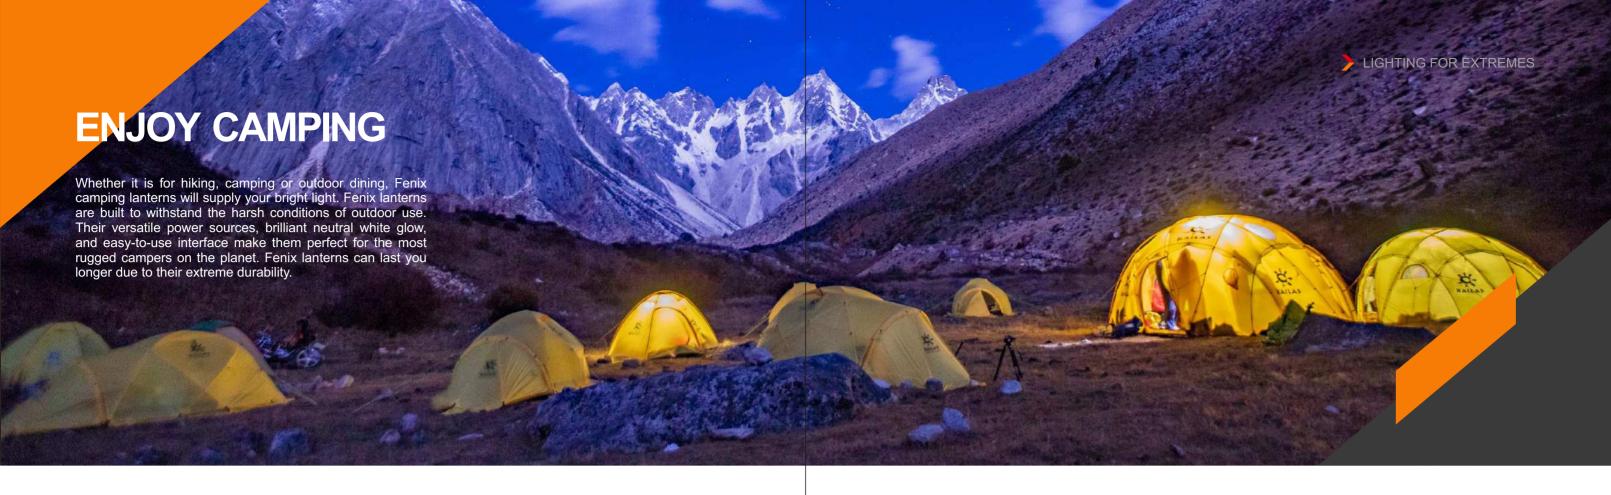


CL Series

Fenix's camping lanterns are all about innovation and provide all-rounder performance. From the icy cold North Pole to the rain-soaked tropical forests, Fenix's all-weather waterproof lanterns provide thorough, uncompromising performance. Features listing from an exclusive dual-fuel battery compartment to multifaceted globe and a magnetic base, Fenix's camping lanterns keep your adventure going, anywhere, anytime!



CL20R POCKET-SIZED RECHARGEABLE CAMPING LANTERN

IP66 1600mAh





- Max 300 lumens and 200 hours runtime.
- White and red light sources.
- Magnetic bottom and hanging loop.
- Micro USB rechargeable.
- Made of quality plastics and high transparent material - smooth anti-glaring



SIZE: 2.83" x 1.97" x 1.63" / 72 x 50 x 41.5 mm WEIGHT: 3.21 oz / 91 g (including battery)

CL26R

HIGH-PERFORMANCE PORTABLE **CAMPING LANTERN**


CL26R is a high-performance rechargeable camping lantern. This compact and portable lantern can provide camping illumination for 2 to 4 persons. Both in-tent illumination and camping illumination are available. Undoubtedly, CL26R will be your best partner during outdoor activities.











- Max 400 lumens output and 25 meters beam diameter.
- Dual-mode design: 6 white output levels, 2 red output levels.
- Top magnetic absorption and tripod socket for effective light fixation and light source control.
- White and red light sources.
- Micro USB rechargeable.
- Excellent cold-resistant design.

SIZE: 3.82" x 1.93" x 1.93" / 97 x 49 x 49 mm WEIGHT: 4.09 oz / 116 g (excluding battery)



| | IP66 |
|--|------------------|
| | 1x18650/2xCR123A |

Black

Utility Model Patent ZL 2017215737626.X

| | High | Med | Low | Front | Down I | Down II | Red Light | Red Flash |
|---------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|
| OUTPUT | 400 lumens | 150 lumens | 40 lumens | 25 lumens | 3 lumens | 25 lumens | 1 lumen | 1 lumen |
| RUNTIME | 5 hours | 15 hours | 30 hours | 58 hours | 240 hours | 58 hours | 200 hours | 400 hours |

CL30R

HIGH-PERFORMANCE CHARGING AND **DISCHARGING CAMPING LANTERN**

The Fenix CL30R rechargeable camping lantern offers flexibility in power, charging and brightness levels. This versatile lantern not only features a Micro USB port for recharging, but it is the first Fenix lantern that serves as an independent charging station for other devices. Powered by one, two or three 18650 rechargeable batteries, this lantern offers five brightness levels, Turbo and Flash. The CL30R features a cold-resistant battery compartment for all-season use charging and battery. compartment for all-season use, charging and batterylevel indicators for accurate operation, and a hanging lanyard and tripod socket for flexible lighting options.



LIGHTING FOR EXTREM









650 lumens

35 meters

(1)

400 hours



| Max | 650 | lumens | output, | 35 | meters |
|------|--------|--------|---------|----|--------|
| bean | า dian | neter. | | | |

- Independent circuit design.
- Micro USB charging and discharging function.
- Built-in hanging loop and tripod socket interface
- Can be floated on the water.

SIZE: 5.35" x 3.66" x 3.66" / 136 x 93 x 93 mm WEIGHT: 14.5 oz / 412 g (excluding battery)

| ~#~ | IP67 |
|-----|-----------|
| | 1~3x18650 |



Batteries



Rechargeable Batteries

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short-circuiting caused by collision or impact.

- Triple overheat design, safe and reliable.
- Built-in overcharge and over discharge protection circuit to ensure battery life.
- The circuit board is fully protected, with high

| Model | Type | Capacity | Voltage |
|-------------------|-----------|----------|---------|
| ARB-L16-700P | 16340 | 700 mAh | 3.6V |
| ARB-L16-700UP | 16340+USB | 700 mAh | 3.6V |
| ARB-L18-2600 | 18650 | 2600 mAh | 3.6V |
| ARB-L18-2600U | 18650+USB | 2600 mAh | 3.6V |
| ARB-L18-3000P | 18650 | 3000mAh | 3.6V |
| ARB-L18-3400 | 18650 | 3400 mAh | 3.6V |
| ARB-L18-3400U | 18650+USB | 3400 mAh | 3.6V |
| ARB-L18-3500 | 18650 | 3500 mAh | 3.6V |
| ARB-L18-3500U | 18650+USB | 3500 mAh | 3.6V |
| ARB-L21-4000P | 21700 | 4000 mAh | 3.6V |
| ARB-L21-5000 | 21700 | 5000 mAh | 3.6V |
| ARB-L21-5000 V2.0 | 21700 | 5000 mAh | 3.6V |
| ARB-L21-5000U | 21700+USB | 5000 mAh | 3.6V |



ALF-18 (Battery Holder)

The Fenix 18650 Li-ion battery can be used as a 21700 Li-ion when combined with this battery holder.

- PC + ABS materials reliable and durable.
- Copper plated positive contact excellent performance in conductivity.
- Size: 2.41" x 0.85" / 61.2 x 21.5 mm.
- Weight: 0.22 oz / 6.1 g.

Chargers ==

Fenix provides different kinds of multifunctional chargers for various battery types. Which all feature readable charging indication, and guarded with multiple protection that effectively prevents from overcharging and short circuit.



ARE-A2 (Dual Channel Charger)

Fenix ARE-A2 is a dual channel charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries.
- AC and DC charging modes.
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/ Ni-Cd).
- Rated output power: 3W (Ni-MH/ Ni-Cd), 8.4W (Li-ion).
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection



ARE-A4 (Multifunctional Charger)

Fenix ARE-A4 is a four channels smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries.
- AC and DC charging modes.
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/ Ni-Cd).
- Rated output power: 6W (Ni-MH/ Ni-Cd), 16.8W (Li-ion).
- Built-in short circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-D1 (Single Channel Multifunctional Charger)

Fenix ARE-D1 is a single channel smart charger that features charging and discharging function. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging and discharging status.
- 0.5/1.0/2.0A three charging current for option
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W(Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection



ARE-D2 (Dual Channel Multifunctional Charger)

Fenix ARE-D2 is a dual channels smart charger that features charging and discharging function. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging and battery status clearly.

- Micro USB charging and USB discharging.
- LCD screen for battery level, charging and discharging status.
- 0.5/1.0/2.0A three charging current for option
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.





ARE-X1 V2.0 (Single Channel Smart Charger)

The Fenix ARE-X1 V2.0 is a single channel smart charger that features USB Type-C charging and USB discharging function, designed for 18650, 21700 and 26650 batteries, and provides charging, discharging, and battery power detection.

- Compatible with one 18650, one 21700 or one 26650 rechargeable Li-ion battery.
- Supports USB Type-C charging and USB discharging.
- LED charging/discharging indicator; LED battery power detection.
- Short circuit, over-current, over-voltage and reverse polarity protection.
- Microcomputer chip controlled, digitally regulated charging to extend battery life.

Diffuser Tip /Filter Adapter /Traffic Wand



AOD-S/AOD-S V2.0 (NEW)/AOD-M (Diffuser Tip)

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Durable, impact resistant and fireproof to V2 Standard.
- Easy operation.
- Imported novel optical material guarantees quality.



AOF-S/AOF-S⁺/AOF-M/AOF-L (Filter Adapter)

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with anti-reflective coating that provides heat resistance and maximum light penetrability.
- Germany's Bayer PC 2805 material, aging and impact resistant.
- Anti-roll design, easy to assemble and disassemble.

AOT-S/AOT-M/AOT-L (Traffic Wand)

option for emergency situations and traffic control.



- German Bayer PC2805 material.
- High compressive strength, impact resistance.
- High temperature resistance and benign thermal stability.
- Easy to assemble and disassemble.

It can be used



It can be used as a high-visibility traffic wand with different colors (red or green light) when combined with multicolored flashlights, such as TK26R, and supplies for traffic and path guidance.

Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best

- Made of quality PC, ensures high transparency and soft beam.
- Acting as a diffuser tip when combine with a white light flashlight.
- Size: 5.24" x 1.83" / 133 x 46.5 mm.
- Applicable to flashlight with a head diameter of 40mm.

Tactical Accessories

The Fenix tactical accessories enhance your tactical flashlight's capabilities for any tactical situation.

TO BE

AER-02 V2.0 (Tactical Remote Pressure Switch)

The Fenix AER-02 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and anti-abrasive finish.
- Tail adapter size: 25.4mm Diameter x 31.5mm Length.
 IP68 rated protection: 2 meters underwater
- Applicable to Fenix 18650-powered flashlights with a single tail switch.

The allowed many

AER-03 V2.0 (Tactical Remote Pressure Switch)

The Fenix AER-03 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination and output selection (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and
- Tail adapter size: 26.5mm Diameter x 32mm Length.
- IP68 rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with dual tail switch.



AER-04 (Remote Pressure Switch)

The new Fenix AER-04 remote pressure switch is specialized in tactical flashlights using 21700 battery. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a full-silent forward switch and a tape switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14" / 29mm.
- Applicable thread: Tr25.5 x 0.06" / 1.5 mm
- Cable length: 9" / 230 mm.
- Full length: 14.4" / 365 mm.
- Weight: 1.48 oz / 42 g.





AER-05 (Remote Pressure Switch)

The Fenix AER-05 remote pressure switch is specialized in tactical flashlights with APF circuits. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a silent pressure pad switch and a round tactical switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1 14" / 29 mm
- Applicable thread: Tr25.5 x 0.06" / 1.5 mm
- Cable length: 9" / 230 mm.
- Full length: 13.4" / 340 mm.
- Weight: 1.48 oz / 42 g.



ALG-00 (Rail Mount)

ALG-00 features the quick detachable Picatinny rail design which suits for tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5-26mm, and wrench is needed when clip flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hardanodized anti-abrasive finish in all black treatment without light reflection.



ALG-05 (Tactical Remote Pressure Switch Mount)

The Fenix ALG-05 tactical remote pressure switch mount is specially designed for Fenix AER series tactical remote pressure switches. It perfectly fits the Picatinny rail by a simple push; featuring convenient assembly and disassembly, the mounting position can be flexibly adjusted. Designed specifically for tactical lighting, the remote pressure switch is within easy reach, so the flashlight can be momentarily switched on with a press of the button. The whole body of the mount is made of aluminum alloy with hardanodized finish, and it is not reflective in matte black, which meets the needs of tactical concealment





ALG-06 (Tactical Remote Pressure Switch Mount)

The ALG-06 tactical remote pressure switch mount can adapt the AER-02/03/04/05 remote pressure switch to the M-LOK rail, which is lightweight, and reliable.

- Lock fixation ensures no displacement.
- All-metal housing.
- Size: 2.72" x 0.94" x 0.39" / 69 x 24 x 10 mm.
- Weight: 0.85 oz / 24 g.



ALG-15 (Rail Mount)

The ALG-15 rail mount can fit a flashlight with a head diameter of less than 40mm and a body diameter of 23.5-26mm on the Picatinny rail (MIL-STD-1913), making quick disassembly and assembly possible by means of a screw nut.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight
- Durable and wear-resistant materia
- Size: 3.03" x 1.18" x 1.22" / 77 x 30 x 31 mm.



ALG-16 M-LOK (Quick-release Rail Mount)

The ALG-16 M-LOK quick-release rail mount can fit the flashlight with a head diameter of less than 40mm and a body diameter of 23.5-26mm on the M-LOK rail, making quick disassembly and assembly possible by hand.

- Fits multiple flashlights with different body diameter
- Quick-release mounting
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 1.85" x 1.65" x 1.18" / 47 x 42 x 30 mm.
- Weight: 1.76 oz / 50 g.



ALG-18 (Rail Mount)

The Fenix ALG-18 rail mount is a functional accessory that helps to perform tactical/hunting applications; which suits weapon barrels ranging from 18 - 22mm. The compatible flashlight body diameter ranges from 24 - 26mm with a light head diameter less than 70 mm. Made of durable and high-strength aluminum, the easy operation effectively assists in tactical/hunting scenarios.

- Allows for quick assembly and disassembly of the gun barrels
- Tool-free assembly and disassembly
- Fits for a variety of barrel dimensions.
- Size: 2.99" x 1.81" x 1.37" / 76 x 46 x 35 mm
- Weight: 3.10 oz / 88 g



ALP-10S/10L (Flashlight Holster)

The Fenix ALP-10 is a holster that is specifically designed for packing and protecting flashlight. The use of anti-tear nylon material features excellent abrasion resistance. Three layers of different materials are used, with one-time hot pressing, which is stylish and durable; the back webbing is designed with a combination of Velcro and nickel-plated metal button, ensuring strong stability and quick-release ability. The holster can be perfectly matched with the belt, backpack, and more. In this way, the flashlight is fully protected in a variety of scenarios such as law enforcement, outdoor lighting, searching and rescuing, etc.

- The use of anti-tear nylon material features excellent abrasion resistance
- Strong stability and quick-release ability.
- Stylish and durable





This is a series of accessories designed for outdoor activities such as running, all perfectly fit the body, and show a sense of sports fashion.





AFB-10 (Sports Fanny Pack)

The Fenix AFB-10 is a waterproof sports fanny pack with large storage capacity. It features adjustable waist strap and cross-shaped headphone hole, making running more enjoyable. In addition, reflective logo ensures safer night running.

- Folded and tensile design, the storage capacity of the pack can be extended.
- The inside is TPU waterproof layer, plus waterproof zipper, all which making the pack resistant to water and sweat.
- Hidden hole for headphone usage.
- High-elastic adjustable belt for closed and personal fit.
- Reflective Fenix logo ensues safer night outdoors.
- 4 colors for options: black, gray, blue, orange.



AFH-02 /AFH-03 (Sports Headband)

- Made of high-elastic and air permeable nylon.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- Hollow design breathable and comfortable



AFH-10 (Sports Headband)

The Fenix AFH-10 is a high-elastic quick-drying sports headband, made of air permeable nylon fabric. The sweat-channeling silicone lines, reflective logo and lines make night activities safer.

- 70% nylon, 30% spandex high-elastic and air-permeable.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- 4 colors for options: black, gray, blue, orange.



APB-20/ABP-30 (Headlamp Storage Bag)

- Made of high-strength nylon cloth lightweight and wear-resistant properties.
- Increased and large storage space, inner mesh cloth bag enough for headlamp and battery storage.
- 50mm long lanyard.
- Applicable headlamps: HL10, HL12R, HL15, HL16, HL18R, HL23, HL26R, HM61R, HM65R, HM65R-T.
- 1000 times cycle use: 1 year free repair, lifetime limited warranty.







ALB-10 (Quick-release Bicycle Mount)

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for guick release.
- Fits flashlights with diameter of 18mm 26mm.
- Rotating 30 degree design adjusts to any locking angle.
- High-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar.
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain.



ALB-20 (Multipurpose Snap Hook)

- Quick-release, stable wearing.
- Bottle opener.
- Straight screwdriver.
- Non-magnetizable.
- Size: 2.12" x 1.13"x 0.93" / 53.8 x 28.6 x 3.5 mm.
- Weight: 0.32 oz / 9 g.
- Material: Titanium alloy Tc4



ALC-01 (Belt Clip)

ALC-01 quick-release belt clip is specifically designed for everyday carry flashlights to free users' hands. It is made of nylon and fiberglass, which features reliability and ruggedness. The belt clip is very convenient to wear on belt, with 300° adjustable angle, it is truly utility in multi-angle lighting for patrolling, tactical training and other outdoor activities.

- Applicable to flashlight with head diameter: 30mm to 44mm.
- Applicable to flashlight with body diameter: 20mm to 26mm.
- Applicable to belt with width: less than 55mm.
- 300° rotary angle.
- Easy to wear and operate.
- Made of nylon and fiberglass.

- Size: 4.9" x 2.8"x 2.0" / 125 x 71.5 x 50 mm.
- Weight: 3.6oz / 102g.
- Compatible products: TK25IR version, TK25 R&B version, TK09, TK15UE, TK16, TK20R, TK26R, TK28 TAC (Remove the grip ring when uses with TK15UE, TK16 and TK20R), etc.
- Parts included: 1 x ALC-01 belt clip. 1 x elastic band.





ALD-05 (Flashlight Helmet Holder)

- Anti-static rubber fixing strap, compatible with all types of helmets.
- Adjustable clamping caliber suitable for flashlights with an outer body diameter of 20-28mm.
- 360° adjustable angle.



ALD-08 (Bicycle Light Helmet Holder)

Applicable to BC21R V2.0, BC25R, BC30R, BC35R, BC30, BC30 V2.0.

- The fitted cable ties are applicable to a variety of bicycle helmets.
- Push and pull for one-second assembly and disassembly.
- Nylon and fiberglass high toughness, strength and durability.
- Weight: 0.39 oz / 11 g.
- Size: 2.87" x 2.20" x 0.55" / 73 x 56 x 14 mm.





ALD-10 (Bicycle Light Holder with GoPro Interface)

The holder is lightweight, and the bicycle light can be easily fixed by a single push. It is applicable to all Fenix bicycle lights.

- International GoPro interface.
- Easy assembly.
- Compact and lightweight.
- Stable and reliable.



ALG-03 V2.0 (Headlamp Attachment)

ALG-03 headlamp attachment is specifically designed for headlamp fixation to outdoor or industrial work helmets. It enables fast and convenient attachment and detachment of headlamp to and from helmet, and allows adjustment of the lighting angle of the headlamps.

- Made of quality nylon durable and eco-friendly.
- Included TESA adhesive tapes.



ALL-01 (Soft Flashlight Lanyard)

ALL-01 is a flashlight lanyard that made of nylon and silicone sleeves. The length of the nylon cord and the silicone sleeves can be adjusted as needed. This flashlight lanyard is very comfortable to the hands and features non-slip as well.

- Applicable products: SD11, SD20, TK47UE, TK47, TK72R, TK75, RC40.
- Size: 0.35" Tube diameter x 9.25" Length / 9 x 235 mm.
- Weight: 0.42 oz / 12 g.



FENIX ACCESSORIES COMPATIBILITY GUIDE

| | В | attery | Batt Hol | ery der | Diffu | ser Tip | o | | Filter A | Adapter | | | Traffic | Wand | | Rail N | lount | Rail Mount | Remo | te Switch | Flash Hols | light ster | Headlamp Storage Bag | Headlamp Attachmen | Bicycle Mount | Belt Clip | Flashlight Helmet Holder | Bicycle Light Hetmet Holder w | Light Holder ith GoPro | |
|-------------------------|------------------|---------------------------------------|-------------|------------|---------------|---------------|---|---|----------------|---------|---|---|---------|------|----|--------|-------|------------|-----------------|-----------|---------------|---------------|-------------------------|-----------------------|------------------|-----------|--------------------------------|-------------------------------------|------------------------------|--------------------------|
| MODEL | | ARB | AL | .F | Α | OD | | | A | OF | | | A | ТС | | AL | _G | ALG | A | ER | AL | .P | APB | ALG | ALB | ALC | ALD | ALD | ALD | MODEL |
| | L16 (16340) (| L18 L2 18650) (217 | 21 1 | 8 S | S | V2.0 | М | S | S ⁺ | М | L | S | М | L | 02 | 00 | 15 | 16 18 | 02 V2.0 03 V2.0 | 04 05 | 105 | 10L | 20 30 | 03 V2.0 | 10 | 01 | 05 | 08 | 10 | |
| Flashlight - E | | , , , , , , , , , , , , , , , , , , , | | | | | | | | | | | | | | | | | | | | | | | | | | | Flash | light - E Series |
| E01 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E01 V2.0 |
| E02R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E02R |
| E03R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E03R |
| E05R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E05R |
| E09R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E09R |
| E12 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E12 V2.0 |
| E18R V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E18R V2.0 |
| E20 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E20 V2.0 |
| E28R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E28R |
| E30R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E30R |
| E35 V3.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | E35 V3.0 |
| E-CP | | | | | | | | | | | | | - | | | | | | | | | | | | - | | | | | E-CP |
| E-LITE | | | | | _ | | | | | | | | | | | | | | | | | | | | - | | | | | E-LITE |
| E-SPARK | | | | | | | | | | | | | - | | | | | | | | | | | | - | | | | | E-SPARK |
| E-STAR Flashlight - LE | 0.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | Fleeblic | E-STAR ght - LD Serie |
| LD02 V2.0 | Series | | | | | Т | | | | | | | | | | | | | | | | | | | T | | | | Fiasniig | LD02 V2.0 |
| LD02 V2.0 LD05 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | - | | | | | LD02 V2.0 |
| LD03 V2.0 | | | | | | | | | | | | | + | | | | | | | | | | | | + | | | | | LD03 V2.0 |
| LD22 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LD22 V2.0 |
| LD30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LD30 |
| Flashlight - PE | D Series | | | | | | | | | | | | | | | | | | | | | | | | | | | | Flashlic | ght - PD Series |
| PD25R | | | | | $\overline{}$ | | | | | | | | Т | | | | | | | | | | | | | | | | | PD25R |
| PD32 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PD32 V2.0 |
| PD35 V3.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PD35 V3.0 |
| PD36R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PD36R |
| PD36 TAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PD36 TAC |
| PD40R V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PD40R V2.0 |
| UC35 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | UC35 V2.0 |
| Flashlight - Th | K Series | | | | | | | | | | | | | | | | | | | | | | | | | | | | Flashlig | ght - TK Serie |
| TK11 TAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK11 TAC |
| TK16 V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK16 V2.0 |
| TK20R V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK20R V2.0 |
| TK22UE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK22UE |
| TK26R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK26R |
| TK28 TAC | | | | | | | | | | | | | _ | | | | | | | | | | | | | | | | | TK28 TAC |
| TK30 | | | | | | | | | | | | | _ | | | | | | | | | | | | | | | | | TK30 |
| TK35UE V2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | TK35UE V2.0 |
| Flashlight - H7 | T Series | | | | | | | | I | T | T | T | _ | T | I | | l I | | | | | | | <u> </u> | | | | | Flashlig | ght - HT Series |
| HT18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | HT18 |
| HT30R | D. Coming | | | | | | | | | | | | | | | | | | | | | | | | | | | | Florit | HT30R |
| Flashlight - LF | Series | | | | | | | | | | | | | | | | | | | | | | | | | | | | Flashlig | ght - LR Series LR35R |
| LR35R LR40R | | | | | _ | | | | | | | 1 | | | | | | | | | | | | | - | | | | | LR35R LR40R |
| LR50R | - | | | | _ | \rightarrow | | | | | | | | | | | | | | | | | | | - | | | | | LR40R LR50R |
| | | | | | - | | | | | - | | 1 | | | | | | | | | | | | | - | | | | - | |
| LR80R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LR80R |

FENIX ACCESSORIES COMPATIBILITY GUIDE

| | Batter | у | Battery Holder | 0 | Diffuser | Tip | | Filter A | Adapter | | | Traffic | Wand | | Rail I | Mount |
|--------------|------------------------|-------------|-------------------|---|----------|-----|---|----------------|---------|---|---|---------|------|----|--------|-------|
| MODEL | ARB | | ALF | | AOD |) | | A | OF | | | AC | DT | | Α | LG |
| | L16 L18 (16340) (18650 | L21 | 18 | S | S V2.0 | | S | S ⁺ | М | L | S | M | L | 02 | 00 | 15 |
| shlight - W | |) (21100) | | | | | | | | | | | | | | |
| NF05E | | | | | | | | | | | | | | | | |
| F11E | | | | | | | | | | | | | | | | |
| WF26R | | | | | | | | | | | | | | | | |
| WF30RE | | | | | | | | | | | | | | | | |
| shlight - W | VT Series | | | | | | | | | | | | | | | |
| WT16R | | | | | | | | | | | | | | | | |
| WT25R | | | | | | | | | | | | | | | | |
| ctical Light | t - GL Series | | | | | | | | | | | | | | | |
| GL19R | | | | | | | | | | | | | | | | |
| GL22 | | | | | | | | | | | | | | | | |
| adlamp - H | IL Series | | | | | | | | | | | | | | | |
| HL18R | | | | | | | | | | | | | | | | |
| HL18R-T | | | | | | | | | | | | | | | | |
| HL32R | | | | | | | | | | | | | | | | |
| HL40R | | | | | | | | | | | | | | | | |
| HL60R | | | | | | | | | | | | | | | | |
| adlamp - H | IM Series | | | | | | | | | | | | | | | |
| HM23 | | | | | | | | | | | | | | | | |
| M50R V2.0 | | | | | | | | | | | | | | | | |
| HM60R | | | | | | | | | | | | | | | | |
| HM61R | | | | | | | | | | | | | | | | |
| HM65R | | | | | | | | | | | | | | | | |
| HM65R-T | | | | | | | | | | | | | | | | |
| HM70R | | | | | | | | | | | | | | | | |
| adlamp - H | IP Series | | | | | | | | | | | | | | | |
| HP16R | | | | | | | | | | | | | | | | |
| HP25R V2.0 | | | | | | | | | | | | | | | | |
| P30R V2.0 | | | | | | | | | | | | | | | | |
| adlamp - V | VH Series | | | | | | | | | | | | | | | |
| WH23R | | | | | | | | | | | | | | | | |
| | - BC Series | | | | | | | | | | | | | | | |
| C05R V2.0 | | | | | | | | | | | | | | | | |
| C21R V3.0 | | | | | | | | | | | | | | | | |
| BC25R | | | | | | | | | | | | | | | | |
| BC26R | | | | | | | | | | | | | | | | |
| 30R 2017 | | | | | | | | | | | | | | | | |
| C30 V2.0 | | | | | | | | | | | | | | | | |
| | tern - CL Series | | | | | | | | | | | | | | | |
| CL20R | | | | | | | | 1 | | | | | | | | |
| CL26R | | | | | | | | | | | | | | | | |
| CL30R | | | | | | | | | | | | | | | | |

FENIX PRODUCTS SPECIFICATION CHART

| МС | DDEL | OUTPUT | RUN | ITIME | DISTANCE |
|----------|-------------|-------------------|----------------------|----------------------|--------------|
| | 111-1- | 100 | | Ni-MH Battery | |
| E01 V2.0 | High Med | 100 lm 25 lm | 50 min 4 h 50 min | 50 min 4 h 30 min | 35 m 19 m |
| E01 V2.0 | Low | 5 lm | 25 h | 23 h | 9 m |
| | High | 200 lm | 25 ri | 49 m | |
| E02R | Low | 15 lm | 6.5 | | 13 m |
| | High | 260 lm | 45 r | nin | 42 m |
| | Med | 80 lm | 1 h 15 | 5 min | 25 m |
| | Low | 30 lm | 3 | h | 16 m |
| E03R | Eco | 5 lm | 18 | h | 7 m |
| | Red | 4 lm | 5 h 3 | 30分 | 10 m |
| | Red Flash | 4 lm | , | ' | / |
| | Burst | 400 lm | , | | 64 m |
| | High | 150 lm | 55 r | | 40 m |
| E05R | Med | 25 lm | 5 | h | 17 m |
| | Low | 3 lm | 30 | h | 8 m |
| | Burst | 600 lm | | 1 | 124 m |
| | High | 300 lm | 1.5 | | 91 m |
| E09R | Med | 100 lm | 4 | | 56 m |
| 20011 | Low | 25 lm | 16 | | 28 m |
| | Moonlight | 3 lm | 70 | | 9 m |
| | High | 160 lm | 1 | | 68 m |
| E12 V2.0 | Med | 30 lm | 13 | | 28 m |
| | Low | 5 lm | 70 | | 12 m |
| | LOW | 3 1111 | Alkaline Battery | | 12111 |
| | High | 350 lm | 3 h 45 min | 1 h 30 min | 126 m |
| E20 V2.0 | Med | 150 lm | 11 h 15 min | 5 h 30 min | 76 m |
| | Low | 30 lm | 93 h 35 min | 34 h 30 min | 35 m |
| | Eco | 5 lm | 200 h 2 h 5 | 140 h | 15 m |
| | Turbo | 1500 lm | 2 h 30 | | 200 m |
| | High | 800 lm 350 lm | | | 140 m |
| E28R | Med | | 6 | | 90 m |
| | Low | 150 lm | 17 h 1 | | 61 m |
| | Eco | 30 lm | 73 h 3 | , | 28 m |
| | Strobe | 1500 lm | 1 h 20 | | / 202 m |
| | Turbo | 1600 lm 800 lm | 1 h 50 | | 203 m |
| | High | | | | 150 m |
| E30R | Med | 350 lm | 5 | | 93 m |
| | Low | 150 lm | 17 | | 62 m |
| | Eco | 30 lm | | | 27 m |
| | Strobe | 1600 lm | 1 h 11 | | 240 m |
| | Turbo | 3000 lm | 1 h 15 | | 240 m |
| | High | 1200 lm | 2 h 40 | | 150 m |
| E35 V3.0 | Med | 450 lm | 7 | | 90 m |
| | Low | 150 lm | 20 | | 50 m |
| | Eco | 50 lm | 50 | | 30 m |
| | Strobe | 3000 lm | / | | / |

| МС | DEL | OUTPUT | RUNT | ГІМЕ | DISTANC |
|-----------|------------------|---------------|------------------|-------------|---------|
| | High | 150 lm | 1 h 40 |) min | 40 m |
| | Med | 45 lm | 4 h 20 |) min | 22 m |
| | Low | 5 lm | 20 | h | 9 m |
| E-LITE | Red | 3 lm | 8 | h | 7 m |
| | Red Flash | 3 lm | 22 | 7 m | |
| | Blue | 3 lm | 8 | 7 m | |
| | Blue Flash | 3 lm | 22 | 7 m | |
| | Turbo | 100 lm | , | 40 m | |
| | High | 20 lm | 10 | h | 18 m |
| E-STAR | Med | 3 lm | 60 h | /∞ | 7 m |
| | Low | 1 lm | 120 | 1 /∞ | 4 m |
| | | | Alkaline Battery | | |
| | High | 70 lm | 40 min | 45 min | 48 m |
| LD02 V2.0 | Med | 25 lm | 2 h 40 min | 2 h 55 min | 27 m |
| | Low | 1 lm 200mW | 75 h 4 h | 45 h 4 h | 6 m |
| | UV Light | 20011100 | Alkaline Battery | | / |
| | High | 100 lm | 1 h 40 min | 2 h 10 min | 54 m |
| LD05 V2.0 | Med | 25 lm | 7 h 50 min | 6 h 40 min | 27 m |
| | Low | 5 lm | 70 h | 36 h | 22 m |
| | UV Light | 200mW | 9 h | 7 h | / |
| LD15R | Turbo | 500 lm | 1 h 20 | | 85 m |
| | White Ligh Med | 150 lm | 2 h 50 | | 46 m |
| | 7 | 30 lm | 13 h 2 | | 23 m |
| | Low | 3 lm | 110 | 6 m | |
| | Red Light Signal | 4 lm | 30 | h | 5 m |
| | Signal Signal | 4 lm | / | | / |
| | SOS | 4 lm | / | / | |
| | Turbo | 1600 lm | 1 h 25 | 205 m | |
| | High | 800 lm | 1 h 50 | 150 m | |
| | Med | 350 lm | 5 h 20 | 95 m | |
| LD30 | Low | 150 lm | 17 h 1 | 0 min | 60 m |
| | Eco | 30 lm | 70 | h | 25 m |
| | Strobe | 1600 lm | / | 1 | / |
| | SOS | 30 lm | / | 1 | / |
| | High | 1200 lm | 2 h 40 |) min | 395 m |
| DD22 V2 0 | Med | 350 lm | 5 h 20 |) min | 218 m |
| PD32 V2.0 | Low | 30 lm | 82 | . h | 55 m |
| | Strobe | 1200 lm | / | 1 | / |
| | Turbo | 1700 lm | 1 h 25 | 5 min | 357 m |
| | High | 600 lm | 2 h 35 | 5 min | 216 m |
| DD2=::- | Med | 150 lm | 8 h 30 | | 109 m |
| PD35 V3.0 | Low | 50 lm | 26 h 2 | | 63 m |
| | Eco | 5 lm | | 0 h | 20 m |
| | Strobe | 1700 lm | | , | / |

| МО | DEL | OUTPUT | RUN' | ГІМЕ | DISTANCE | |
|-----------|-----------------------|-------------------|--------------|--------------|----------|--|
| | Turbo | 1600 lm | 2 h 50 |) min | 283 m | |
| | High | 800 lm | 5 h 49 |) min | 197 m | |
| DD2CD | Med | 350 lm | 8 h 24 | 128 m | | |
| PD36R | Low | 150 lm | 26 | 82 m | | |
| | Eco | 30 lm | 115 | 5 h | 35 m | |
| | Strobe | 1600 lm | , | / | | |
| | High | 2000 lm | 3 h 10 |) min | 225 m | |
| | Strobe | 2000 lm | , | 1 | / | |
| | Turbo | 3000 lm | 1 h 30 |) min | 274 m | |
| | High | 1000 lm | 3 h 1 | 5 min | 160 m | |
| PD36 TAC | Duty Med Low | 350 lm | 10 h 1 | 0 min | 92 m | |
| | low Low | 150 lm | 18 h 4 | 5 min | 59 m | |
| | Eco | 30 lm | 43 h 1 | 0 min | 25 m | |
| | Strobe | 2000 lm | , | 1 | / | |
| | Turbo | 3000 lm | 2 h 40 |) min | 405 m | |
| | High | 1000 lm | 3 h 10 | | 230 m | |
| PD40R | Med | 350 lm | 8 h 30 |) min | 137 m | |
| V2.0 | Low | 30 lm | 88 h 1 | 0 min | 45 m | |
| | Strobe | 2500 lm | | / | | |
| | Turbo | 1000 lm | 2 h 5 | 2 h 5 min | | |
| | High | 350 lm | 4 | | 160 m | |
| | Med | 150 lm | 9 h 5! | | 98 m | |
| UC35 V2.0 | Low | 50 lm | 27 h 5 | | 64 m | |
| | Moonlight | 1 lm | 750 | | 10 m | |
| | Strobe | 1000 lm | , | | / | |
| | Tactica High | 1600 lm | 2 | 335 m | | |
| | Strobe | 1600 lm | | | / | |
| | High | 1600 lm | 2 | | 335 m | |
| TK11 TAC | | 500 lm | 4 h 30 | 195 m | | |
| | Med Low | 50 lm | 47 h 3 | 60 m | | |
| | Strobe | 1600 lm | , , , , | , | / | |
| | Turbo | 3100 lm | 2 h 40 | | 380 m | |
| | High | 100 lm | 2 h 50 | | 220 m | |
| | Med | 350 lm | 8 h 20 | | 125 m | |
| TK16 V2.0 | Low | 150 lm | 19 h 1 | | 80 m | |
| | Eco | 30 lm | 43 h 2 | | 40 m | |
| | Strobe | 3100 lm | / | | / | |
| | | | 21700 | 18650 | | |
| | Turbo | 1600 lm | 2 h 10 min | 1 h 30 min | 405 m | |
| TK22UE | High | 500 lm | 4 h 40 min | 3 h | 231 m | |
| THEZUL | Med Low | 150 lm 30 lm | 17 h 80 h | 15 h 60 h | 122 m | |
| | LOW | | / | / | 51 m | |
| | Strobe | 1600 lm | | | | |
| | Strobe High | 1600 lm 500 lm | , | - | | |
| TK30 | Strobe High Low | 500 lm 100 lm | 3 | h | 1200 m | |

| M | MODEL | | OUTPUT | RUNTIME | DISTANCE | |
|---------|-----------------|-----------|----------|-------------|----------|--|
| | | Turbo | 1500 lm | 1 h 15 min | 350 m | |
| | | High | 350 lm | 4 h 27 min | 170 m | |
| | | Med | 150 lm | 10 h 18 min | 110 m | |
| TK26R | | Low | 10 lm | 100 h | 30 m | |
| | | Strobe | 1500 lm | / | / | |
| | F | Red Light | 150 lm | 4 h 10 min | 30 m | |
| | Gı | een Light | 200 lm | 5 h | 40 m | |
| | Tactic | Tactical | 3500 lm | 1 h 50 min | 320 m | |
| | al Mod | Strobe | 3500 lm | / | / | |
| | -ro | Turbo | 5000 lm | 1 h 40 min | 400 m | |
| TK35UE | | High | 2000 lm | 2 h | 250 m | |
| V2.0 | Duty Mode | Med | 800 lm | 4 h | 160 m | |
| | lode | Low | 350 lm | 13 h 40 min | 100 m | |
| | | Eco | 30 lm | 85 h | 32 m | |
| | | Strobe | 3500 lm | / | / | |
| | | Turbo | 10000 lm | 1 h 25 min | 500 m | |
| | | High | 3000 lm | 1 h 35 min | 270 m | |
| | | Med | 1200 lm | 3 h 15 min | 170 m | |
| LR35R | | Low | 450 lm | 8 h 20 min | 105 m | |
| | | Eco | 50 lm | 80 h | 30 m | |
| | | Strobe | 10000 lm | / | / | |
| | Sp | High | 1000 lm | 7 h | 640 m | |
| | otligi | Med | 350 lm | 22 h 30 min | 401 m | |
| | nt Mo | Low | 150 lm | 44 h 31 min | 263 m | |
| | de | Eco | 50 lm | 92 h 18 min | 163 m | |
| | | Turbo | 11000 lm | 45 min | 410 m | |
| LR40R | | High II | 6000 lm | 2 h | 295 m | |
| | Floo | High I | 3000 lm | 2 h 50 min | 200 m | |
| | Floodlight Mode | Med | 1000 lm | 7 h 15 min | 115 m | |
| | t Moc | Low | 350 lm | 22 h 44 min | 65 m | |
| | de | Strobe | 3000 lm | / | / | |
| | | SOS | 350 lm | / | / | |
| | | Turbo | 12000 lm | 1 h 50 min | 950 m | |
| | Ge | High II | 6000 lm | 2 h 20 min | 690 m | |
| | General Mode | High I | 3000 lm | 2 h 40 min | 480 m | |
| | Mod | Med | 1000 lm | 7 h 40 min | 280 m | |
| LR50R | е | Low | 350 lm | 24 h | 165 m | |
| | | Eco | 50 lm | 58 h | 70 m | |
| | Func | Turbo | 12000 lm | 1 h 50 min | 950 m | |
| | Functional | Strobe | 6000 lm | / | / | |
| | Mode | SOS | 350 lm | / | / | |
| | | Turbo | 18000 lm | 2 h | 1130 m | |
| | General Mode | High | 12000 lm | 2 h 15 min | 920 m | |
| LR80R | al Mo | Med | 6000 lm | 2 h 50 min | 650 m | |
| LINOOIN | de | Low | 3000 lm | 5 h 10 min | 465 m | |

FENIX PRODUCTS SPECIFICATION CHART

| МС | DDI | L | OUTPUT | | RUNT | IME | | DISTANCE |
|---------|----------------------------------|-----------------|---------|------------------|-------------|------|------------------|--------------|
| | | High | 1000 lm | 1 | .5 h 40 |) mi | n | 265 m |
| | Fun | Med | 450 lm | | 39 | h | | 175 m |
| LR80R | Functional Mode | Low | 150 lm | | 92 | h | | 105 m |
| | al Mo | Eco | 50 lm | | | 50 m | | |
| | de | Strobe | 6000 lm | | | / | | |
| | | SOS | 150 lm | | | / | | |
| | | High | 85 lm | | 11. | 5 h | | 54 m |
| WF05E | | Med | 30 lm | | 35 | h | | 29 m |
| | | Low | 10 lm | | 80 | h | | 18 m |
| | | High | 200 lm | | 10 | h | | 185 m |
| WF11E | | Med | 100 lm | | 29. | 5 h | | 141 m |
| | | Low | 30 lm | | 70 | h | | 81 m |
| | | High | 280 lm | | 6 h 50 |) mi | n | 170 m |
| WF30RE | | Med | 120 lm | : | L5 h 4 | 0 m | in | 120 m |
| WISONE | | Low | 30 lm | | 120 |) h | | 58 m |
| | _ | Strobe | 280 lm | | / | , | | / |
| | Spc | High | 300 lm | | 3 h 50 |) mi | n | 115 m |
| | Spotlight Mode Floodlight Mode | Med | 100 lm | | 9 h 20 |) mi | n | 65 m |
| WT16R | Mode | Low | 30 lm | | 30 | h | | 35 m |
| WITOK | Flood | High | 300 lm | | 3 h 50 |) mi | n | 23 m |
| | light M | Low | 100 lm | | 9 h 20 |) mi | n | 14 m |
| | ode | Yellow Flash | 10 lm | | / | , | | / |
| | | Turbo | 1000 lm | | 3 h 40 | | n | 220 m |
| | Gener | High | 400 lm | | 4 h 50 | | | 145 m |
| WT25R | General Mode | Med | 150 lm | | 11 | | | 85 m |
| WIZJK | | Low | 50 lm | | 29 | h | | 50 m |
| | Fla | Strobe | 1000 lm | | / | , | | / |
| | Flash Mod | SOS | 50 lm | | / | | | / |
| | е | | | Li- | Alkal | line | Ni-MH Battory | |
| | | Turbo | 400 lm | polymer 8.5 h | Batt 9 I | | Battery 9 h | 76 m |
| | Spot | High | 130 lm | 12.5 h | 14 | | 14 h | 40 m |
| | ight N | Med | 70 lm | 17.5 h | 22 | h | 22 h | 30 m |
| HL18R | /lode | Low | 30 lm | 48 h | 48 | | 48 h | 20 m |
| | Floo | High | 30 lm | 54 h | 56 | h | 56 h | 10 m |
| | dlight | Low | 4 lm | 145 h | 150 | h | 150 h | 5 m |
| | Spotlight Mode Floodlight Mode F | sos | 30 lm | 72 h | 80 | h | 80 h | 6 m |
| | Spot | ∐iah | 500 lm | Li-polyr | | | AAA 4 b | 92 m |
| | llight | High Med | 200 lm | 3 h 8 h | | | 4 h 11 h | 82 m 54 m |
| HL18R-T | Mode | Low | 70 lm | 20 h | | | 20 h | 35 m |
| | Flood Mode | Low | 30 lm | 30 h | 1 | | 43 h | 12 m |
| | Low SOS | | 4 lm | 300 | h | | | 5 m |

| М | DDEL | OUTPUT | RUNTIME | DISTANCE | | |
|-------|-------------------|-------------------|------------|-------------------------------------|--|--|
| | Turbo | 300 lm | 4.5 h | 49 m | | |
| | ନ୍ତ High | 130 lm | 14 h | 34 m | | |
| | General Med Low | 70 lm | 24 h | 23 m | | |
| HL32R | Mode Low | 30 lm | 60 h | 16 m | | |
| | Eco | 4 lm | 200 h | 7 m | | |
| | हुँ Red Lig | ht 1 lm | 100 h | 4 m | | |
| | Red Lig SOS | | 120 h | 16 m | | |
| | Red Fla | sh 1 lm | 200 h | 4 m | | |
| | Burst | 600 lm | 1 h | 73 m | | |
| | ରୁ High | 300 lm | 4 h 30 min | Spotlight Flood- light 96 m 29 m | | |
| | General Mode | | 11 h | 64 m 19 m | | |
| | Low | 70 lm | 22 h | 46 m 14 m | | |
| HL40R | Eco | 30 lm | 50 h | 30 m 9 m | | |
| | Readi | ng 4 lm | 200 h | 10 m 4 m | | |
| | SOS | 30 lm | 100 h | 30 m 9 m | | |
| | Burst | 600 lm | 1 h 20 min | 147 m 43 m | | |
| | Burst | 950 lm | 48 min | 116 m | | |
| | High | 400 lm | 3 h | 76 m | | |
| | Med | 150 lm | 10 h | 46 m | | |
| HL60R | Low | 50 lm | 29 h | 27 m | | |
| | Eco | 5 lm | 100 h | 8 m | | |
| | Red | 1 lm | 100 h | / | | |
| | High | 240 lm | 8 h | 63 m | | |
| HM23 | Med | 70 lm | 16 h | 34 m | | |
| | Low | 4 lm | 100 h | 9.5 m | | |
| | € Turbo | 700 lm | 1 h | 115 m | | |
| | High | 400 lm | 3 h | 86 m | | |
| HM50R | ight Med | 130 lm | 8 h | 49 m | | |
| V2.0 | Low | 30 lm | 42 h | 23 m | | |
| | Red Lig | | 60 h | 6 m | | |
| | Red Fla | -71111 | 120 h | 6 m | | |
| | Turbo | | 2 h | 145 m | | |
| | White Ligh | | 4 h | 80 m | | |
| | | | 12 h | 50 m | | |
| HM61R | Low | | 35 h | 8 m | | |
| | Eco | 5 lm | 300 h | 8 m | | |
| | Low Red Li Med | | 400 h | / | | |
| | <u>e</u> | | 80 h | / | | |
| | Red Fla | | 160 h | / | | |
| | Spotli: | | 4 h | 163 m | | |
| HM65R | ght High | n 400 lm 22 h 101 | | | | |
| | Med Med | 130 lm | 42 h | 57 m | | |

| MODEL | | ОИТРИТ | RUNTIME | DISTANCE | | |
|---------------|-----------------|------------|-----------|----------|-------|-------|
| | | | Low | 50 lm | 90 h | 37 m |
| HM65R | Flood | | High | 400 lm | 20 h | 55 m |
| TIMOSK | Floodlight Mode | | Med | 130 lm | 48 h | 30 m |
| | Mode | | Low | 8 lm | 280 h | 6 m |
| | Ge | | Turbo | 1600 lm | 4 h | 186 m |
| | General | | High | 500 lm | 6 h | 105 m |
| | ıl Mode | | Med | 150 lm | 30 h | 53 m |
| HM70R | de | Low | | 30 lm | 100 h | 26 m |
| HMITUR | Fun | Red Light | | 5 lm | 400 h | 5 m |
| | Functional Mode | Med | | 70 lm | 48 h | 16 m |
| | nal M | High | | 400 lm | 8 h | 38 m |
| | ode | | Red Flash | 5 lm | 800 h | 5 m |
| | Spot | | High | 1300 lm | 4 h | 170 m |
| | Spotlight Mode | Med | | 400 lm | 12 h | 96 m |
| HM65R-T | | | Low | 130 lm | 24 h | 55 m |
| | Flood | | High | 400 lm | 12 h | 54 m |
| | Floodlight Mode | Med | | 70 lm | 33 h | 23 m |
| | Mode | | Low | 5 lm | 300 h | 6 m |
| | Ge | | Turbo | 1250 lm | 4 h | 225 m |
| | General Mode | | High | 400 lm | 8 h | 149 m |
| | i Mo | Spotlight | Med | 150 lm | 12 h | 88 m |
| | de | | Low | 50 lm | 36 h | 52 m |
| HP16R | _ | | High | 400 lm | 8 h | 48 m |
| | -unc | Floodlight | Med | 150 lm | 12 h | 30 m |
| | iona | ght | Low | 5 lm | 300 h | 6 m |
| | Functional Mode | 7 | Red Light | 5 lm | 300 h | 6 m |
| | | | Red Flash | 5 lm | 600 h | 6 m |
| | | | Turbo | 1600 lm | 2 h | 290 m |
| | General Mode | | High | 1000 lm | 4 h | 228 m |
| | eral N | Spotlight | Med | 400 lm | 8 h | 140 m |
| | lode | ght | Low | 150 lm | 24 h | 83 m |
| HP25R | | | Eco | 50 lm | 56 h | 59 m |
| V2.0 | Fu | Flo | High | 400 lm | 8 h | 50 m |
| | | oodlight | Med | 150 lm | 24 h | 30 m |
| | nal N | ht | Low | 5 lm | 400 h | 8 m |
| | ctional Mode | Red | Red Light | 5 lm | 400 h | 6 m |
| | עו | | Red Flash | 5 lm | 800 h | 6 m |
| | S | | Turbo | 2000 lm | 6 h | 251 m |
| | Spotlight Mode | High | | 800 lm | 12 h | 156 m |
| HP30R V3.0 | tht Mo | Med | | 200 lm | 34 h | 78 m |
| | de | Low | | 50 lm | 120 h | 42 m |
| | 끄 | | | 1000 lm | 10 h | |
| | Floodlight Mode | High | | | | 78 m |
| | tht Mo | Med | | 200 lm | 34 h | 34 m |
| | ode | Low | | 50 lm | 120 h | 17 m |
| | Spot | | Turbo | 3000 lm | 5 h | 270 m |
| | Spot&Flood Mode | | High | 1800 lm | 6 h | 177 m |
| | d Mo | | Med | 400 lm | 17 h | 85 m |
| | de | | Low | 100 lm | 60 h | 45 m |

| High Flash(Flash) 15 lm 35 h High Flash(Slow) 15 lm 25 h 100 m | M | ODEL | OUTPUT | RUNTIME | | DISTANCE | |
|--|-----------|------------------|-------------|------------|---|-----------|--|
| High 15 lm 4.5 h 120 h 16 lm 16 h 16 lm 15 lm 120 h 10 lm 15 lm 16 h 10 lm 15 lm 16 h 10 lm 15 lm 16 lm | | High Flash(Fast) | 15 lm | 35 l | า | | |
| V2.0 | | High Flash(Slow) | 15 lm | 25 h | | 1 | |
| V2.0 | | High | 15 lm 4.5 h | | h | 50 m | |
| Solim 16 h 106 m 106 m | | Low Flash(Fast) | 5 lm | 80 h | | | |
| Turbo 600 lm 2 h 106 m High 350 lm 7 h 79 m Med 150 lm 15 h 53 m Low 50 lm 36 h 32 m Flash 150 lm / 161 m High 1000 lm 2 h 40 min 122 m Med 400 lm 7 h 20 min 76 m Eco 50 lm 36 h 28 m Flash 150 lm / Eco 50 lm 36 h 28 m Flash 150 lm / Eco 50 lm 36 h 28 m Flash 150 lm / High 1500 lm 2.3 h 155 m Med 600 lm 6 h 96 m Low 200 lm 16 h 56 m Eco 50 lm 50 h 28 m Flash 600/50 lm / / Turbo 300 lm 6 h High 130 lm 12 h Low 1 lm 200 h Red Flash 1.5 lm / Red 1.5 lm 100 h High 400 lm 5 h Med 400 lm 30 h Front 25 lm 58 h Red 1 lm 200 h Red Flash 1 lm 400 h Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h Med 100 lm 38 h 51 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h Turbo 50 lm 70 h 93 h Eco 10 lm 300 h 400 h Turbo 50 lm 70 h 93 h Eco 10 lm 300 h 400 h Turbo 650 lm 70 h 93 h Eco 10 lm 300 h 400 h | | Low Flash(Slow) | 5 lm | | | | |
| High 350 lm 7 h 79 m | | Low | 5 lm | | | | |
| BC25R | BC25R | Turbo | 600 lm | 2 h | | 106 m | |
| Low 50 lm 36 h 32 m | | High | 350 lm | 7 h | | 79 m | |
| Flash | | Med | 150 lm | 15 h | | 53 m | |
| SC30R SC30R SC30R SC30R SC30R SC30R Sc30 S | | Low | 50 lm | 36 h | | 32 m | |
| High 1000 lm 2 h 40 min 122 m 76 m 76 m 76 m 150 lm 16 h 10 min 47 m 28 m 7 h 20 min 76 m 150 lm 16 h 10 min 47 m 28 m 7 h 20 min 76 m 17 h 20 min 47 m 187 m 18 | | Flash | 150 lm | / | | / | |
| ECO 50 lm 36 h 28 m Flash 150 lm | | | 1800 lm | / | | 161 m | |
| ECO 50 lm 36 h 28 m Flash 150 lm | BC30R | High | | | | | |
| ECO 50 lm 36 h 28 m Flash 150 lm | | ae Med | | | | | |
| Flash 150 lm | 2017 | | | | | | |
| Burst 2200 lm | | | | | | | |
| High | | | | | | , | |
| Med 600 lm 6 h 96 m 16 h 56 m Eco 50 lm 50 h 28 m / | | | | , | | | |
| Low 200 lm 16 h 56 m | | | | | | | |
| Eco 50 lm 50 h 28 m Flash 600/50 lm / / Turbo 300 lm 6 h High 130 lm 12 h Med 40 lm 200 h Low 1 lm 200 h Red Flash 1.5 lm / Red 1.5 lm 100 h High 400 lm 5 h Low 40 lm 30 h Front 25 lm 58 h Down l 3 lm 240 h Down ll 25 lm 58 h Red 1 lm 200 h Red Flash 1 lm 400 h Turbo 650 lm 4h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | BC30 V2.0 | | | | | | |
| Flash 600/50 lm | | | | | | | |
| CL20R Turbo 300 lm 6 h | | | | | | | |
| CL20R High 130 lm 12 h Med 40 lm 20 h Low 1 lm 200 h Red Flash 1.5 lm / Red 1.5 lm 100 h High 400 lm 5 h Med 150 lm 15 h Low 40 lm 30 h Front 25 lm 58 h Down I 3 lm 240 h Down II 25 lm 58 h Red 1 lm 200 h Red Flash 1 lm 400 h Turbo 650 lm 4h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | | * | | | / | |
| Red Flash 1.5 lm | | | | | | | |
| Red Flash 1.5 lm | | High | | | | 15m (Max) | |
| Red Flash 1.5 lm | CL20R | Med | | | | | |
| Red | | LOW | | | | | |
| CL26R High 400 lm 5 h Med 150 lm 15 h Low 40 lm 30 h Front 25 lm 58 h Down I 3 lm 240 h Down II 25 lm 58 h Red 1 lm 200 h Red Flash 1 lm 400 h Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | | | , | | | |
| CL26R Med 150 lm 15 h | | Tode Red | 1.5 lm | 100 h | | | |
| CL26R | | High | 400 lm | 5 h | | 25m (Max) | |
| CL26R Front 25 lm 58 h 25m (Max) Down I | CL26R | Med | 150 lm | 15 h | | | |
| CL26R Down I 3 lm 240 h Down II 25 lm 58 h Red 1 lm 200 h Red Flash 1 lm 400 h CL30R Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 70 h 93 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | Low | 40 lm | 30 h | | | |
| Down I 3 lm 240 h | | Front | 25 lm | 58 h | | | |
| Red 1 lm 200 h Red Flash 1 lm 400 h CL30R Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 38 h 51 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | Down I | 3 lm | 240 h | | | |
| Red Flash 1 lm 400 h CL30R Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h Low 50 lm 70 h 93 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | Down II | 25 lm | 58 h | | | |
| CL30R | | Red | 1 lm | 1 lm 200 h | | | |
| Turbo 650 lm 4 h 30 min 6 h High 350 lm 9 h 12 h CL30R Med 100 lm 38 h 51 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | Red Flash | 1 lm | 400 h | | | |
| CL30R High 350 lm 9 h 12 h Med 100 lm 38 h 51 h Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | CL30R | Turbo | 650 lm | | | | |
| CL30R Med 100 lm 38 h 51 h 35m (Max) Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | | | | | 1 | |
| Low 50 lm 70 h 93 h Eco 10 lm 300 h 400 h | | | | | | 35m (Max) | |
| Eco 10 lm 300 h 400 h | | | | | | | |
| | | | | | | 1 | |
| | | | 100 lm | | | | |

CUSTOMER SERVICE

15 Days Free Replacement

15 days free replacement: Fenix will replace a new product within 15 days of purchase for any manufacturing defects if problems come into being in normal use; We will replace it with the same model. If the model has been discontinued, customers will receive a product with similar or improved model.

5 Years Free Repair

5 years free repair: Fenix will offer free repair within 5 years for lights from the date of purchase if problem develops with normal use. Different warranty period for different products:

| Product Type | Warranty |
|--|------------------------------|
| Flashlights,tactical lights, headlamps, bicycle lights, camping lanterns (included rechargeable lights but not built-in battery) | 5 years (battery for 1 year) |
| Flashlights,tactical lights, headlamps, bicycle lights, camping lanterns(with built-in battery) | 2 years (battery included) |
| Rechargeable batteries, chargers, bike mount, and remote pressure switch | 1 year |

Limited Lifetime Warranty

Limited lifetime warranty: For lights past the free repair warranty period, we provide lifetime repairs but will charge for parts. The distributor will notify customer the cost of the part before repair.

Extended warranty service

Extra 6-month warranty period is obtained once you have successfully registered on the official website for Fenixlight Limited (www.fenixlight.com), which only applies to flashlights, tactical lights, headlamps, bike lights and camping lanterns.

Warranty Certificate

Customers requesting after-sales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

The free warranty does not cover any damages or failure caused by:

- (1) Normal wear
- (2) Rough operation
- (3) Battery leakage
- (4) Any defects or damages caused by the improper operations include but not limited to the operation which doesn't comply with the warranty or notes shown in the product specification. For example, the product specification will describe that please don't disassemble the sealed head, as doing so can damage to the flashlight and will void the warranty'
- (5) Any defects or damaged led by other behaviors which can not be controlled by Fenix reasonably.

For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions) service_1@fenixlight.com (Asia/Oceania/Africa regions) Tel: +86 400 8866 093 / +86 755 2963 1193

