

### FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-2963118

2F/3F, West of Building A, Xinghong Technology Park, 111 Shuiku Road, Fenghuanggang Community, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province, China

61.599.991.008-A1-2022120





# BRAND OVERVIEW

Founded in 2001, Fenix has developed into a China national high-tech enterprise, specializing in R&D, manufacturing and selling of mobile lighting tools, including flashlights, tactical lights, headlamps, bicycle lights, camping lanterns and lighting accessories. Fenix products are widely used in the following environments: outdoor sports, industrial, law enforcement, military, EDC (everyday carry), etc.

Fenix products are now being sold in more than 100 countries around the world, reaching tens of millions of users worldwide. Concentrating on the development of LED lighting tools of high performance and reliability, Fenix has won recognition and praise from users for its excellent products and service. Fenix has become known worldwide as a premium LED lighting brand based on each product's excellent performance and reliable quality.

The best design is derived from the actual needs of users. Fenix aims to satisfy customers' pursuit of versatile, mobile lighting products. With the mission of "Lighting For Extremes", Fenix is committed to becoming the world's No.1 mobile lighting brand.

2001

**ESTABLISHMENT** 


100+

COUNTRIES AND REGIONS

10M+

**CONSUMER USERS** 

# **BRAND HONOR**

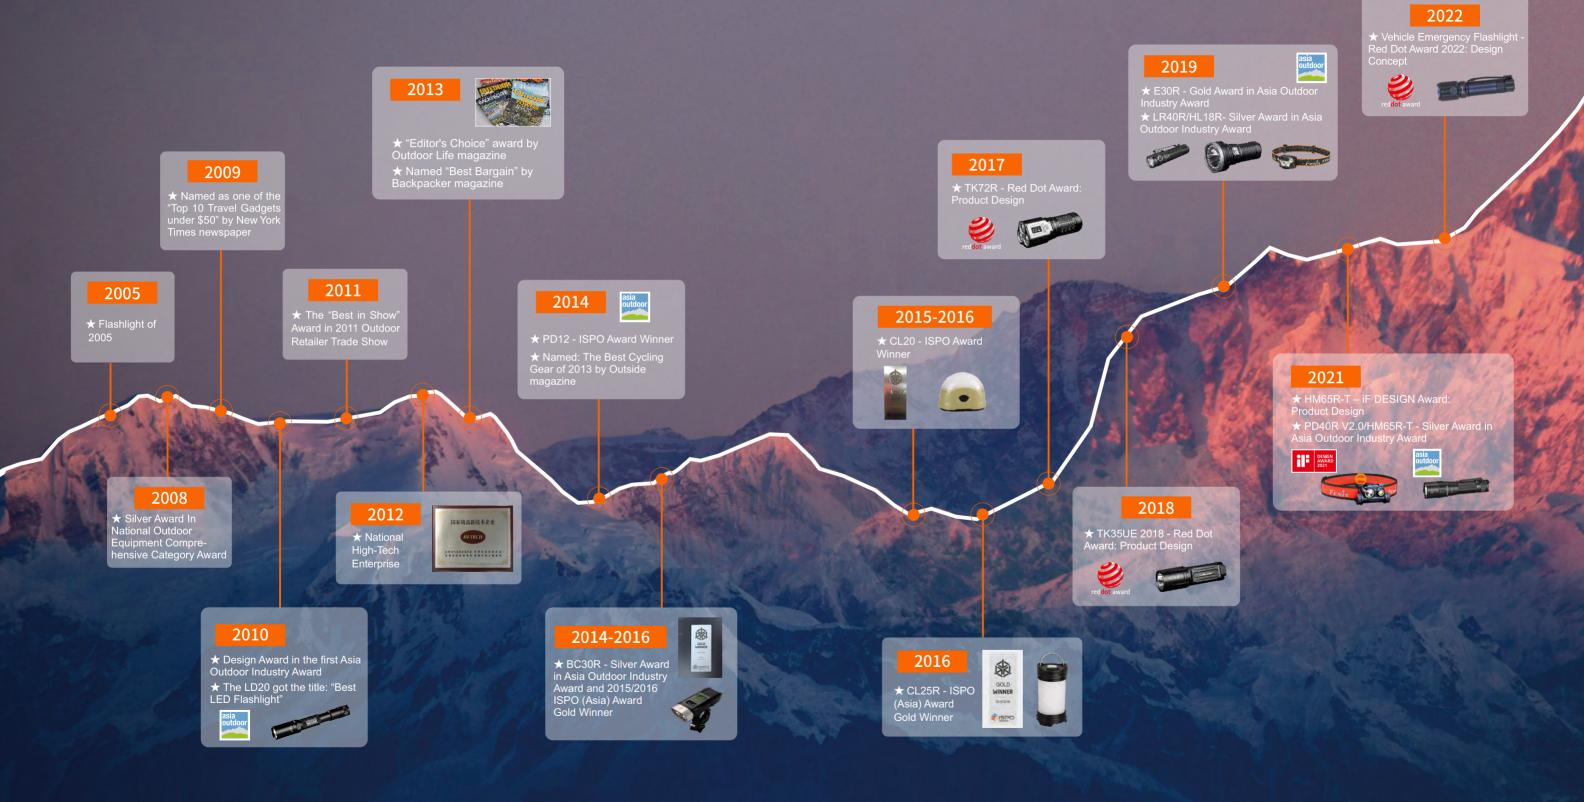

WORLDWIDE SALES NETWORK

### 2005-2008

Fenix products entered the United States, Germany, Netherlands, Finland, Switzerland, Canada, Thailand, Denmark, Britain, Italy, France, Hong Kong, South Korea, Russia, Japan, Taiwan, Singapore, Malaysia, South Africa, Australia, etc.

### 2009-2013

Fenix products continued to expand the map, entering Saudi Arabia, Indonesia, Sweden, Norway, India, Czech Republic, Israel, UAE, Poland, Vietnam, Kazakhstan, Brazil, Spain and other markets.

### **Since 2014**

Fenix products have been in more than 100 countries and regions around the world, and the sales network has achieved a global layout.





### Fenix products are now being sold in many mainstream sales channels in domestic and overseas.

- 3 REI The world's largest outdoor chain channel.
- © Grainger The largest industrial chain channel in the United States. Dick's Sporting Goods The largest outdoor chain channel in the United States. Sportsman's Warehouse Outdoor sporting goods retailer. Galls Leading chain store of public safety equipment and uniforms.
- OGlobetrotter Germany's most influential outdoor chain channel. Frankonia The largest hunting chain channel. MediaMarket The largest multinational chain of stores selling consumer electronics.
- MEC Canada's largest outdoor chain channel.
- OPARTIOAITTA A well-known Finnish outdoor chain channel.
- Bever The largest outdoor chain channel in the Netherlands
- Tiexuejunpinxing China's most well-known military product chain store. Sanfu Outdoor the largest outdoor chain channel. Firefox Outdoor, Zhongjiahe Outdoor, etc.
- OPROTrek The largest outdoor chain channel in Hong Kong, China.





























### LIGHTING FOR EXTREMES

### Harsh Environment Tests

Fenix products are tested in accordance with international ANSI standards. All products withstand more than 30 rigorous tests including high-strength water immersion, dust proofing, impact resistance, high and low temperature, etc. All these ensure that Fenix products can pass the tests of various conditions or harsh environments and provide users with secure and reliable lighting.



In order to verify the performance of the product after a drop, 3-5 samples will be randomly selected to perform a 1.5-meter drop test on 6 sides\*. After 6 drops, the product still needs to pass a waterproof test to ensure that the function of the tested product is not in any way hindered, and it must have no cracks or damage.

\*The drop height for a flashlight is 1.5 meters, and for a headlamp 2 meters.

In order to verify the high and low-temperature resistance of the product structure, 5 samples will be randomly selected and placed in a humidity cabinet for half an hour at -35°C, then it will be quickly transferred to an oven for half an hour at 70°C. This operation will be repeated 5 times. No damage to or deformation of the appearance and structure of the product must be visible for it to pass the test.

In order to verify the waterproof performance of a product, 10 samples will be randomly selected and subjected to a drop test after being immersed in 2 meters of water for 30 minutes. After the test, the product is continuously immersed in 2 meters of water for 4 hours. Before and after the test the product must function normally and no water seepage must be evident for it to pass the waterproof test.

In order to verify the service life of product switches, 3 samples will be randomly selected of which the switches will be clicked a total of 10,000 times. After the test, the product must function normally, with good hand feeling and sensitivity, and a normal clicking of 2 times per second qualifies it to pass this test.

# LIGHTING FOR EXTREMES

### The Ultimate Pursuit Of Technological Innovation

Fenix always pursues advanced industry technology and constantly creates innovative lighting products. So far, we have hundreds of technology patents that are widely used in various lighting products, from a mini keychain flashlight to a sturdy headlamp, which can all confirm Fenix's firm footsteps in exploration and innovation.


### **INNOVATIVE APF TECHNOLOGY SYSTEM MAKES SUPER TACTICAL FLASHLIGHT**

Fenix's innovatively developed APF Technology System\* uses a single layer to achieve simultaneous transmission of working current and signals control, completely breaking the shackles of the tactical flashlight by the tail switch, while still achieving the tactical requirements and applications for flashlights. such as small size, high brightness, and anti-interference.

Utility Model Patent ZL 201920500579.6

The brightness is no longer limited by the current withstand capability of the tactical switch, easily reaching or even exceeding 3000 lumens, giving full play to the advantages of LEDs.

The single-layer body and single-polarity battery are used to complete current transmission and signal control, making smaller light sizes and more battery use possibilities.

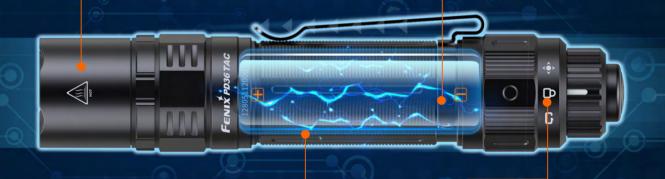

Complex external environments such as strong magnetic fields are easily dealt with through stronger anti-interference ability, so the flashlight can be used with confidence.

Through the pulse-frequency transmission system, it makes the multi-switch and multifunction combination of tactical operation and output selection can be achieved.

\* The APF (Advanced Pulse-frequency Transmission System) was developed by Fenix Laboratory for producing better flashlights. This has allowed the abandonment of traditional development by breaking through the technology bottleneck, allowing the flashlight with a tail switch to achieve a higher level

### **UOL - ULTRA - THIN OPTICAL LENS**

Fenix's first 3.5mm UOL (Ultra-thin Optical Lens), adds an aluminum-silicon reflective coating to the unique lens structure, to accomplish the reflection and double refraction of the light emitted by the light source. This design makes a slimmer lens

In addition, compared with the conventional 10mm lens, the UOL can produce better light efficiency and successfully reduce the volume and weight of the flashlight, while making the flashlight more portable and convenient to use.

Utility Model Patent ZL 201820183805.8

# FARTHER



With the same thickness, the ultra-thin optical lens has an 86% increase in beam distance when compared with conventional lenses.

### **THINNER**



With the same beam distance, the thickness of the ultra-thin optical lens is about 60% thinner than the conventional lenses.



### **IOP - INTELLIGENT OVERHEAT PROTECTION**

LED flashlights mostly use high-power LED light-emitting bodies with batteries. In order to meet lighting needs, they often use high-power constant circuit output to supply power. However, due to the small size of the flashlight, long-term high-power lighting will cause the flashlight to become very hot, resulting in the risk of burns.

To overcome this problem, Fenix has created the IOP (Intelligent Overheat Protection). This system applies an integrated circuit system that limits the maximum current input and controls the real-time temperature, which allows the flashlight to automatically reduce its power when the temperature is too high, and to achieve intelligent cooling, thereby protecting the user, reducing safety risks, and relatively extending the runtime for longer lighting\*.

Utility Model Patent ZL 201821879647.6

### Not burning if less than 60°

When the surface of the flashlight reaches the warning temperature before 60°, the IOP will be activated to ensure that the surface of the flashlight will not exceed 60°, and there will be no obvious feeling of hotness.

### Sensitive and self-control

Without intervention, after the surface temperature of the flashlight decreases, the power and brightness will be automatically



### SPORT SECURE PERFORMANCE FOR OUTDOOR **RUNNING AND TRAIL HEADBAND FIT SYSTEM**

Headlamps are essential outdoor gear. In addition to brightness, runtime and waterproofness, simple and quick adjustment of the headband is also a primary concern for most users. The traditional headband uses a buckle to adjust the length, and it is extremely inconvenient to use as both hands are needed to adjust the headband.

Fenix has now broken the limitation of conventional headband adjustment by applying the SPORT Fit System to the headband adjustment, which has been the perfect solution to this problem. The SPORT Headband Fit System is fitted with a button structure. The length of the headband can be adjusted by rotating the button to tighten/loosen the pulling rope fixed on the headband, which provides convenient and flexible adjustment of the headband with a single hand while being active.

Utility Model Patent ZL 201922003670.X

### One-handed adjustment while running

During trail running, the headband will inevitably loosen and fall due to bumpy and changing road conditions, resulting in changes in lighting angles, so the original intention of the single-handed design is to effectively ensure the runners' stride and safety, thus making sure every second counts and every step comforts.

Just push and rotate the button to adjust the length of the headband. The New SPORT Headband Fit System couldn't be more perfect to adjust the headband with a single hand





### **APPLICATION SCENARIOS**

Fenix products include flashlights, tactical lights, headlamps, bicycle lights, camping lanterns and lighting accessories, which are widely used in the following environments: outdoor sports, industrial, law enforcement, military, EDC (everyday carry), etc. Fenix aims to satisfy customers' pursuit of versatile, mobile lighting products with the mission of "Lighting For Extremes".



**FENIX EDC (EVERYDAY CARRY) SERIES** products are deeply loved by thousands of users for the compact size, stylish appearance, applicable brightness, and practical functionality. In addition, the excellent resistance to water and impact makes the EDC light an indispensable helper in everyone's daily lighting.




**FENIX OUTDOOR SERIES** are professional lighting tools specialized for a variety of outdoor environments. Its ingenious design, excellent performance and high reliability in both water and drop tests mean that you won't have to worry when using our lights, as you can trust Fenix to safely light your way through the darkness.

Recommend:	
Flashlight	LD Series, PD Series
Headlamp	HL Series, HM Series
Bicycle Light	BC Series
Camping Lantern	CL Series

FENIX TACTICAL SERIES upholds the design concept of toughness, reliability and professionality. This series enters with high performance and extended reach. Fenix tactical products are widely used and recognized by major national departments such as the Switzerland Military Department, the Netherlands Police, the Saudi Arabia Border Defense, and the Queensland Police of Australia, etc.

Recommend:	
Flashlight	PD Series, TK Series
Tactical Light	GL Series

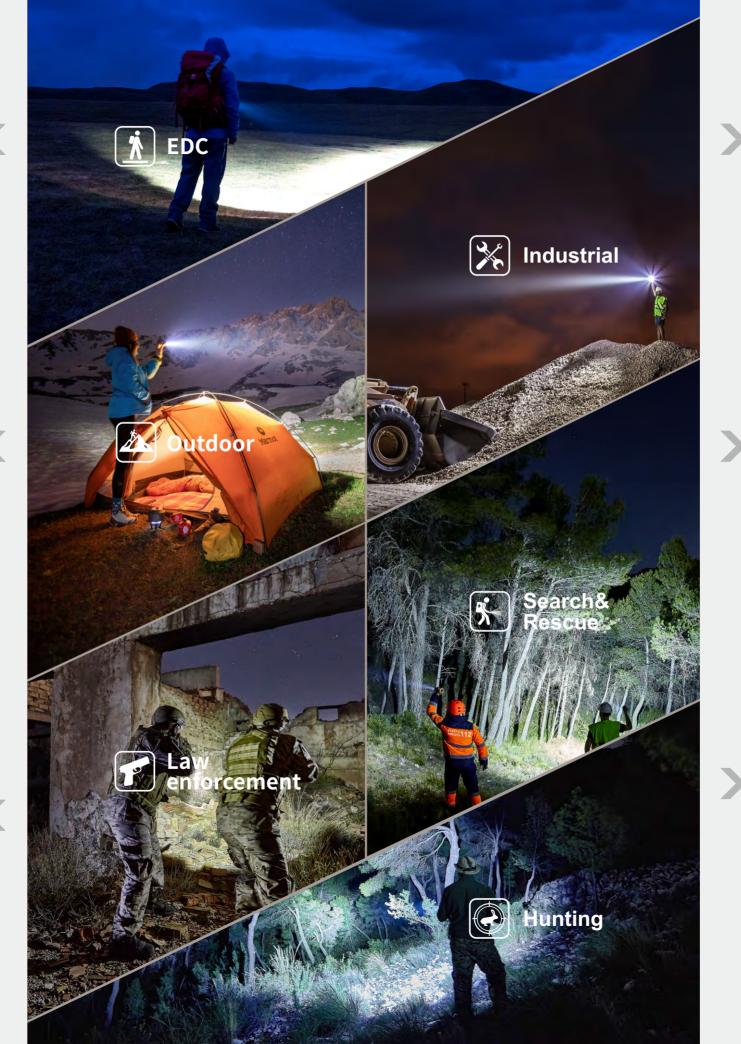

FENIX INDUSTRIAL LIGHTING PRODUCTS are mobile lighting tools specially designed for industrial applications. Simple operation plus reliable performance have kinds of tasks handled quickly and efficiently. Fenix industrial products are now widely used and recognized by not only ordinary workers but also professional institutes such as petroleum companies and fire departments.

Recommend:	
Flashlight	WF Series, WT Series
Headlamp	HM Series, HP Series, WH Series

FENIX SEARCHING & RESCUING SERIES combines outstand-ing performance with a user-friendly design. Its ultra-high output and far-reaching beam distance provide excellent lighting support for searching and rescuing activities, plus reliable design of water, dust and impact resistance. This tough series must be an irreplaceable lighting tool for outdoor searching and rescuing.

Recommend:	
Flashlight	LR Series
Headlamp	HP Series

THE FENIX HUNTING SERIES features high output, optimal beam distance and reliable performance. In addition, multicolored light sources and sufficient accessories make this series an indispensable helper in night hunting, prey tracking and equipment inspection.

Recommend:	
Flashlight	HT Series, TK Series
Tactical Light	GL Series
Headlamp	HM Series

# HADEX

01
FLASHLIGHTS

E Series (EDC Flashlights)
LD Series (Professional Outdoor Flashlights)
PD Series (Portable High-performance Flashlights)
TK Series (Tough and Powerful Flashlights)
HT Series (Hunting Flashlights)
LR Series (Searching Flashlights) $$
WF Series (Industrial Flashlights) $\sim$ 67
WT Series (Multifunctional Work Lights)

TACTICAL LIGHTS


03 HEADLAMPS	HL Series (Lightweight Outdoor Headlamps)	5 3
04 BICYCLE LIGHTS	BC Series (High-performance Integrated Bicycle Lights)	03
CAMPING LANTERNS	CL Series (High-performance Camping Lanterns)	10
06	ACCESSORIES 1	15
Ub	ACCESSORIES COMPATIBILITY GUIDE 12	25
ACCESSORIES	FENIX PRODUCTS SPECIFICATION CHART 12	29
	CUSTOMER SERVICE 13	33

GL Series (Professional Tactical Lights)

<sup>\*</sup>There may be some differences between the upcoming product and its finally listed version.

# FLASHLIGHTS


Fenix flashlights are specifically designed for all kinds of harsh environments. All flashlight products fully embody toughness, reliability, and user-friendliness. Fenix makes a flashlight that can fit any need, whether it is tactical law enforcement, industrial operations, searching and rescuing or outdoor hiking. Excellent ability to withstand harsh conditions, easy to use, and comfortable grip, all of which make Fenix flashlights stand out from our competitors.

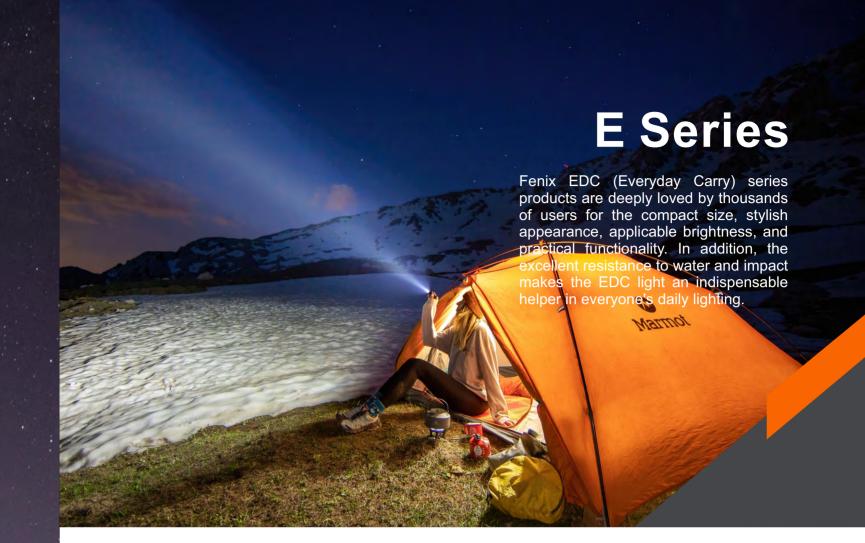





-thr	IP68
	1xAAA




- Ultra-compact size for everyday carry.
- One-handed operation with the rotating switch.
- All-metal CNC machining light body.
- Two colors for option.

**SIZE:** 2.62" x 0.59" x 0.55" / 66.5 x 15 x 14 mm | WEIGHT: 0.46 oz / 13 g (excluding battery)



### E02R RECHARGEABLE MINI KEYCHAIN FLASHLIGHT

~#~	IP68
	120mAh



The Fenix E02R is a USB rechargeable keychain flashlight. This incredibly small, mini flashlight is powered by the built-in rechargeable Li-polymer battery. A reliable twisty head activates the two brightness levels. Twist the head to access the Micro USB charging port. Made of quality aluminum, completely dustproof and waterproof, this keychain flashlight is perfect for everyday carry.

- Micro USB rechargeable.
- Twisty head for on/off and brightness selection.
- Integrated design of light head and tail.
- Two optional colors for free choice.

| **SIZE**: 1.89" x 0.59" x 0.55" / 48 x 15 x 14 mm WEIGHT: 0.53 oz / 15 g (including battery)










Twisty light head for fast choice of brightness levels. Integrated design of light head and tail.



M	IP68
	400mAh





- Max 500 lumens output.
- Ultra-compact keychain flashlight for easy carry.
- USB Type-C rechargeable.
- Red warning light.
- Breathing indicator with variable color.

SIZE: 2.07" x 1.02" x 0.51" / 52.5 x 26 x 13 mm WEIGHT: 1.06 oz / 30 g (including battery)



The Fenix E03R V2.0 is a high-performance keychain flashlight that has an incredibly small body of 30 grams. Featuring a USB Type-C  $\,$ charging interface and the included 400mAh battery, the light can be charged without having to worry about an additional charger. Exquisite design, IP68-rated protection and easy operation make E03R V2.0 a reliable and helpful EDC lighting tool and should be your first choice as a collection or as a gift.

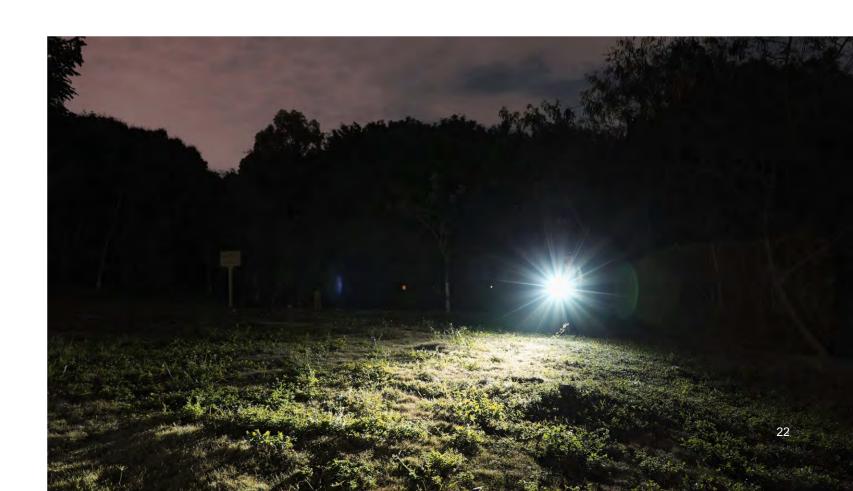

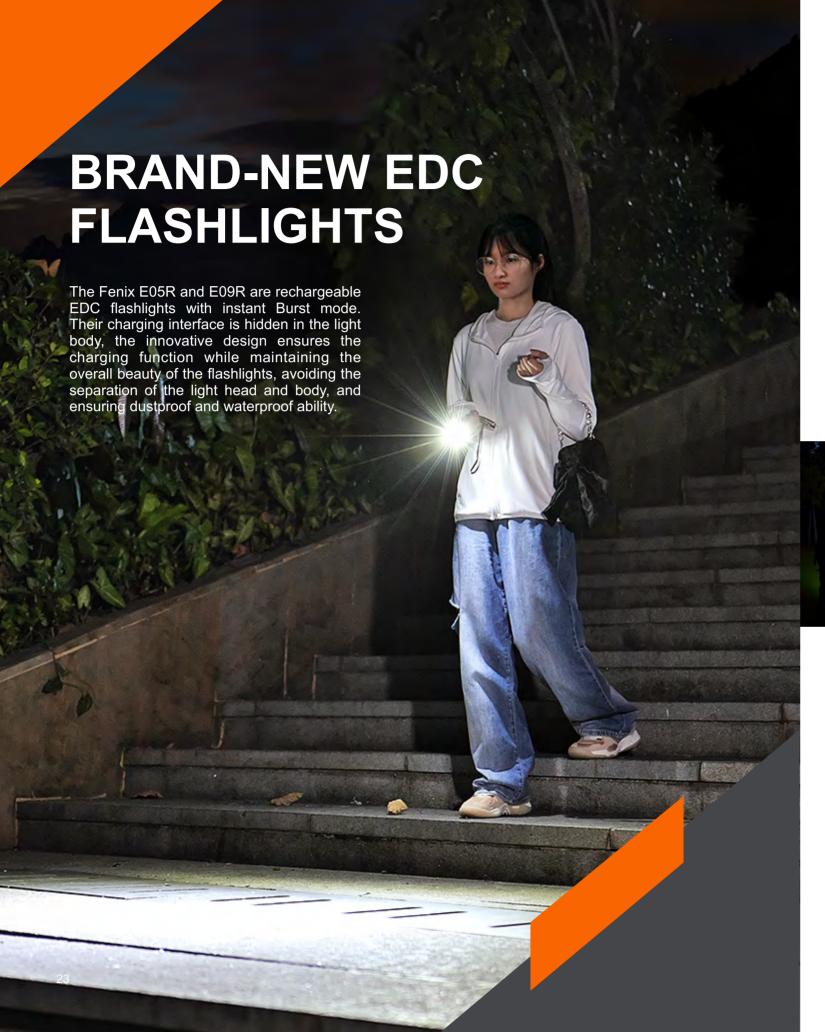



IP68 320mAh



400 lumens



64 meters



30 hours



- Mini size for perfect everyday carry.
- Instant Burst.
- Hidden micro USB charging port.
- All-metal CNC precision processing.

SIZE: 2.68" x 0.60" x 0.59" / 68 x 15.3 x 15 mm WEIGHT: 0.85 oz / 24 g (including battery)



### E09R RECHARGEABLE MINI HIGH-OUTPUT FLASHLIGHT

~fr	IP68
	800mAh



**600** lumens

**124** meters

70 hours

- Max 600 lumens output and 124 meters beam distance.
- Hidden USB Type-C charging port.
- All-metal CNC precision processing.
- Ultra-compact size for convenient carrying everyday.




SIZE: 3.11" x 0.76" x 0.72" / 79 x 19.3 x 18.4 mm WEIGHT: 1.59 oz / 45 g (including battery)



E12 V2.0 PORTABLE EDC FLASHLIGHT

~#~	IP68
	1xAA



- Automobile ultrathin optical lens coating process.
- No standby current, safe and cost-efficient.
- One-handed operation with the single tail switch.
- Two-position body clip and tail standing capability for varying conditions.




| **SIZE**: 3.06" x 0.75" x 0.69" / 77.6 x 19 x 17.6 mm | **WEIGHT**: 0.96 oz / 27.3 g (excluding battery)









- Max 350 lumens output and 126 meters beam distance.
- One-handed operation with the tail switch.
- Digitally regulated circuit for maintaining a stable output.
- Intelligent overheat protection and reverse polarity protection.





| SIZE: 5.00" x 0.83" x 0.66" / 127 x 21 x 16.8 mm | WEIGHT: 1.48 oz / 42 g (excluding battery)

Utility Model Patent ZL 201820183805.8



The Fenix rechargeable E18R V2.0 is a high-performance flashlight in an ultra-compact, everyday carry design. This flashlight produces a maximum of 1200 lumens with a useful beam of 146 meters. Powered by an included ARB-L16-700P rechargeable Li-ion battery, this flashlight is fully rechargeable via its USB Type-C charging port. A convenient side switch activates all lighting modes and includes a battery level indicator - helping you always know the status of your battery. The magnetic base facilitates hands-free use for attaching the light to most metal surfaces. Waterproof and dustproof, the Fenix E18R V2.0 can handle more than just around-the-house tasks. A reversible pocket clip keeps the light secure whether you prefer bezel-up or bezel-down storage/carry. Take this flashlight on a hike, use at work, or keep it in care for emergencies. The E18R V2.0 is a great everyday carry light that can do much more.



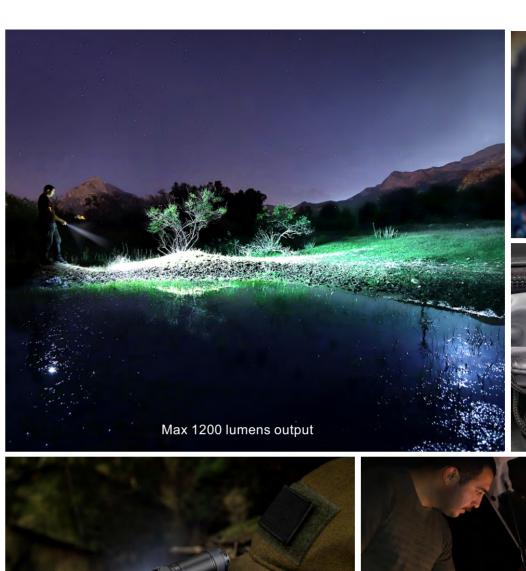
























- Max 1500 lumens output and 200 meters beam distance.
- USB Type-C fast charging, inner waterproofing treatment.
- Ultrathin optical lens for soft and balanced beam.
- Boot-up battery level indication and low-voltage warning.

| SIZE: 4.29" x 1.04" x 0.89" / 109 x 26.5 x 22.6 mm | WEIGHT: 2.33 oz / 66 g (excluding battery)




~#~	IP68
	1x18650/2xCR123A

	Turbo	High	Med	Low	Eco	Strobe
OUTPUT	1500 lumens	800 lumens	350 lumens	150 lumens	30 lumens	1500 lumens
RUNTIME	2 hours 5 minutes	2 hours 30 minutes	6 hours	17 hours 15 minutes	73 hours 35 minutes	1









- Max 3100 lumens output.
- USB Type-C charging port.
- Magnetic base for hands-



| SIZE: 4.72" x 1.04" x 0.98" / 120 x 26.5 x 25 mm | WEIGHT: 5.22 oz /148 g (excluding battery)

~ <b>J</b>	IP68
	1x21700



### MULTIPURPOSE POWER BANK FLASHLIGHT

~#~	IP68
	5000mAh



- 5000mAh large-capacity battery.
- USB Type-C fast charging.
- Unique body design and color.

| SIZE: 5.43" x 1.10" x 1.10" / 138 x 28 x 28 mm | WEIGHT: 6.00 oz / 170 g (including battery)



Fenix E-CP is a rechargeable outdoor flashlight with a power bank function. It has a built-in 5000mAh large-capacity battery to ensure longer runtime, and it can be used as a power bank for charging small digital products such as mobile phones. Featuring IP68 protection, it can be used in harsh outdoor environments.

# E-SPARK EMERGENCY CHARGING AND DISCHARGING KEYCHAIN FLASHLIGHT

IP24
800mAh



- Compact for easy carry.
- USB Type-C charging and discharging
- Red flash function for emergency
- Lockout function avoids accidental activation.

SIZE: 3.43" x 1.50" x 0.31" / 87 x 37 x 8 mm WEIGHT: 1.34 oz / 38 g (including battery)



Fenix E-SPARK is an emergency keychain flashlight with charging and discharging functions. Built-in 800mAh high-capacity battery to ensure ultra-long runtime, with Type-C dual interface for charging and discharging, which can be used for emergency charging of mobile phones. It also has a red flashing warning function which can be used as a signal light.

### E-STAR PORTABLE SELF-POWERED EMERGENCY FLASHLIGHT

Fig.	IP24
	1300mAh/1xAA



- Single-handed power generation.
- Built-in super capacitor, light can be used even if without battery, no need to constantly press the handle.
- Made of ABS engineering plastics, in line with ergonomic industrial design.
- Supports USB Type-C charging, easily be charged by external devices.

SIZE: 5.31" x 2.09" x 0.94" / 135 x 53 x 24 mm WEIGHT: 4.52 oz / 128 g (including battery)



The Fenix E-star is a portable self-powered flashlight for emergencies, including areas lacking stable power supply and disaster-hit areas; as PSK/BOB gear, also it can be used as a backup flashlight for extended outdoor activities. The flashlight allows use while charging, a single-handed pressing for power generation, which is easy even for long-time operation. Another power supply comes from the included low self-discharge Ni-MH battery, a common AA battery can be used as well. And the flashlight supports USB Type-C charging, with the built-in supercapacitor, it helps with energy storage and buffering when the battery is damaged or missing.




### **LD Series**

Oriented towards the outdoor professional, Fenix develops its LD series flashlight with an exquisite and compact design, which lessens the volume and reduces weight to the largest extent. With various output levels and a flashing function, the Fenix LD models can satisfy your various lighting needs, making them the preferred quality lighting devices for those highly difficult professional outdoor sports activities.



LD02 DUAL LIGHT SOURCES EDC PENLIGHT

A.	IP68
	1xAAA



The LD02 V2.0 is a super compact EDC flashlight that features neutral white and UV lights. It is fitted with a 90 CRI Cree XQ-E HI neutral white LED and 365nm UV. One tail switch controls three output levels and the UV light output. Powered by one AAA battery, the light delivers a max output of 70 lumens. With a stainless steel tail switch for one-handed activation and output selection, and a light head also made of stainless steel, this exquisite and reliable penlight is a must-have for everyday carry, outdoor journeying, personal collection or gifting.



| SIZE: 3.62" x 0.53" x 0.53" / 92 x 13.5 x 13.5 mm | WEIGHT: 0.85 oz / 24 g (excluding battery)

### LD15R USB RECHARGEABLE FLASHLIGHT

~ <b>J</b>	IP68
	1x16340/1xCR123A



110 hours

- Max 500 lumens output and 85 meters beam distance.
- White and red light sources.
- Micro USB charging.
- Two-way body clip and magnetic tail.

SIZE: 2.76" x 0.75" x 0.75" / 70 x 19 x 19 mm WEIGHT: 1.41 oz / 40 g (excluding battery)







Micro USB charging

Magnetic tail

### LD22 MULTIFUNCTIONAL OUTDOOR FLASHLIGHT

~~	IP68
	1100mAh/2xAA/2X14500



- Max 800 lumens output and 214 meters beam distance.
- Powered by a 1100mAh rechargeable Li-ion battery pack, compatible with 2 x AA batteries.
- Dual body clip for easy carry.
- Instant on with the tactical tail switch and output selection with the side switch.

**SIZE:** 5.83" x 0.85" x 0.71" / 148 x 21.5 x 18 mm |WEIGHT: 3.39 oz / 96 g (including battery)



Fenix LD22 V2.0 is a multifunctional outdoor flashlight that includes a 1100mAh rechargeable Li-ion battery pack and it is compatible with easyto-access AA batteries. Tactical tail switch and side switch combination operation, dual body clip make it easy to operate and easy to carry.











- Max 1600 lumens output and 205 meters beam distance.
- Ultra-thin optical lens with the coating process.
- Instant activation with the tactical tail switch; output selection with the side switch.
- Two-position body clip.

IP68 1x18650/ 2xCR123A

> SIZE: 4.29" x 1.00" x 0.85" / 109 x 25.4 x 21.5 mm WEIGHT: 2.08 oz / 59 g (excluding battery)

		Turbo	High	Med	Low	Eco	Strobe	sos
C	DUTPUT	1600 lumens	800 lumens	350 lumens	150 lumens	30 lumens	1600 lumens	30 lumens
R	UNTIME	1 hour 25 minutes	1 hour 50 minutes	5 hours 30 minutes	17 hours 10 minutes	70 hours	1	1







### PD25R PORTABLE RECHARGEABLE FLASHLIGHT

~ <b>J</b> ~	IP68
	1x16340/1xCR123A



**800** lumens



**250** meters



**70** hours

- Max 800 lumens output and 250 meters
- Hidden USB Type-C charging port.
- Included two-position body clip.
- Instant on with the tactical tail switch and output selection with the side switch.

**SIZE:** 3.62" x 0.94" x 0.94 / 92 x 24 x 24 mm WEIGHT: 2.75 oz / 78 g (including battery)



The Fenix PD25R flashlight is a portable flashlight with a hidden Type-C charging port. The PD25R blasts an amazing 800 lumens a total distance of 250 meters. The PD25R is powered by a single 16340 rechargeable Li-ion battery (included) or can operate on a disposable CR123A Lithium battery. Compact and built-tough with an IP68 dustproof and waterproof rating, this flashlight is perfect for just about any outdoor or work activity.

### PD32 V2.0 ALL-ROUND COMPACT FLASHLIGHT

~\$~	IP68
	1x18650/2xCR123A



The upgraded Fenix PD32 V2.0 LED flashlight is an all-around flashlight with a compact body. Tap and hold the multifunctional tail switch for a fast momentary on and press the tail switch to access the different modes with a single hand. The PD32 V2.0 LED flashlight is perfect for hiking, camping and outdoor activities and is powerful enough for law enforcement, search and rescue.

- Max 1200 lumens output and 395 meters beam distance.
- Multifunctional tail switch.
- Compact structure, a perfect pocket size.
- Instant activation and strobe.



















- New long-distance LED.
- Pocket size for easy carry.
- Boot-up battery level indication and low-voltage warning.
- Instant activation with the tactical tail switch and output selection with the side switch.

SIZE: 5.28" x 1.00" x 0.90" / 134 x 25.4 x 22.8 mm WEIGHT: 2.95 oz / 83.5 g (excluding battery)

~ <b>t</b> ~	IP68
	1x18650/2xCR123A

	Turbo	High	Med	Low	Eco	Strobe
OUTPUT 1700 lumens 600 lumens		150 lumens 50 lumens		5 lumens	1700 lumens	
RUNTIME	RUNTIME 1 hour 25 minutes 2 hours 35 minute		8 hours 30 minutes	26 hours 25 minutes	230 hours	1



The Fenix PD35R rechargeable flashlight is a compact tactical flashlight. This light delivers a maximum of 1700 lumens at a distance of 353 meters. Turn the light on and off, cycle through the five lighting modes, and activate the instant strobe via the newly designed dual tail switches. Recharge the PD35R with the USB Type-C charging port, which also features a battery level indication function. PD35R is durable and rugged with an IP68 dustproof and waterproof rating. Compact and built-tough, the Fenix PD35R rechargeable flashlight is a great tool for outdoors or tactical applications.









- Max 1700 lumens output.
- Luminus SFT40 LED with max 353 meters beam distance.
- USB Type-C charging port with inner waterproofing treatment.
- One-handed operation with dual tail switches.

| SIZE: 5.35" x 1.00" x 0.91" / 136 x 25.4 x 23.2 mm | WEIGHT: 4.94 oz / 140 g (including battery)



~ <b>J</b> ~	IP68
	1x18650/2xCR123A





PD36R MULTIFUNCTIONAL RECHARGE-ABLE FLASHLIGHT

~#~	IP68
	1x21700



Instant activation with momentary tactical tail switch; output selection with the side switch.

■ Two-position body clip for different lighting demands.

SIZE: 5.35" x 1.04" x 1.00" / 136 x 26.4 x 25.4 mm WEIGHT: 3.0 oz / 85 g (excluding battery)

The PD36R is an ultra-compact flashlight with a powerful USB Type-C charging port. Driven by a long-lasting 21700/5000mAh rechargeable Li-ion battery, the light emits a max output of 1600 lumens and 283 meters. Dual switch control five output levels and strobe for easy and fast operation. Additional features include battery level indicator, smart output memory and two-position body clip, all of which enhance daily usage in outdoor activities and tactical applications.








# PD36 TAC MECHANICAL TACTICAL FLASHLIGHT

1x21700



- Max 3000 lumens output and 274 meters beam
- Powered by a single 21700 rechargeable Li-ion
- Tactical and duty modes for different environments.
- Dual-function tactical switch to accurately activate



SIZE: 5.51" x 1.04" x 1.00" / 140 x 26.5 x 25.4 mm WEIGHT: 3.24 oz / 92 g (excluding battery)

The Fenix PD36 TAC flashlight is a mechanical flashlight that remains pocket-size but focuses on tactical employment. Included with a 21700 rechargeable Li-ion battery, the PD36 TAC emits a max 3000-lumen output and has an impressive beam distance of up to 274 meters. The PD36 TAC features a dual-function tactical switch which enhances its tactical capabilities. The Tactical Mode strengthens the PD36TAC with a faster operation and simplified selection of high and instant strobe. Switch to the Duty Mode, the PD36 TAC delivers 6 output modes including a strobe. Made for professional use, security and law enforcement, the PD36 TAC is truly countable to deliver reliable, powerful lighting for a wide range of situations.










The Fenix PD36R Pro rechargeable flashlight is a high-performance rechargeable flashlight that is sure to surprise you. Fitted with a Luminus SFT70 LED, this flashlight features an incredible performance by delivering a maximum of 2800 lumens to an impressive distance of 380 meters, all on the included 5000 mAh battery. The high-capacity 5000 mAh battery can be conveniently charged through the USB-C port on the flashlight. Operating this powerful LED rechargeable flashlight is simple with dual tail switches for momentary on/off, the ability to cycle through five lighting modes, and the activation of the instant strobe. Additionally, you will always be able to see the battery's charge status at a glance with the external battery lovel indicator. IR68 rated dustrated and waterproof this flashlight is the perfect all purpose lighting tool for level indicator. IP68-rated dustproof and waterproof, this flashlight is the perfect all-purpose lighting tool for those needing maximum brightness and long runtimes.

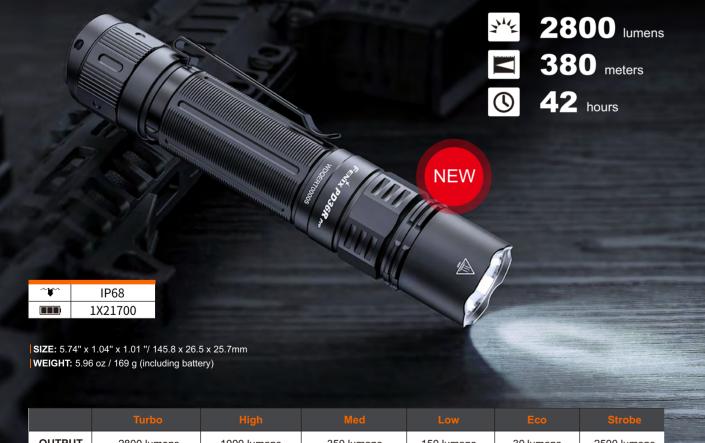

	Turbo	High	Med	Low	Eco	Strobe	
OUTPUT	2800 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	2500 lumens	
RUNTIME	3 hour 30 minutes *	3 hours 55 minutes	8 hours 15 minutes	19 hours	42 hours	/	















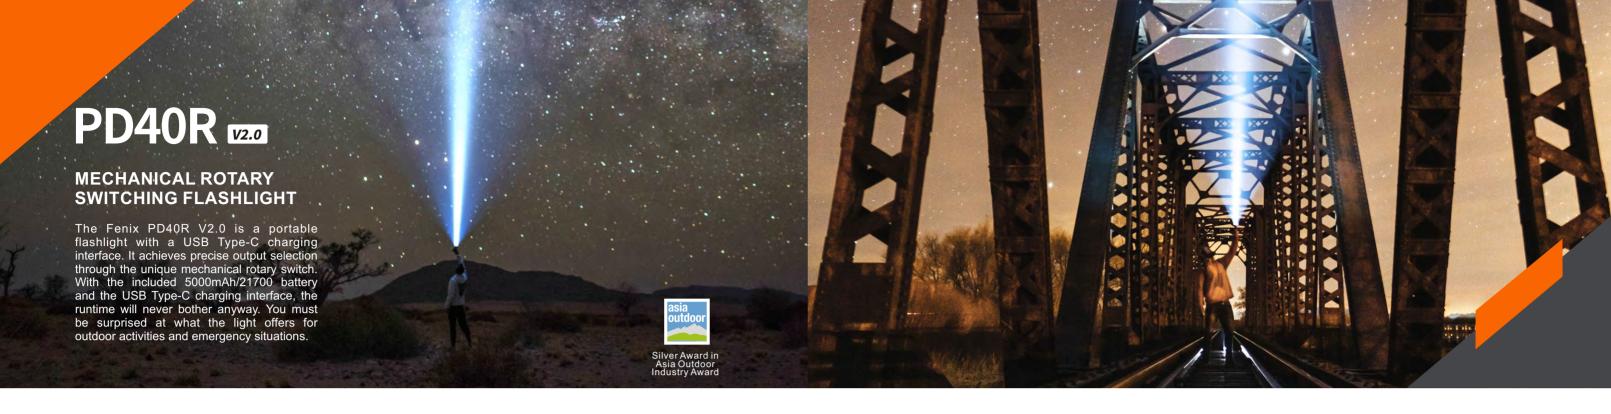








Instant activation with the mechanical rotary switch.



Second-generation mechanical ring, the rotary switch combats high-intensity magnetic interference.



Uses a 21700 battery and supports USB Type-C fast charging.



- Max 3000 lumens output and 405 meters beam distance.
- Patented technique of rotary mode selection switching for accurate operation.
- Inner waterproof USB Type-C charging port.
- Boot-up battery level indication and low-voltage warning.

**SIZE:** 5.43" x 1.31" x 1.02" / 138 x 33.2 x 26 mm WEIGHT: 4.13 oz / 117 g (excluding battery)




Utility Model Patent	ZL 201821227065.

	Turbo		Med	Low	Strobe
OUTPUT	OUTPUT 3000 lumens 1000 lumens		350 lumens	30 lumens	2500 lumens
RUNTIME 2 hours 40 minutes 3 hours 10 minutes		8 hours 30 minutes	88 hours 10 minutes	1	

UC35 V2.0 USB RECHARGEABLE TACTICAL FLASHLIGHT

~#~	IP68
	1x18650



- Max 1000 lumens output and 266 meters beam distance.
- Micro USB rechargeable.
- Boot-up battery level indication.
- Instant activation with the tactical tail switch and output selection with the side switch.


SIZE: 5.51" x 1.00" x 0.92" / 140 x 25.4 x 23.5 mm WEIGHT: 3.13 oz / 89 g (excluding battery)

Utility Model Patent ZL 201721611084.8








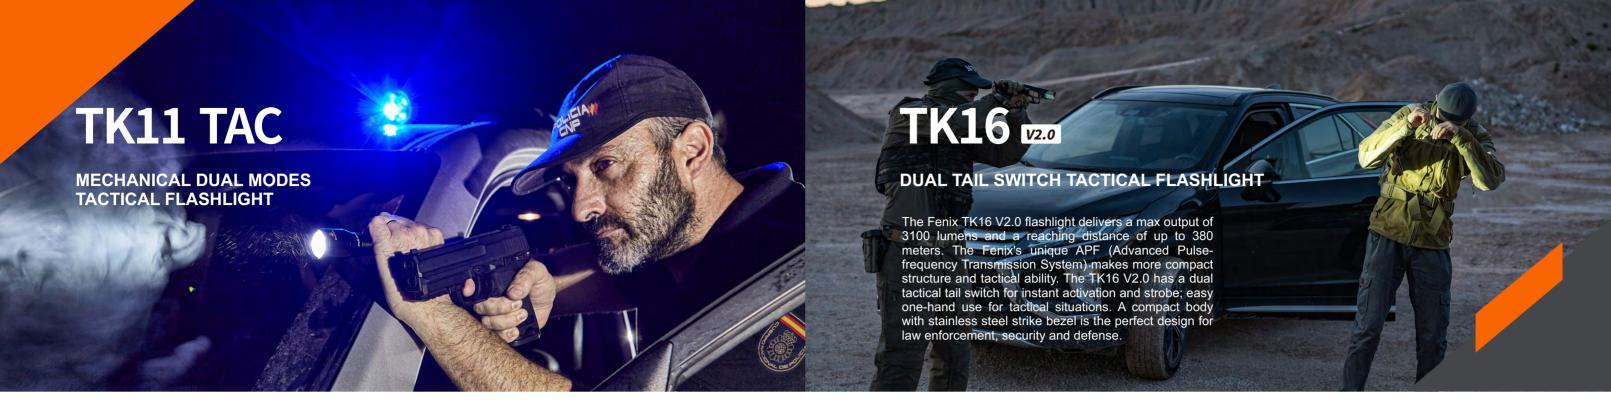

The Fenix TK11 TAC (Tactical Edition) LED flashlight, remains in pocket-size form but surpasses in performance and tactical deployment. Designed with the military and law enforcement professionals in mind, The TK11 TAC features Tactical mode and Duty mode. The Fenix's unique APF (Advanced Pulse-frequency Transmission System) makes a more compact structure and stronger anti-interference ability. Perfect for professional use, security and law enforcement, you can count on the TK11 TAC to deliver reliable, powerful lighting for a wide range of situations.



- Max 1600 lumens output and 335 meters beam distance.
- Tactical and Duty modes for flexibly needed choice and
- Patented dual-function tactical switch for instantly tactical activation.
- accidental activation.





1x18650/2xCR123A

Lockout function avoids


Utility Model Patent 201920500579.6 **SIZE:** 5.51" x 1.34" x 0.93" / 140 x 34 x 23.5 mm WEIGHT: 4.02 oz / 114 g (excluding battery)

Dual tactical tail switch





ty Model Patent 201920500579.6



- Max 3100 lumens output.
- Advanced Pulse-Frequency Transmission System (APF).
- Instant activation and strobe with the tactical switch.
- Compact structure with a single-layer body.

| **SIZE:** 5.63" x 1.34" x 1.00" / 143 x 34 x 25.4 mm | WEIGHT: 3.95 oz / 112 g (excluding battery)



	Turbo		High	Med	Low	Eco	Strobe
0	UTPUT	TPUT 3100 lumens 1000 lumens		350 lumens	150 lumens	30 lumens	3100 lumens
RI	UNTIME	2 hours 40 minutes	2 hours 50 minutes	8 hours 20 minutes	19 hours 10 minutes	43 hours 20 minutes	1












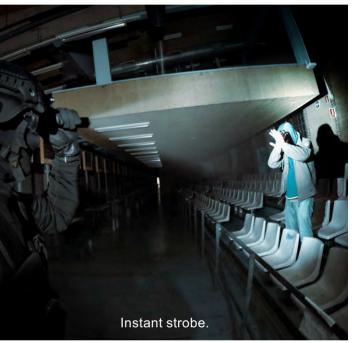



### TK22 TAC MILITARY AND DUTY FLASHLIGHT

~¥~	IP68
	1x21700



**2800** lumens

**540** meters

**49.5** hours

- Max 2800 lumens output and 540 meters
- Tactical and Duty modes for flexibly needed choice and operation.
- Patented dual-function tactical switch for instantly tactical activation.
- Lockout function avoids accidental activation.

The Fenix TK22 TAC military flashlight stands out in performance and tactical deployment. The TK22 TAC features Tactical mode and Duty mode. Included with a 21700 rechargeable Li-ion battery, the TK22 TAC is an up to 2800 lumens flashlight in turbo output while throwing its beam a distance of up to 540 meters. In Duty Mode, the TK22 TAC delivers 5 output modes including a strobe. Switch to the Tactical Mode to operate for fast, simplified selection of turbo and instant strobe. Perfect for professional use, security and law enforcement, you can count on the TK22 ATC to deliver reliable, powerful lighting for a variety of situations.



SIZE: 6.06" x 1.57" x 1.02" / 154 x 40 x 26 mm WEIGHT: 5.50 oz / 156 g (excluding battery)





Mechanical toggle switch

### TK26R TRI-COLORED TACTICAL LAW-ENFORCING FLASHLIGHT

IP68 1x18650/2xCR123A



- Max 1500 lumens output and 350 meters beam distance.
- Red. white and green light sources.
- Instant strobe with the dual tail switch.
- USB Type-C charging.

SIZE: 5.91" x 1.57" x 1.00" / 150 x 40 x 25.4 mm WEIGHT: 5.54 oz /157 g (excluding battery)




# **BRAND NEW WHITE** LASER FLASHLIGHT The Fenix white laser flashlights feature ultra-long-range beam, with the combination of the straight beam of white laser, the flashlights are suitable for precise tactical applications. The white laser light with extremely high density is processed by three layers of special transparent membrane, a highly concentrated and collimated, safe white light beam is formed.

# TK30 WHITE LASER TACTICAL FLASHLIGHT

~\\$\`	IP68
	1x21700





- White laser light source.
- Instant activation with tactical tail switch and output selection with the functional side switch.
- Boot-up battery level indication, low-voltage warning, and intelligent memory circuit.




SIZE: 6.22" x 1.26" x 1.02" / 158 x 32 x 26 mm | WEIGHT: 5.15 oz / 146 g (excluding battery)

\*Laser Classification: Class I / Class 1

The TK30 is a high-performance white laser tactical flashlight with a maximum range of 1200 meters and a white laser with a straight beam for precise tactics. The light comes with a 5000mAh large-capacity 21700 Li-ion battery that ensures ultralong runtime; and a tactical tail switch for instant activation. Featuring battery level indication, the remaining battery power can be read every time the light is turned on. TK30 is the best choice as a tactical partner.











Mechanical toggle switch for tactical, duty, lock mode switching.



The light can be powered by a single 18650 or two CR123A batteries in emergency situations.



Battery level indication and low voltage warning.



Instant strobe activation.

5000 lumens
400 meters
85 hours

- Patented toggle switch for the selection of tactical and outdoor modes.
- Max 5000 lumens output.
- Dual tactical tail switch.
- Instant strobe.

| **SIZE**: 5.63" x 1.69"/ 143 x 43 mm | **WEIGHT**: 7.13 oz / 202 g (excluding battery)




2x18650/ 4xCR123A

Utility Model Patent

del Patent ZL 201721574627.3

	TACTICAL MODE		DUTY MODE					
	Tactical Strobe		Turbo	High	Med	Low	Eco	Strobe
OUTPUT	3500 lumens	3500 lumens	5000 lumens	2000 lumens	800 lumens	350 lumens	30 lumens	3500 lumens
RUNTIME	1 hour 50 minutes	1	1 hour 40 minutes	2 hours	4 hours	13 hours 40 minutes	85 hours	1



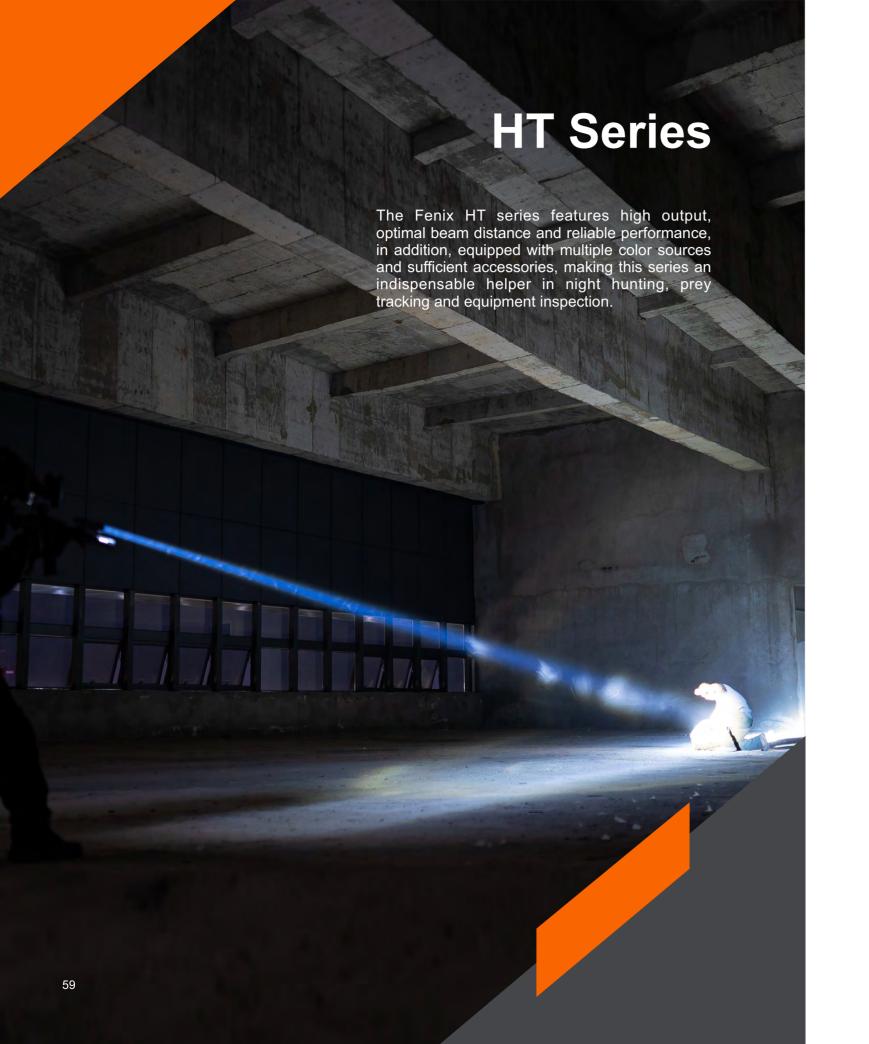

# HT18 LONG-RANGE HUNTING FLASHLIGHT

The same of the sa	IP68
	1x21700/1x18650



61 hours

- Max 1500 lumens output and 925 meters beam distance.
- Included red and green filter adapters, offering triple-colored lighting.
- Instant power activation with momentary tactical tail switch.
- Included a Fenix ARB-L21-5000U USB rechargeable 21700 Li-ion battery.

SIZE: 7.24" x 2.68" x 1.02"/ 184 x 68 x 26 mm WEIGHT: 7.76 oz / 220 g (excluding battery)



### HT30R RECHARGEABLE WHITE LASER TACTICAL FLASHLIGHT

M	IP68
	1x21700



500 lumens

**1500** meters

**7.25** hours

- White laser module makes beam distance up to 1500 meters.
- Hidden USB Type-C charging port.
- Included a 5000mAh/21700 large-capacity battery.
- Advanced Pulse-frequency Transmission System.



SIZE: 7.05" x 1.57 x 1.02" / 179 x 40 x 26 mm WEIGHT: 9.31 oz / 264 g (including battery)

Fenix HT30R is a white laser tactical flashlight with an ultra-long beam of 1500 meters. The light neck has a hidden Type-C charging interface, powered by a single 21700 high-capacity Li-ion battery. The dual tail switch activates instant on and strobe function. It can quickly respond to operations in military and law enforcement, emergency rescue, personal defense and other activities.

### LR Series

The Fenix LR series combines ultra-high performance with a user-friendly design. Its ultra-high output and far-reaching beam distance provide excellent lighting



# LR35R

### POWERFUL MID-SIZE SEARCHING FLASHLIGHT

The Fenix LR35R is a super bright searching flashlight that blasts a max output of 10000 lumens and a max beam distance of 500 meters. This flashlight can be quickly charged with the two included 4000mAh Li-ion power batteries via the USB Type-C port. The amount of light that the Fenix LR35R flashlight emits is truly remarkable, a wide beam angle and strobe function are quite ideal for Search and Rescue. Extremely small for a flashlight with this much power, only 5.5" long plus a flat light body, this flashlight is the perfect tool for exploring and










- Max 10,000 lumens output and 500 meters beam distance.
- Mid-size body for one-handed grip.
- USB Type-C charging port.
- Lockout function avoids accidental activation.

SIZE: 5.51" x 2.03" x 1.83" / 140 x 51.5 x 46.5 mm WEIGHT: 8.43 oz / 239 g (excluding battery)

M	IP68
	2x21700

	Turbo	High	Med	Low	Eco	Strobe
OUTPUT	10000 lumens	3000 lumens	1200 lumens	450 lumens	50 lumens	10000 lumens
RUNTIME	1 hour 25 minutes	1 hour 35 minutes	3 hours 15 minutes	8 hours 20 minutes	80 hours	1

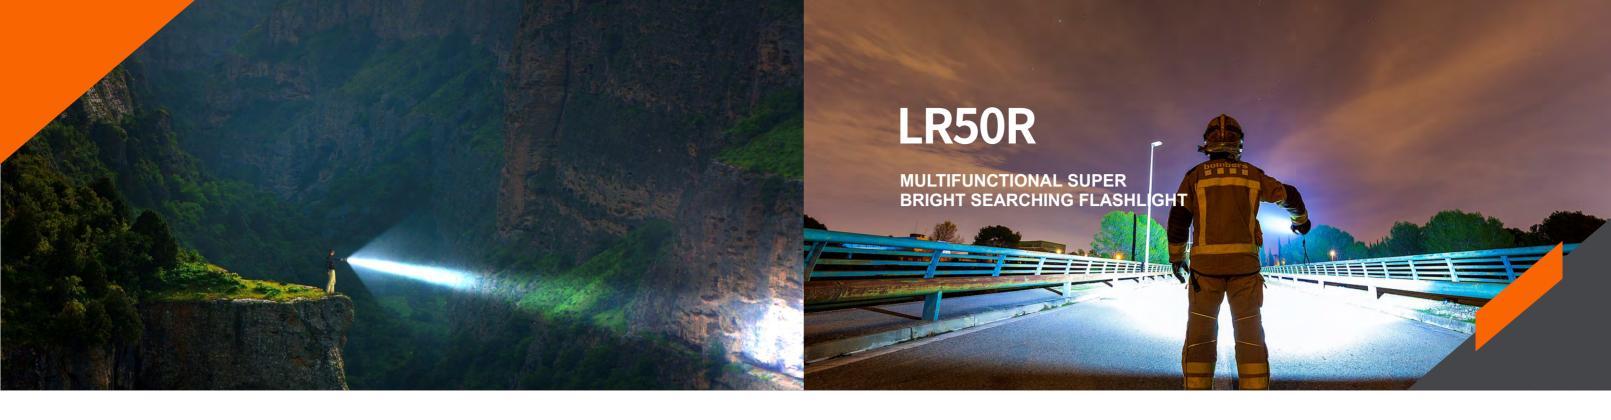

LR40R SUPER BRIGHT SPOT-AND-FLOOD SEARCHING FLASHLIGHT

The same IP68 3X21700




- Max 15000 lumens output and 1000 meters beam distance.
- Rotary toggle switch and an electronic switch for single-handed
- Spotlight, floodlight and combined modes for different lighting demands.
- USB Type-C port supports 18W fast charging.

**SIZE:** 6.89" x 3.31" x 2.05" /175 x 84 x 52 mm WEIGHT: 29.74 oz / 843 g (including battery)



The Fenix LR40R is a high-performance rechargeable ultra-compact searching flashlight that combines spot- and floodlight. You can operate the light with one hand with a toggle and electronic switch combination. A unique and user-friendly brightness downshifting sensor function is designed to avoid high temperatures at close-range lighting. Catering for numerous outdoor and extreme environments, this light is an indispensable helper in cave exploring, searching and rescuing, as well as acting as a backup light for drivers.










**12000** lumens



**950** meters



**58** hours




- Intelligent brightness downshifting sensor to avoid high temperature at close-range
- USB Type-C charging and discharging interface supports fast-charging protocols.
- Battery level indication for instant checking of remaining battery level.

SIZE: 6.42" x 3.46" x 2.36" / 163 x 88 x 60 mm WEIGHT: 34.78 oz / 986 g (including battery)



The same	IP68
	3.6V/16000mAh /1~4x21700

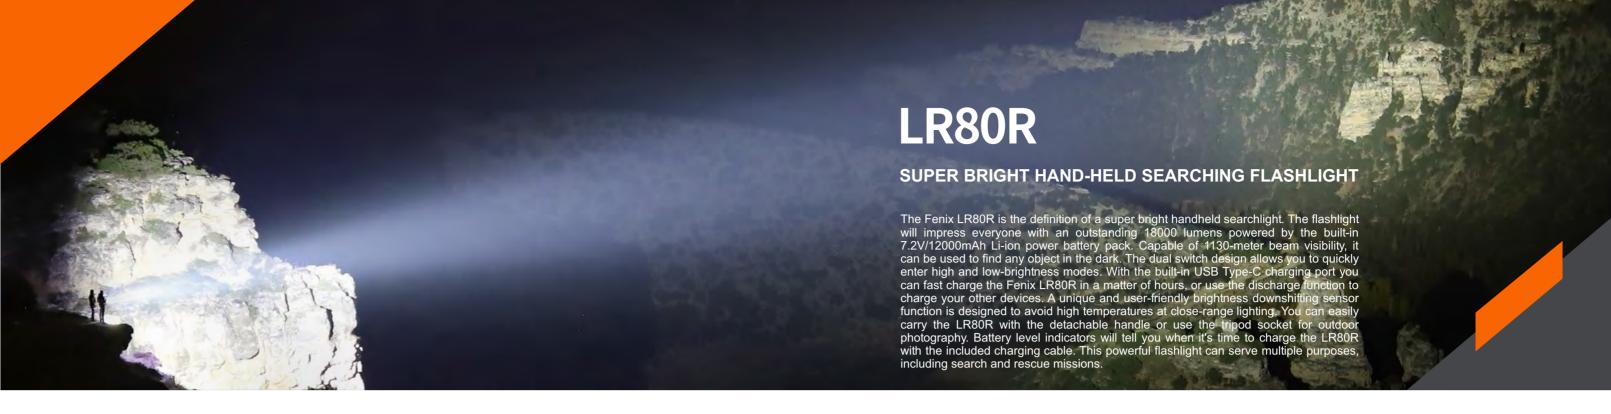

# LR60R MECHANICAL ROTARY SEARCHING FLASHLIGHT

~#~	IP68
	4X21700



- Max 18000 lumens output and 1000 meters beam distance.
- Mechanical rotary switch for rapid brightness and mode selection.
- OLED screen displays brightness, remaining runtime and remaining battery level.
- USB Type-C charging and discharging, and supports PD protocol of fast charging and discharging.

| **SIZE:** 7.87" x 3.35" x 2.36" / 200 x 85 x 60 mm | **WEIGHT:** 48.75 oz / 1382 g (including battery)



Fenix LR60R is an ultra-bright handheld search flashlight. The intuitive mechanical rotary switch provides rapid activation of brightness and mode selection. With an OLED display screen, the product status of brightness, remaining runtime and remaining battery level can be directly readable. It is a reliable choice for outdoor operations and search and rescue.









- High output, far-reaching beam shot, long-lasting runtime for wide-range searching lighting.
- High, low and flash modes for options.
- Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- Multiple wearing ways: hand-held, onehanded grip, back it on the shoulder.

| **SIZE**: 10.20" x 4.25" x 2.13" / 259 x 108 x 54 mm | **WEIGHT**: 57.71 oz / 1636 g (including battery)



	HIGH-OUTPUT MODE			LOW-OUTPUT MODE						
	Turbo	High	Med	Low	High	Med	Low	Eco	Strobe	sos
OUTPUT	18000 lumens	12000 lumens	6000 lumens	3000 lumens	1000 lumens	450 lumens	150 lumens	50 lumens	6000 lumens	150 lumens
RUNTIME	2 hours	2 hours 15 minutes	2 hours 50 minutes	5 hours 10 minutes	15 hours 40 minutes	39 hours	92 hours	300 hours	/	/



# **WF Series**

Fenix WF Series industrial flashlights are portable lighting tools designed for industrial applications. Simple operation, reliable performance, and a combination of practical features help you complete tasks quickly and efficiently.




# PROFESSIONAL EXPLOSION-PROOF FLASHLIGHTS

The Fenix explosion-proof flashlights are designed and manufactured in accordance with the international explosion-proof standard of IECEx system, which have passed the necessary tests and was certified by IECEx, ATEX and CSA. Thus these products can be safely used in explosive gas and dust atmospheres, users feel relieved when working in flammable and explosive places.



# WF05E INTRINSICALLY SAFE FLASHLIGHT

~W	IP66/68
	2xAAA



- Intrinsically explosion-proof.
- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- Three output levels, max 85 lumens.
- The body clip is made of explosion-proof anti-static plastic.

(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)












SIZE: 5.29" x 0.75" x 0.59" / 134.5 x 19 x 14.9 mm WEIGHT: 1.34 oz / 38 g (excluding batteries)

MAGNETIC INTRINSICALLY SAFE FLASHLIGHT

~#~	IP66/67
	3xAA



- Intrinsically explosion-proof.
- Made of explosion-proof and antistatic plastics.
- Magnetic light tail and body clip.
- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.

(Can be safely used in Zone 0, Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 20, Zone 21 and Zone 22 as well)










SIZE: 6.59" x 1.93" x 0.94" / 167.5 x 49 x 24 mm WEIGHT: 5.64 oz / 160 g (excluding batteries)

### WF30RE EXPLOSION-PROOF FLASHLIGHT



- Intrinsically safe explosion-proof flashlight.
- It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- Specialized charger for convenient charging.
- Orange-peel reflector for a soft and clean beam.



(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)







SIZE: 5.93" x 1.34" x 1.10" / 150.5 x 34 x 28 mm	~#~	IP66/68
WEIGHT: 7.58 oz / 215 g (including battery)		1xARB-L21-2600Ex

	High	Med	Low	Strobe
OUTPUT	280 lumens	120 lumens	30 lumens	280 lumens
RUNTIME	6 hours 50 minutes	15 hours 40 minutes	120 hours	1



The Fenix WF26R rechargeable flashlight facilitates how you keep your flashlight performing at full capacity. When stored with the included detachable charging cradle, your flashlight will always be ready when you need it. And with its 3000 lumens and over 450 meters beam distance, this light will meet any challenge. Other features include a dual tail switch for simplified mode selections, four brightness levels plus strobe and SOS, and boot-up battery level indication. This flashlight is perfect for a variety of industrial working people including electricity, railways, construction, pipelines, and warehousing, or anyone needing trusted battery performance.



- Max 3000 lumens output and 450 meters beam distance.
- The magnetic charging cradle can be separated from the magnetic charging cable.
- Instant activation and instant strobe with dual tail switch.
- Boot-up battery level indication and low-voltage warning.

tility Model Patent ZL 202220620151.7


- FLASH
- CHARGI
- | WEIGHT: 7.83 oz / 222 g (including battery)

HLIGHT SIZE: 6.14" x 1.59" x 1.05" / 156 x 40.4 x 26.6mm	~ <b>t</b> ~	IP68
GING CRADLE SIZE: 3.02" x 1.72" x 1.85" / 76.7 x 43.7 x 47mm		1x2170
HT: 7 83 oz / 222 a (includina hattery)		

	Turbo	High	Med	Eco	Strobe	sos
OUTPUT	3000 lumens	1000 lumens	350 lumens	30 lumens	3000 lumens	100 lumens
RUNTIME	2 hours 41 minutes	2 hours 47 minutes	8 hours 56 minutes	44 hours 8 minutes	/	/



# WT16R MULTIPURPOSE AND RECHARGEABLE WORK LIGHT



- Combines spotlight, floodlight and yellow flash in one.
- Super magnets are placed in the back and tail of the light for metal connection.
- Widened stainless steel body clip for firm connection to pack and pocket.
- Battery level indication for instant checking of remaining battery level.

The Fenix WT16R combines spotlight, floodlight and yellow flash, the innovative COB (Chip On Board Light) side light allows for reliable lighting and safe warning. The magnetic back is perfect for hand-free use; you can either tail stand the light or use the heavy-duty body clip to hold the flashlight in your pocket. A third option is to attach the flashlight to a nearby metal surface with the magnetic tail. The WT16R LED work light will become your essential tool to use around the house or out in the field, especially for kinds of industrial workplaces.








SIZE: 5.00" x 1.46" x 1.02" / 127 x 37 x 26 mm WEIGHT: 4.55 oz / 129 g (including battery)

'n		
	<b>Fill</b>	IP66
		1x2000mAh

	Spotlight High	Spotlight Med	Spotlight Low	Floodlight High	Floodlight Low	Floodlight Yellow Flash
OUTPUT	300 lumens	100 lumens	30 lumens	300 lumens	100 lumens	10 lumens
RUNTIME	3 hours 50 minutes	9 hours 20 minutes	30 hours	3 hours 50 minutes	9 hours 20 minutes	1







105° adjustable head for use at different angles.

Magnetic tail for hands-free use.

Magnetic charging with the included magnetic charging cable.

| **SIZE:** 5.33" x 1.16" x 0.95" / 135.3 x 29.4 x 24.1 mm | **WEIGHT:** 4.83 oz / 137 g (including battery)



IP66
1x18650

The Fenix WT25R rechargeable pivoting flashlight is the specifically designed multifunctional workhorse for industrial maintenance and operations. What makes the WT25R special is the ability to angle the head of the flashlight up to 105°, allowing for multiple lighting directions. You can attach the flashlight to a nearby metal surface with the magnetic tail. The WT25R features magnetic charging with the included 3400mAh rechargeable Li-ion battery. The Fenix WT25R LED work light will become your favorite tool to use around the house or out in the field, especially for kinds of industrial workplace.










# **GL Series**

Fenix's newly developed professional tactical light series. Using advanced technology to create a compact high-performance tactical light suitable for full-size guns. It has superstrong white light and long-range beam, which is capable of fast and accurate aiming in low-light environments. It is suitable for all kinds of law enforcement, personal defense, competitive shooting, hunting, etc.

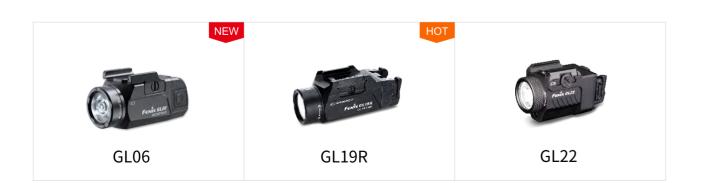

GL06 POCKET PISTOL LIGHT

~~	IP68
	1X16340/1XCR123A



Fenix GL06 is a quick-release pistol light specially designed for pocket pistols. The GL06 model fits universal Glock rails or Picatinny rails, and the GL06-365 model fits SIG-P365 rails.


- Max 500 lumens output and 120 meters beam distance.
- Designed for pocket pistols.
- Quick-release design.
- Compatible with SIG Sauer P365.

| SIZE: 2.40" x 1.14" x 1.26" / 61 x 29 x 32 mm | WEIGHT: 1.94 oz / 55 g (excluding battery)




- ▲ GL00-303
- ▼ GL06



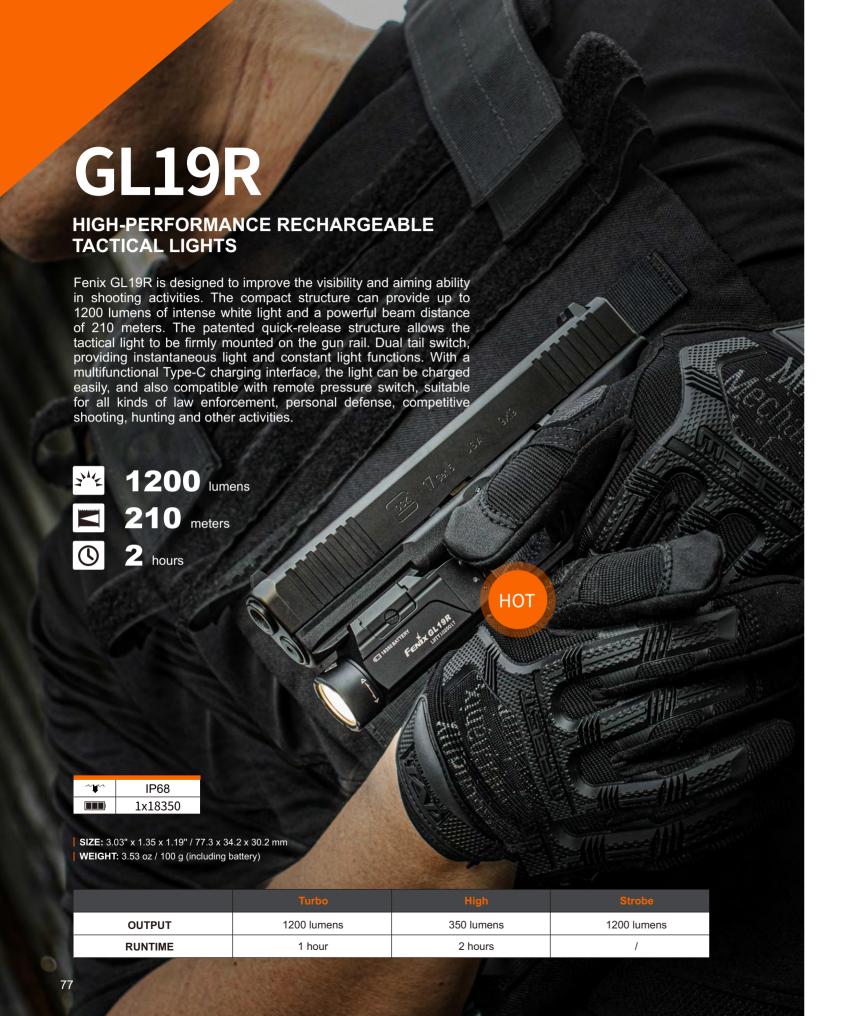



























- Precise red laser sight.
- Design for guns with tactical rails.
- Two-handed operation with dual tactical tail switch.
- Instant strobe.

| SIZE: 2.64" x 1.65 x 1.22" / 67 x 42 x 31 mm | WEIGHT: 3.32 oz / 94 g (including battery)



THE STATE OF THE S	IP66
	1x16340/ 1xCR123A

	White Light	Red Laser Light	Strobe
OUTPUT	750 lumens	1	750 lumens
RUNTIME	35 minutes	17 hours	1

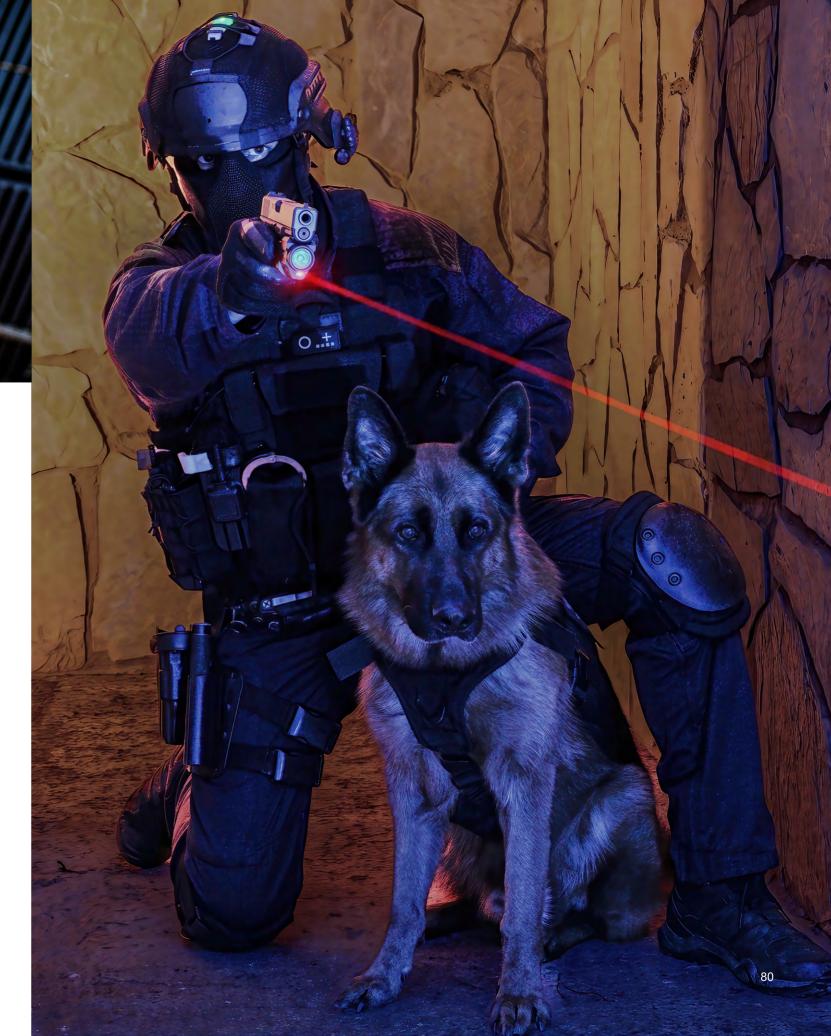





HL16 LIGHTWEIGHT TRAIL RUNNING HEADLAMP

File S	IP66
	3XAAA



- Max 450 lumens output and 104 meters beam distance.
- White and red light sources for a variety of lighting demands.
- Multiple brightness levels to meet different environmental needs.

SIZE: 2.52" x 1.73" x 1.06" / 64 x 48 x 27 mm

WEIGHT: 3.26 oz / 58 g (excluding battery)

83

Replaceable battery design.

No.

The HL16 is a multipurpose AAA battery-powered headlamp that can shine a maximum of 450 lumens for an ultra-long runtime of 100 hours. The convenient dual switch quickly controls four brightness levels of white light mode and red light, SOS of red light mode. Made from high-strength aluminum and silicone, this tough little headlamp weighs only 58 g and is waterproof and dustproof. And the extremely comfortable, stay-put, perforated headband make this headlamp perfect for all kinds of activities - running, hiking, camping, and climbing.

36mm widened design - stable and reliable.

36mm Ooo. FENIX C









- Max 500 lumens output.
- Lockout function avoids accidental activation.
- Dual switch for easy and fast operation.
- Micro USB rechargeable, 5V/1A for direct charging.
- Single-handed operation with the new SPORT Headband Fit System.

File State of the	IP66
	1x1300mAh /3xAAA

84

SIZE: 2.70" x 1.85" x 1.55" / 68.5 x 45 x 39.5 mm WEIGHT: 2.23 oz / 63.2 g (excluding battery)

Utility Model Patent ZL 20142020240
-------------------------------------

	Spotlight High	Spotlight Med	Spotlight Low	Floodlight Low	Floodlight SOS
OUTPUT	500 lumens	200 lumens	70 lumens	30 lumens	4 lumens
RUNTIME	3 hours	8 hours	20 hours	30 hours	300 hours

HL32R V2.0 HIGH-PERFORMANCE LIGHTWEIGHT HEADLAMP

File State of the	IP66
	1x1900mAh/3xAAA

34 800 lumens

**125** meters

150 hours

- Max 800 lumens output.
- Spotlight and floodlight.
- Frequency sensing: the brightness changes along with the speed.
- Compatible with 3 x AAA batteries.

SIZE: 2.60" x 1.77" x 1.18" / 66 x 45 x 30 mm WEIGHT: 2.72 oz / 77 g (excluding battery)

ility Model Patent ZL 202020454776.1

# HL40R ALL-ROUND ROTARY FOCUSING HEADLAMP

IP66 2000mAh



51/2 600 lumens

**147** meters

**© 200** hours

- Max 600 lumens output.
- One-handed rotary focusing of spotlight and floodlight.
- Overlapping headband, large bearing area.
- Micro USB charging.


85


■ Battery level indication; lockout function.


**SIZE:** 2.68" x 2.13" x 1.65" / 68 x 54 x 42 mm WEIGHT: 4.13 oz / 117 g (excluding battery)







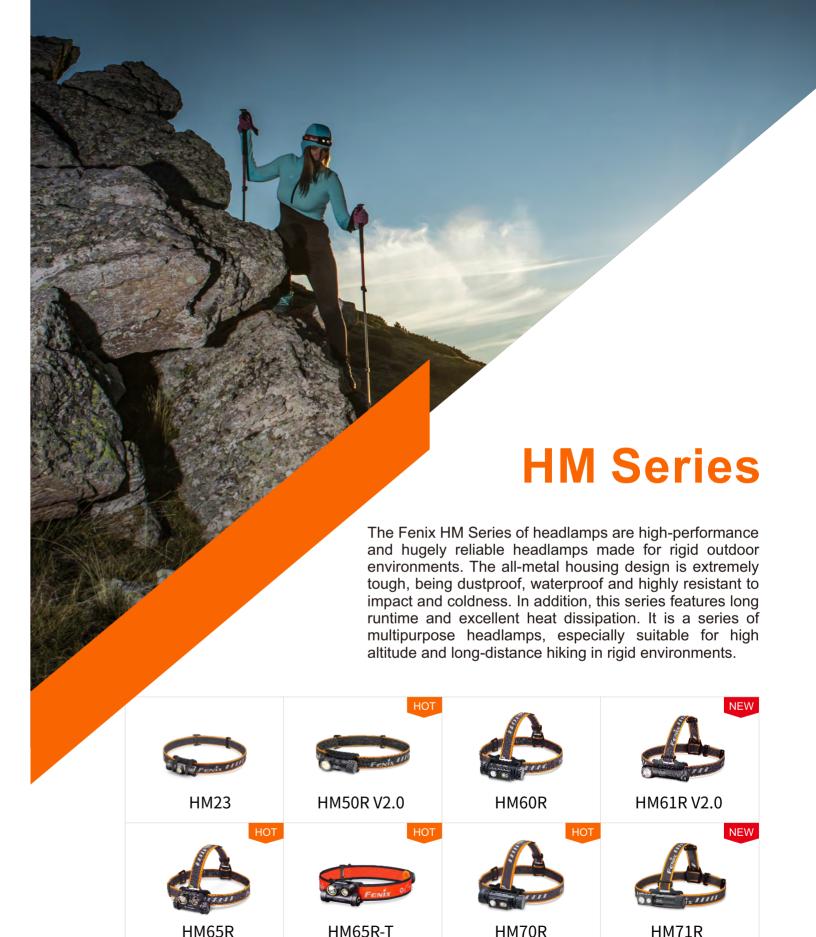


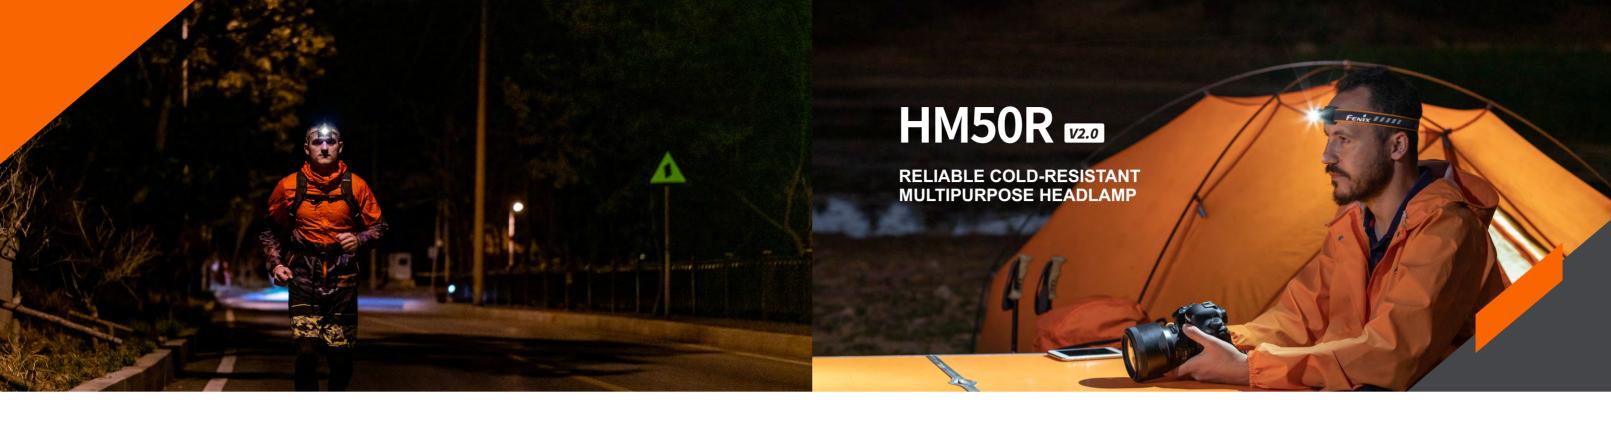

# HM23 COMPACT AND ULTRALIGHT HEADLAMP

IP68 1xAA





- 180° adjustable angle.
- Three output levels for kinds of lighting demands.
- One-switch control for easy and fast operation.
- Low-voltage warning.


SIZE: 2.74" x 1.57" x 1.26" / 69.5 x 40 x 32 mm

WEIGHT: 2.15 oz / 61 g (excluding battery)



ZL 201720607070.2 ZL 201420202409.7





Max 700 lumens output for kinds of outdoor lighting needs.

■ White and red light sources for different

■ USB Type-C charging for convenient use.

Cold-resistant ability.

SIZE: 2.52" x 1.42" x 1.26" / 64 x 36 x 32 mm WEIGHT: 2.75 oz / 78 g (including battery)



lity Model ZL 201720607070.2 ZL 201420202409.7

IP68 1x16340/1xCR123A

The Fenix HM50R V2.0 is a rechargeable dual-purpose headlamp. One 16340 rechargeable Li-ion battery is included or you can use one CR123A lithium battery to power it. This headlamp is power-packed throwing a 700 lumens beam to a maximum distance of 115 meters. The HM50R V2.0 is outstanding with its solid construction and lightweight size, plus it is detachable to be used as a mini flashlight. This rechargeable headlamp combines white and red lights, comes with a USB Type-C charging cable and features an IP68 rating, all of which make the Fenix HM50R V2.0 perfect for camping, hiking or working in rigged environments.



















- Spotlight, floodlight and red light combined.
- Frequency sensing: the brightness changes along with the speed.
- Hidden inner waterproof USB Type-C charging interface.
- Made of quality PC and aluminum, lightweight and wear-

Utility Model Patent ZL 201720607070.2

| SIZE: 3.35" x 1.77" x 1.77" / 85 x 45 x 45 mm WEIGHT: 5.54 oz / 157 g (including battery)



~ <b>J</b>	IP68
	1x18650

	Spotlight Turbo	Spotlight High	Spotlight Med	Spotlight Low	Floodlight High	Floodlight Med	Floodlight Red Light	Floodlight Red Flash
OUTPUT	1300 lumens	350 lumens	130 lumens	30 lumens	350 lumens	70 lumens	5 lumens	5 lumens
RUNTIME	2 hours	8 hours	18 hours	54 hours	8 hours	24 hours	100 hours	200 hours









**300** hours

- Max 1600 lumens output and 300 hours runtime.
- Can be used as a flashlight.
- White and red light sources for a variety of lighting demands.
- Magnetic charging; battery level indication; charging indication.
- Magnetic tail, right-angled lighting.

Utility Model Patent ZL 202022806700.3


SIZE: 3.98" x 1.77" x 1.42" / 101 x 45 x 36 mm WEIGHT: 3.67 oz / 104g (excluding battery)



~#~	IP68
	1x18650/2xCR123A




# HM65R TRI-PROOF MAGNESIUM HEADLAMP WITH DUAL LIGHT SOURCES





- Max 1000 lumens output.
- Separately controlled spotlight and floodlight.
- Dustproof, waterproof and impact-resistance.
- Quality aluminum, magnesium and PC material, lightweight and durable.
- USB Type-C fast charging.



Fenix HM65R is a headlamp with IP68 rated protection that suits close-in and long-distance illumination. Uses white and neutral white LEDs, delivering a max output of 1000 lumens, a max beam distance of 163 meters, and a max runtime of 280 hours. Separately controlled dual switches, max 1000 lumens of spotlight, max 400 lumens of floodlight. Powered by a single 18650 rechargeable Li-ion battery, 2 CR123A Lithium batteries can be used as well; USB Type-C charging, HM65R is your unmatched choice for long-time and high-intensity outdoor activities.














ility Model ZL 201720607070.2 / ZL 201420476030.5 ZL 201420202409.7

SIZE: 3.17" x 2.17" x 1.57" / 80.5 x 55 x 40 mm WEIGHT: 3.42 oz / 97 g (excluding battery)

T.	IP68
	1x18650/ 2xCR123A



The Fenix HM65R-T rechargeable headlamp is designed for trail running. This new Fenix headlamp is constructed from ultra-lightweight magnesium material. With two LEDs, the HM65R-T can reach 1300 lumens. With an all-new body designed from magnesium, the Fenix HM65R-T headlamp has IP68-rated protection, and 2 meters of impact resistance. The included hollow headband provides comfort and adjustability for a perfect fit in every situation. It is recommended to use the Fenix HM65R-T for trail running trips where you will need to light your path quickly and hands-free.



- Lightweight magnesium material.
- New SPORT Headband Fit System.
- Ultra-long runtime for professional races.
- Hidden USB Type-C charging port fast charging.
- Widened headband design stable and reliable.








iF DESIGN Award Silver Award in Asia Outdoor Industry Award

Utility Model Patent	ZL 201921909465.3
•	

| SIZE: 3.15" x 1.85" x 1.54" / 80 x 47 x 39 mm | WEIGHT: 3.21 oz / 91 g (excluding battery)

	Spotlight High	Spotlight Med	Spotlight Low	Floodlight High	Floodlight Med	Floodlight Low
OUTPUT	1300 lumens	400 lumens	130 lumens	400 lumens	70 lumens	5 lumens
RUNTIME	4 hours	12 hours	24 hours	12 hours	33 hours	300 hours

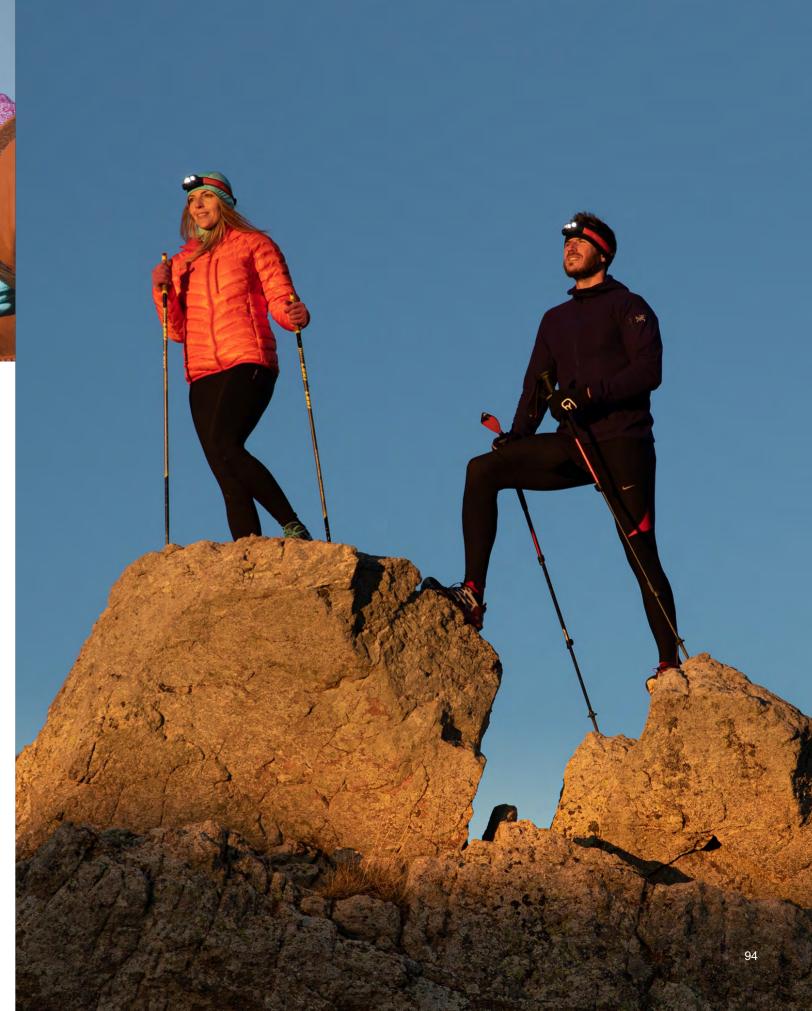



# TRIPLE LIGHT SOURCE RECHARGEABLE 21700-POWERED HEADLAMP

The Fenix HM70R is an all-metal headlamp that provides long-distance and wide-range lighting. This versatile headlamp is fitted with red and white light sources plus a red flash mode for alerting purposes. Powered by a powerful 21700 battery and it is compatible with a 18650 battery (with an ALF-18 battery holder) as well. It is rechargeable with a hidden USB Type-C charging port for go-anywhere charging. Featuring a large-sized switch, impact-resistant to 2 meters, it can be your trustworthy lighting tool for high-intensity outdoor work and it is ready to travel with you to a variety of challenging activities.

Utility Model Patent ZL 201720607070.2

1600 lumens

**186** meters

**100** hours

SIZE: 3.72" x 2.01" x 1.81" / 94.5 x 51 x 46 mm WEIGHT: 7.27 oz / 206 g (including battery)

FENIX III

	Spotlight Turbo	Spotlight High	Spotlight Med	Spotlight Low	Floodlight Red Light	Floodlight Med	Floodlight High	Floodlight Red Flash
OUTPUT	1600 lumens	500 lumens	150 lumens	30 lumens	5 lumens	70 lumens	400 lumens	5 lumens
RUNTIME	4 hours	6 hours	30 hours	100 hours	400 hours	48 hours	8 hours	800 hours
















# HM71R HIGH-PERFORMANCE RECHARGEABLE INDUSTRIAL HEADLAMP

~ <b>J</b>	IP68
	1X21700



- Max 2700 lumens output.
- Max 400 hours runtime.
- Multiple wearing ways for different applications.



Utility Model Patent ZL 202022806700.3


SIZE: 4.13" x 1.81" x 1.77" / 105 x 46 x 45 mm WEIGHT: 7.32 oz / 207.5 g (including battery)




The Fenix HM71R is a high-performance rechargeable headlamp for industrial lighting scenarios which includes a magnetic base and belt clip for continued hands-free use. Combined spotlight and floodlight, the HM71R headlamp has four lighting modes with a max output of 2700 lumens. Powered by a high-capacity 21700 battery, this light can emit light for up to 400 hours. With a battery level indicator, IP68-rated waterproof and dustproof, and impact-resistant to 2 meters. This excellent headlamp is the ultimate hands-free lighting tool for extended work.

# **HP Series**

Taking full advantage of modern lighting technology and creative design, Fenix successfully develops the HP series headlamps with outstanding performance. By using a metal housing and constant brightness regulating circuit, Fenix's HP series produces much brighter beams and offers more functions, longer runtime and better durability than competitors. With IP66 ratings, the Fenix HP models will satisfy your various lighting needs whether searching and rescuing, caving, cycling, mountaineering and hiking, etc.

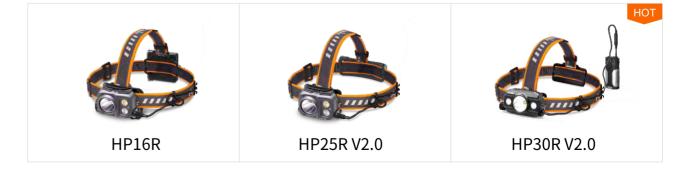

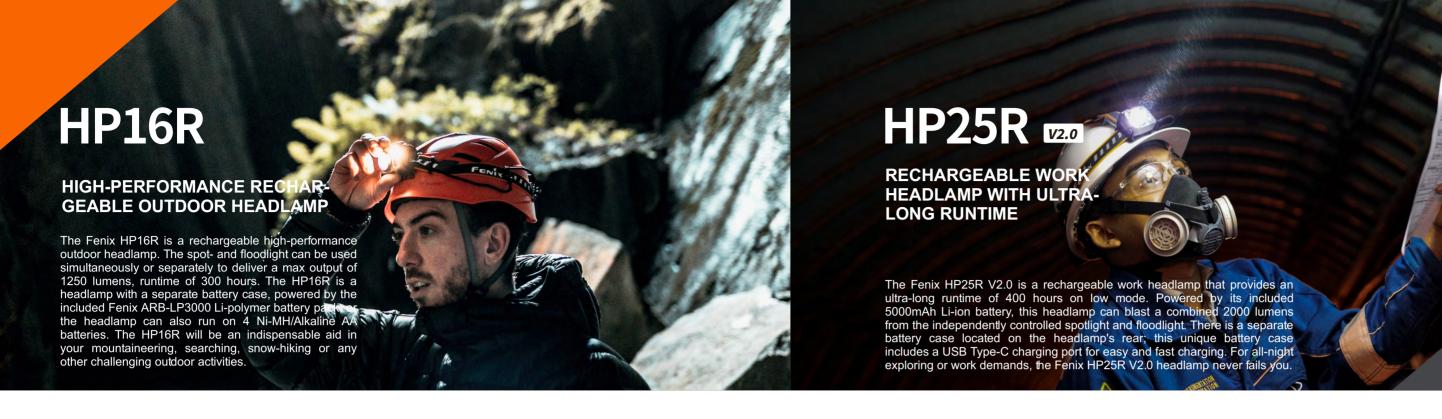



**1250** lumens



**255** meters

**300** hours

- Max 1250 lumens output.
- Two power sources for free choice.
- USB Type-C charging port fast charging.
- Separately controlled dual switch; lockout function avoids accidental activation.
- Made of quality plastics and aluminum, integrated die-casting for better heat dissipation and safety performance.



Itility Model Patent ZL 201720607070.2

SIZE: 2.44" x 1.85" x 1.26" / 62 x 47 x 32 mm WEIGHT: 7.62 oz / 216 g (including battery)







/4xAA
I/4XAA














**1600** lumens



**290** meters



**400** hours




- Spotlight, floodlight and red light.
- High-reliability aluminum offers excellent heat dissipation.
- USB Type-C charging port fast charging.
- Powered by a 21700 battery and compatible with a 18650 battery.



	IP66
	1x21700/1x18650

SIZE: 2.36" x 1.85" x 1.30" / 60 x 47 x 33 mm WEIGHT: 8.40 oz / 238 g (including battery)

ity Model Patent ZL 201720607070.2

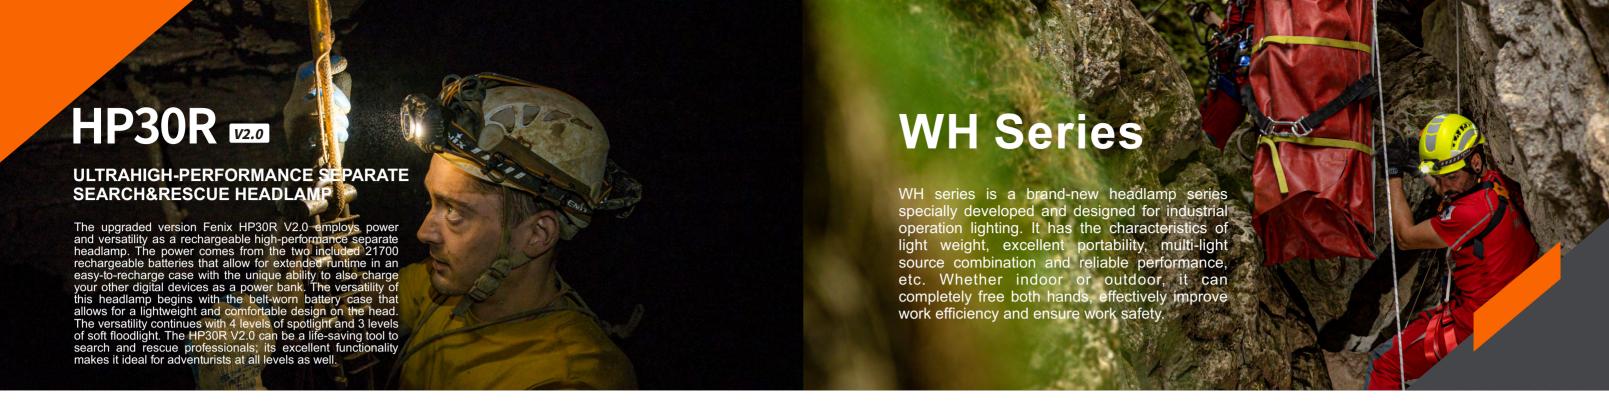












- Max 3000 lumens output.
- Twisty switch for easy and fast
- A waist-worn battery case can be placed in pocket and pack.
- USB Type-C charging port fast charging.
- Power bank function.

| SIZE: 3.62" x 2.20" x 1.73" / 92 x 56 x 44 mm WEIGHT: 15.41 oz / 437 g (including battery)

IP66
2x21700

# WH23R SMART INDUCTION HEADLAMP

IP66
2000mAh





- Max 600 lumens output and 100 meters beam distance.
- Spotlight, floodlight and combined output.
- Rotary switch for precise operation even with gloves.
- Gesture sensing for on/off.
- The center-rotating headlamp holder balances and improves the comfort of wearing.



SIZE: 3.41" x 1.77" x 1.72" / 86.5 x 45 x 43.72 mm WEIGHT: 4.06 oz / 115 g (including battery)

WH23R is a dual-light source headlamp with a gesture-sensing function. When the sensor function is activated, you can turn on or off the headlamp with a wave of hands to avoid dirtying the headlamp. The combined rotary switch can be operated conveniently and quickly even with gloves. The three modes of spotlight, floodlight and combined light can be freely selected, which can easily cope with various complex working environments.

	Spotlight High	Spotlight Med	Spotlight Low	Floodlight High	Floodlight Med	Floodlight Low	Spotlight + Floodlight Turbo
OUTPUT	300 lumens	120 lumens	30 lumens	300 lumens	70 lumens	5 lumens	600 lumens
RUNTIME	6 hours 19 minutes	9 hours 32 minutes	35 hours 57 minutes	6 hours 19 minutes	15 hours 36 minutes	150 hours	3 hours 49 minutes




# **BC** Series

With rich experience in bicycle light design and the use of advanced patented technologies such as anti-glare, intelligent wireless control and two-step quick release, Fenix versatile bicycle lights are dedicated to cyclists of all types. Their durable construction allows them to withstand heavy use in harsh conditions, while their brilliant LED beams produce high outputs that can be adjusted to suit your needs. With a Fenix bicycle light, you can expect the best and the brightest, with practical features, no matter where your bike takes you. From deserted night-time trails to urban environments, a Fenix bicycle light helps you see and be seen in the dark so you remain safe on your cycling adventure. No matter where your cycling takes you, you can depend on a Fenix bike light to illuminate your way.



BC05R ULTRA-COMPACT RECHARGE-ABLE BICYCLE TAILLIGHT

IP66 400mAh



- Max 15 lumens output and 50 meters alerting distance.
- Battery level indication.
- USB Type-C charging.
- Matched with the body clip, can be used as a backpack light, or chest light.
- Single switch for easy and fast control.

SIZE: 2.01" x 0.87" x 0.87" / 51 x 22 x 22 mm WEIGHT: 0.99 oz / 28 g (including battery)



The upgraded Fenix BC05R V2.0 version is an ultra-compact rechargeable bicycle taillight with an eye-catching red light built for cycling commuters and lovers. Being seen far away in traffic with 15-lumen red light and 180° lighting angle will help make your bicycle commute much safer and provide peace of mind on your cycling trip. Quickly charge the BC05R V2.0 via the USB Type-C interface, the built-in 400mAh Li-polymer battery delivers a max runtime of 120 hours. With the included body clip, the versatile taillight can be used as a chest lamp or backpack light.



BC21R HIGH-PERFORMANCE ROAD CYCLING BICYCLE LIGHT


1	IP68
	1x18650





IP66
1x2600mAh




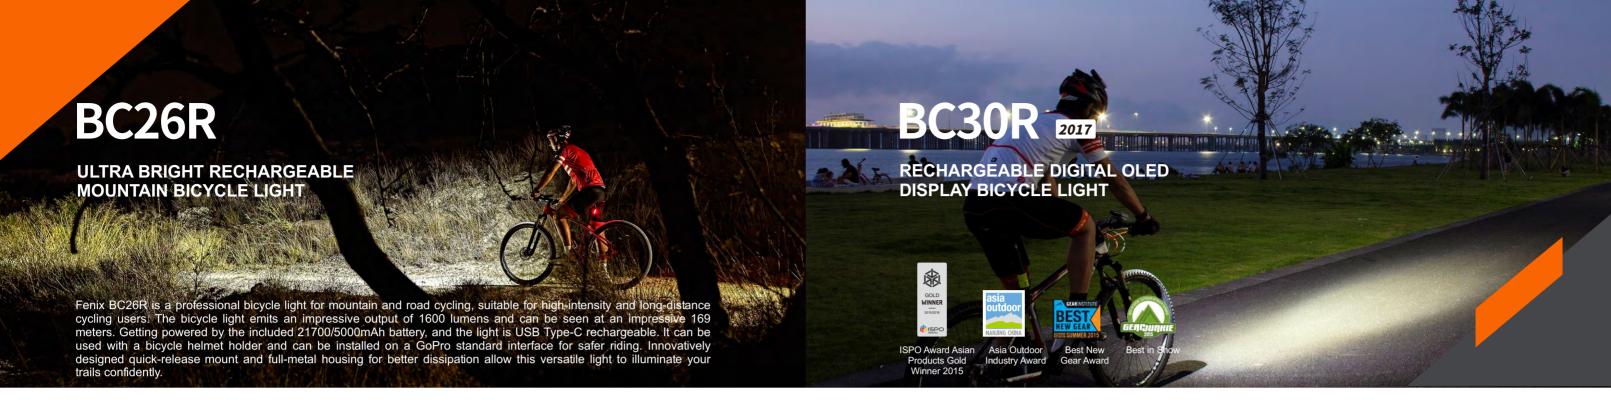









- Max 1600 lumen output and 169 meters beam distance.
- USB Type-C charging.
- Quick-release design, two-step assembly and disassembly.
- Easy and fast operation with a single switch.
- Flash mode warns backside approaching drivers and passengers.

SIZE: 4.45" x 1.06" x 1.14"/113 x 27 x 29 mm WEIGHT: 5.47 oz/155 g (including battery)



	Turbo	High	Med	Low	Flash
OUTPUT	1600 lumens	600 lumens	200 lumens	50 lumens	600 lumens
RUNTIME	3 hours 30 minutes	9 hours 30 minutes	18 hours	65 hours	/

The BC30R 2017 is a Micro USB rechargeable bicycle light that features a digital display screen for confidence-inspiring readings. It is fitted with two Cree XM-L2 U2 neutral white LEDs and emits a max output of 1800 lumens with a featured dual distance beam system.

OLED display panel, which displays the remaining runtime at the current output level, and the battery percentage clearly, as riders need not only comfortable lighting but also need to know the remaining runtime, whether during mountain biking or urban riding.



| SIZE: 4.49" x 1.97" x 1.25" / 114 x 50.5 x 31.8 mm | WEIGHT: 7.82 oz / 221.6 g (including battery) IP66 ■■ 1x5200mAh



CAMPING LANTERNS



**2200** lumens

**187** meters

50 hours



Max 2200 lumens output. Smart wireless control switch.

All-metal housing.

Quick-release bicycle mount, easy to assemble and disassemble.

Dual Distance Beam System.

| **SIZE:** 4.72" x 1.99" x 1.25" / 120 × 50.5 × 31.8 mm WEIGHT: 5.43 oz / 154 g (excluding battery)

0	
~ <b>t</b> ~	IP67
	2x18650/4xCR123A

	Burst	High	Med	Low	Eco	Flash
ОИТРИТ	2200 lumens	1500 lumens	600 lumens	200 lumens	50 lumens	600 lumens
RUNTIME	1	2.3 hours	6 hours	16 hours	50 hours	1

**CL Series** 

Fenix's camping lanterns are all about innovation and provide all-rounder performance. From the icy cold North Pole to the rain-soaked tropical forests, Fenix's all-weather waterproof lanterns provide thorough, uncompromising performance. Features listing from an exclusive dual-fuel battery compartment to multifaceted globe and a magnetic base, Fenix's camping lanterns keep your adventure going, anywhere, anytime!



CL20R










CL30R





Fill I	IP66
	1x1600mAh





- White and red light sources.
- Magnetic bottom and hanging loop.
- Micro USB rechargeable.
- Made of quality plastics and high trans-parent material smooth anti-glaring beam.








SIZE: 2.83" x 1.97" x 1.63" / 72 x 50 x 41.5 mm WEIGHT: 3.21 oz / 91 g (including battery)







- Max 400 lumens output and 25 meters beam
- Top magnetic absorption and tripod socket for effective light fixation and light source control.
- White and red light sources.
- Micro USB rechargeable.
- Excellent cold-resistant design.



SIZE: 3.82" x 1.93" x 1.93" / 97 x 49 x 49 mm WEIGHT: 4.09 oz / 116 g (excluding battery)

			407
	ш		Green
FENÎX	FENIX	FENIX	Red Black

	IP66
	1x18650/2xCR123A

	High	Med	Low	Front	Down I	Down II	Red Light	Red Flash
OUTPUT	400 lumens	150 lumens	40 lumens	25 lumens	3 lumens	25 lumens	1 lumen	1 lumen
RUNTIME	5 hours	15 hours	30 hours	58 hours	240 hours	58 hours	200 hours	400 hours

# CL28R

### MULTIFUNCTIONAL OUTDOOR LANTERN

The Fenix CL28R outdoor lantern certainly is a versatile powerhouse that brightly illuminates entire rooms and charges other electronic devices at the same time. You are provided with a maximum of 2000 lumens which portrays light at a 58 meters distance. This lantern features two rotary switches that enable stepless brightness adjustment of both white and red lights. This rechargeable lantern has a USB-C charging port to charge the built-in 10000mAh batteries and USB-A / USB-C discharging ports to charge your phone, speaker or tablet. Additional advantages include a 360° rotary light handle for all-around lighting, IP66-rated protection and red alerting flashing. You can attach the Fenix CL28R to a tripod or hang it. This versatile lantern is great for car camping, rustic cabin stays, and even power outages. is great for car camping, rustic cabin stays, and even power outages.



### HIGH-PERFORMANCE CHARGING AND DISCHARGING CAMPING LANTERN

The Fenix CL30R rechargeable camping lantern offers flexibility in power, charging and brightness levels. This versatile lantern not only features a Micro USB port for recharging, but it is the first Fenix lantern that serves as an independent charging station for other devices. The powerful CL30R delivers a maximum output of 650 lumens, which illuminates an area 35 meters in diameter. Powered by one, two or three 18650 rechargeable batteries, this lantern offers five brightness levels, Turbo and Flash. The CL30R features a cold-resistant battery compartment for all-season use, charging and battery-level indicators for accurate operation, and a hanging lanyard and tripod socket for flexible lighting options.







■ Dual rotary switches allow free adjustr brightness and color temperature.

■ 360° rotary handle makes all-arour

USB Type-C charging port features indication and low-voltage warning.

■ The lantern handle can be attached metal surfaces.

	FeNIX A
_	
am distance.	
tment of the	
und lighting	ALL STATES
es charging	
to magnetic	

Patent ZL 2021232781024 ZL 202130698237.2

SIZE: 3.94" x 3.82" x 1.61" / 100 x 97 x 41 mm WEIGHT: 13.26 oz / 376 g (including battery)


IP66
2VE000ma 4 h
2X5000mAh


		WHITE LIGHT	RED LIGHT			
	High	Med	Low	Red Constant-on	Red Flash	
OUTPUT	2000 lumens	1000 lumens	10 lumens	9 lumens	9 lumens	
RUNTIME	9 hours	10 hours	360 hours	170 hours	340 hours	











- Independent circuit design.
- Micro USB charging and discharging function.
- Built-in hanging loop and tripod socket interface.
- Can be floated on the water.





SIZE: 5.35" x 3.66" x 3.66" / 136 x 93 x 93 mm WEIGHT: 14.5 oz / 412 g (excluding battery)

~#~	IP67
	1~3x18650



### **Batteries** ••••





### **Rechargeable Batteries**

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short-circuiting caused by collision or impact.

- Triple overheat design, safe and reliable.
- Built-in overcharge and overdischarge protection circuit to ensure battery life.
- The circuit board is fully protected, with high reliability and

Model	Type	Capacity	Voltage
ARB-L14-1600U	14500+USB	1600 mAh	1.5V
ARB-L14-1050	14500	1050 mAh	3.6V
ARB-L16-700P	16340	700 mAh	3.6V
ARB-L16-700UP	16340+USB	700 mAh	3.6V
ARB-L18-2600	18650	2600 mAh	3.6V
ARB-L18-2600U	18650+USB	2600 mAh	3.6V
ARB-L18-3000P	18650	3000mAh	3.6V
ARB-L18-3400	18650	3400 mAh	3.6V
ARB-L18-3400U	18650+USB	3400 mAh	3.6V
ARB-L18-3500	18650	3500 mAh	3.6V
ARB-L18-3500U	18650+USB	3500 mAh	3.6V
ARB-L21-4000P	21700	4000 mAh	3.6V
ARB-L21-5000U	21700+USB	5000mAh	3.6V
ARB-L21-5000 V2.0	21700	5000 mAh	3.6V
ARB-L21-5000B	21700+USB	5000 mAh	3.6V
ARB-L21-5000BL	21700+USB	5000 mAh	3.6V
ARB-L21-5800	21700	5800 mAh	3.6V



#### ALF-18 (Battery Holder)

The Fenix 18650 Li-ion battery can be used as a 21700 Li-ion when combined with this battery holder.

- PC + ABS materials reliable and durable.
- Copper plated positive contact excellent performance in conductivity.
- Size: 2.41" x 0.85" / 61.2 x 21.5 mm.
- Weight: 0.22 oz / 6.1 g.

### Chargers ==

Fenix provides different kinds of multifunctional chargers for various battery types. Which all feature readable charging indication, and are guarded with multiple protection that effectively prevents overcharging and short circuit.



#### **ARE-A2 Dual Channel Charger**

Fenix ARE-A2 is a dual-channel charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries.
- AC and DC charging modes.
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/ Ni-Cd).
- Rated output power: 3W (Ni-MH/ Ni-Cd), 8.4W (Li-ion).
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection



#### **ARE-A4 Multifunctional Charger**

Fenix ARE-A4 is a four channels smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries.
- AC and DC charging modes.
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/ Ni-Cd).
- Rated output power: 6W (Ni-MH/ Ni-Cd), 16.8W (Li-ion).
- Built-in short circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



#### **ARE-D1 Single Channel Multifunctional Charger**

Fenix ARE-D1 is a single channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging and discharging status.
- 0.5/1.0/2.0A three charging current for option
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W(Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection



#### **ARE-D2 Dual Channel Multifunctional Charger**

Fenix ARE-D2 is a dual-channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging and battery status clearly.

- Micro USB charging and USB discharging.
- LCD screen for battery level, charging and discharging status.
- 0.5/1.0/2.0A three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.



#### **ARE-X1 V2.0 Single Channel Smart Charger**

The Fenix ARE-X1 V2.0 is a single channel smart charger that features USB Type-C charging and USB discharging function, designed for 18650, 21700 and 26650 batteries, and provides charging, discharging, and battery power detection.

- Compatible with one 18650, one 21700 or one 26650 rechargeable Li-ion battery.
- Supports USB Type-C charging and USB discharging.
- LED charging/discharging indicator; LED battery power detection.
- Short circuit, over-current, over-voltage and reverse polarity protection.
- Microcomputer chip controlled, digitally regulated charging to extend battery life.







#### **AOD-S V2.0/AOD-M Diffuser Tip**

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Durable, impact-resistant and fireproof to V2 Standard.
- Easy operation.
- Imported novel optical material guarantees quality.



#### **AOF-S+/AOF-M Filter Adapter**

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with an anti-reflective coating that provides heat resistance and maximum light penetrability.
- Germany's Bayer PC 2805 material, aging and impact resistant.
- Anti-roll design, easy to assemble and disassemble.

#### **AOT-S+/AOT-M Traffic Wand**



- Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best option for emergency situations and traffic control.
- German Bayer PC2805 material.
- High compressive strength, impact resistance.
- High-temperature resistance and benign thermal stability.
- Easy to assemble and disassemble.

### Tactical Accessories 🌣

The Fenix tactical accessories enhance your tactical flashlight's capabilities for any tactical situation.



#### **AER-02 V2.0 Tactical Remote Pressure Switch**

The Fenix AER-02 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 25.4mm Diameter x 31.5mm Length.
- IP68-rated protection: 2 meters underwater
- Applicable to Fenix 18650-powered flashlights with a single tail switch.

# The swi sel

#### **AER-03 V2.0 Tactical Remote Pressure Switch**

The Fenix AER-03 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination and output selection (function may vary with flashlights).

- Ttactical Remote Pressure Switch.
- Tactical tail switch (round) for instant or constant activation.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 26.5mm Diameter x 32mm Length.
   IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with dual tail switch.



#### **AER-04 Remote Pressure Switch**

The new Fenix AER-04 remote pressure switch is specialized in tactical flashlights using 21700 battery. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a full-silent forward switch and a tape switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14" / 29mm.
- Applicable thread: Tr25.5 x 0.06" / 1.5 mm.
- Cable length: 9" / 230 mm.

- Full length: 13.39" / 340 mm.Weight: 1.48 oz / 42 g.
- Weight: 1.48 oz / 42 g.



#### **AER-05 Remote Pressure Switch**

The Fenix AER-05 remote pressure switch is specialized in tactical flashlights with APF circuits. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a silent pressure pad switch and a round tactical switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached /elcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14" / 29 mm.
- Full length: 13.4" / 340 mm. Weight: 1.48 oz / 42 g.
- Annlicable thread: Tr25.5 v 0.06" / 1.5 mm
- Cable length: 9" / 230 mm.



#### **AER-06s Remote Pressure Switch**

The Fenix AER-06s is a revolutionary control device for weapon-mounted electronic accessories. Shared USB Type-C port with GL19R, AER-06s has successfully reinvented how you interface with your GL19R. With the design of a single electronic switch, this remote button is ergonomically inclined at a 45-degree angle, which can realize functions such as momentary on, constant on or strobe, and supports activation of the highest brightness of the flashlight. At the same time, it has an IPX6 protection level regardless of battle environments. MIL-STD-1913 rail adapter base is included as standard, and the M-Lok rail adapter base is also attached as an accessory. There are two types of bases for you to choose from

- Size with MIL-STD-1913 rail adapter base: 1.50" x 1.34" x 1.10" / 38 x 34 x 28 mm.
- Size with M-Lok rail adapter base: 2.05" x 0.83" x 0.63" / 52 x 21 x 16 mm
- Weight with MIL-STD-1913 rail adapter base: 1.43 oz / 40.6 g.
   Weight with M-Lok rail adapter base: 1.11 oz / 31.4 g.



#### **ALG-00 Rail Mount**

ALG-00 features the quick detachable Picatinny rail design which suits tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5-26mm, and a wrench is needed when clipping flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all-black treatment without light reflection.



#### **ALG-05 Tactical Remote Pressure Switch Mount**

The Fenix ALG-05 tactical remote pressure switch mount is specially designed for Fenix AER series tactical remote pressure switches. It perfectly fits the Picatinny rail by a simple push; featuring convenient assembly and disassembly, the mounting position can be flexibly adjusted. Designed specifically for tactical lighting, the remote pressure switch is within easy reach, so the flashlight can be momentarily switched on with a press of the button. The whole body of the mount is made of aluminum alloy with hard-anodized finish, and it is not reflective in matte black, which meets the needs of tactical concealment



#### **ALG-06 Tactical Remote Pressure Switch Mount**

The ALG-06 tactical remote pressure switch mount can adapt the AER-02/03/04/05 remote pressure switch to the M-LOK rail, which is lightweight, and reliable.

- Lock fixation ensures no displacement.
- Size: 2.72" x 0.94" x 0.39" / 69 x 24 x 10 mm.
- Weight: 0.85 oz / 24 a.





#### **ALG-15 Rail Mount**

The ALG-15 rail mount can fit a flashlight with a head diameter of less than 40mm and a body diameter of 22.5-26mm on the Picatinny rail (MIL-STD-1913), making quick disassembly and assembly possible by means of a screw nut.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.

- Durable and wear-resistant material
- Size: 3.03" x 1.18" x 1.22" / 77 x 30 x 31 mm.
- Weight: 1.66 oz / 47g.



#### **ALG-16 M-LOK Quick-release Rail Mount**

The ALG-16 M-LOK guick-release rail mount can fit the flashlight with a head diameter of less than 40mm and a body diameter of 22.5-26mm on the M-LOK rail, making quick disassembly and assembly possible by hand.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting
- Compact and lightweight.

- Durable and wear-resistant material.
- Size: 1.85" x 1.65" x 1.18" / 47 x 42 x 30 mm.
- Weight: 1.76 oz / 50 a.



#### **ALG-18 Rail Mount**

The Fenix ALG-18 rail mount is a functional accessory that helps to perform tactical/hunting applications; which suits weapon barrels ranging from 18 - 22mm. The compatible flashlight body diameter ranges from 23.5 - 28mm with a light head diameter of less than 70 mm. Made of durable and high-strength aluminum, the easy operation effectively assists in tactical/hunting scenarios.

- Allows for quick assembly and disassembly of the gun barrels.
- Tool-free assembly and disassembly.
- Fits a variety of barrel dimensions.

- Size: 2.99" x 1.81" x 1.37" / 76 x 46 x 35 mm
- Weight: 3.10 oz / 88 g



#### **ALP-10S/10L Flashlight Holster**

The Fenix ALP-10 is a holster that is specifically designed for packing and protecting flashlights. The use of anti-tear nylon material features excellent abrasion resistance. Three layers of different materials are used, with one-time hot pressing, which is stylish and durable; the back webbing is designed with a combination of Velcro and nickel-plated metal button, ensuring strong stability and quick-release ability. The holster can be perfectly matched with the belt, backpack, and more. In this way, the flashlight is fully protected in a variety of scenarios such as law enforcement, outdoor lighting, searching and rescuing, etc.

- The use of anti-tear nylon material features excellent abrasion resistance
- Strong stability and quick-release ability.
- Stylish and durable.





#### **T6 Automatic Retracting Tactical Pen**

The Fenix T6 is a multifunctional self-defense tactical pen that is capable of illuminating, window breaking and writing. Its maximum brightness reaches 80 lumens, and it supports Type-C charging. This tough pen features a zirconium bead that can break glass and assist in escape from danger. Inside every pen is an imported Schmidt pen cartridge for smooth, effortless writing. As you can expect, this rugged, high-performance writing tool is tough enough to provide you with a tactical advantage in emergency situations.

- Removable Schmidt 6.8CM metal pen refill for self-defense.
- Automatic retracting ink tip for smooth writing.
- Made of A6061-T6 aluminum
- Premium type HAIII hard-anodized anti-abrasive finish.





#### **ALR-01 Tactical Flashlight Ring**

ALR-01 tactical flashlight ring provides users with a convenient and flexible flashlight operating experience to meet various holding needs. The ring is easy to disassemble and assemble. It is made of high-strength nylon. There are design grooves on both sides, which helps the belt clip find a suitable position. The raised finger tigers provide a force point for the fingers and can also be used as a strike point and a pressure point.

Applicable products:

TK Series :Tk16 V2.0/TK20R V2.0/TK22 TAC/TK30

PD Series -PD36R Pro





#### **ALP-20 Quick-pull Holster**

ALP-20 is a quick-pull leather case for duty flashlight. The whole is made of full-grain cowhide with a thickness of 3mm. The flashlight will not loosen after being inserted; it is a close-fitting concealed flashlight cover that is very suitable for casual clothes. Wear firmly, the flashlight will not shake even when running and under strenuous exercise. Body and thigh squeeze of the holster will not trigger the switch, and it is excellent to prevent accidental touch. It is recommended to use a 4 cm wide inner belt, or a nylon tactical inner belt, which is compatible with a maximum 55mm duty belt.

Applicable products:

TK Series :TK22UE/TK16 V2.0/TK20R V2.0 /TK30

PD Series :PD36R/PD40R

## Headband /Fanny Pack /Storage Bag



This is a series of accessories designed for outdoor activities such as running, all perfectly fit the body, and show a sense of sports fashion.



#### **AFB-10 Sports Fanny Pack**

The Fenix AFB-10 is a waterproof sports fanny pack with a large storage capacity. It features an adjustable waist strap and cross-shaped headphone hole, making running more enjoyable. In addition, a reflective logo ensures safer night running.

- Folded and tensile design, the storage capacity of the pack can be extended.
- The inside is TPU waterproof layer, plus a waterproof zipper, all of which makes the pack resistant to water and sweat.
- Hidden hole for headphone usage.
- High-elastic adjustable belt for a closed and personal fit.
- Reflective Fenix logo ensures safer night outdoors.
- 4 colors for options: black, gray, blue, orange.



#### AFH-02 /AFH-03 Sports Headband

- Made of high-elastic and air-permeable nylon.
- Sweat-channeling silicone lines. Safe reflective logo and lines.
- Hollow design breathable and comfortable

### **AFH-10 Sports Headband**



The Fenix AFH-10 is a high-elastic quick-drying sports headband, made of air-permeable nylon fabric. The sweat-channeling silicone lines, reflective logo and lines make night activities safer.

- 70% nvlon. 30% spandex high-elastic and air-permeable
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- 4 colors for options: black, gray, blue, orange.



#### APB-20/ABP-30 Headlamp Storage Bag

- Made of high-strength nylon cloth lightweight and wear-resistant properties.
- Increased and large storage space, inner mesh cloth bag enough for headlamp and battery storage.
- 50mm long lanvard.
- High-strength zipper
- Applicable headlamps: HL10, HL12R, HL15, HL16, HL18R, HL23, HL26R, HM61R, HM65R, etc.
- 1000 times cycle use; 1-year free repair, lifetime limited warranty.





#### **GS10 Gun Safe Box**

Fenix Gunsafe 10 is a gun safe box with multiple unlocking methods. The main structure is made of high-thickness SPCD steel plate, which is sturdy and reliable, and is resistant to falling and smashing. The inner spring structure design can not only quickly switch the box without pinching hands, but also enhance the safety of the safe box. It also has a retractable handle design, three unlocking methods and an independent internal lighting system.

- Fingerprint lock, touch key lock, mechanical lock three unlocking methods.
- There is a Type-C charging port outside the box and a built-in 5000mAh Li-ion battery.
- With 3-5 lumens lighting function in the box, it lights up when open the box and goes out when it is closed.

## Mount /Hook /Lanyard



The multifunctional mount and hook accessories provide more use patterns for all products. with flexible assembly ways.

#### **ALB-10 Quick-release Bicycle Mount**

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release.
- Fits flashlights with a diameter of 18mm 26mm.
- Rotating 30-degree design adjusts to any locking angle.
- A high-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar.
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain.



#### **ALB-20 Multipurpose Snap Hook**

- Quick-release, stable wearing.
- Bottle opener.
- Straight screwdriver
- Non-magnetizable.
- Size: 2.12" x 1.13" x 0.14"/ 53.8 x 28.6 x 3.5 mm.
- Weight: 0.32 oz / 9 g.
- Material: Titanium alloy TC4.





#### **ALD-05 Flashlight Helmet Holder**

- Anti-static rubber fixing strap, compatible with all types of helmets.
- Adjustable clamping caliber suitable for flashlights with an outer body diameter of 20-28mm
- 360° adjustable angle.



### **ALD-08 Bicycle Light Helmet Holder**

Applicable to BC21R V2.0, BC25R, BC30R, BC35R, BC30, BC30 V2.0.

- The fitted cable ties are applicable to a variety of bicycle helmets.
- Push and pull for one-second assembly and disassembly.
- Nylon and fiberglass high toughness, strength and durability.
- Weight: 0.39 oz / 11 g.
- Size: 2.87" x 2.20" x 0.55" / 73 x 56 x 14 mm.



### **ALD-10 Bicycle Light Holder with GoPro Interface**

The holder is lightweight, and the bicycle light can be easily fixed with a single push. It is applicable to all Fenix bicycle lights.

- International GoPro interface.
- Easy assembly.
- Compact and lightweight.
- Stable and reliable.



#### **ALG-03 V2.0 Headlamp Attachment**

ALG-03 V2.0 headlamp attachment is specifically designed for headlamp fixation to outdoor or industrial work helmets. It enables fast and convenient attachment and detachment of headlamps to and from the helmet and allows adjustment of the lighting angle of the headlamps.

- Made of quality nylon durable and eco-friendly.
- Included TESA adhesive tapes.



#### **ALL-01 Soft Flashlight Lanyard**

ALL-01 is a flashlight lanyard made of nylon and silicone sleeves. The length of the nylon cord and the silicone sleeves can be adjusted as needed. This flashlight lanyard is very comfortable to the hands and features non-slip as well.

- Applicable products: SD11, SD20, TK47UE, TK47, TK72R, TK75, RC40.
- Size: 0.35" Tube diameter x 9.25" Length (9 x 235 mm).
- Weight: 0.42 oz / 12 g.



### **ALW-01 Wrist Flashlight Holder**

The Fenix ALW-01 wrist flashlight holder is a wearable helper that is designed to hold a small flashlight with a body clip on your arm or your wrist. Constructed from durable PC material, the 360° adjustable flashlight holder is flexible for perfect hands-free illumination. The wrist strap is made of durable Nylon yarn, which is wear-resistant and comfortable to wear, and the adjustable range of the wrist strap is 140 - 200 mm. This wrist flashlight holder can be freely worn on the left or right hand.

- Body size: 2.09" x 1.77" x 0.83" / 53 x 45 x 21.2 (Length x Width x Thickness).
- Wrist strap size: 9.06 x 1.57" / 230 (±5) x 40 (±1) mm (Length x Width).
- Adjustable range of the wrist strap: 140 200 mm.
- Body weight: 0.56 oz / 16 g, wrist weight: 0.32 oz / 9 g; 0.88 oz / 25 g in total.

# FENIX ACCESSORIES COMPATIBILITY GUIDE

	Battery	Battery Holder	Diffus	ser Tip	Filter A	Adapter	Traffic	Wand		Rail I	Mount		Remote	Switch
MODEL	ARB	ALF		OD	AC	OF	A	OT		Α	LG		Al	ER .
	L16 L18 L2 6340) (18650) (217				S+	М	S+	M	00	15	16	18	02 V2.0	
lashlight - E Seri		00)	_											
E01 V2.0														
E02R														
E03R V2.0														
E05R														
E09R														
E12 V2.0														
E18R V2.0														
E20 V2.0														
E28R														
E35 V3.0														
E35R														
E-CP														
E-SPARK														
E-STAR														
Flashlight - LD Ser	ries		_	T			T	ı			1		_	
LD02 V2.0														
LD15R														
LD22 V2.0														
LD30														
Flashlight - PD Se	eries				T I	I	T	I	<u> </u>	Т	T	Т	T	
PD25R		_												
PD32 V2.0														
PD35 V3.0														
PD35R													-	
PD36R PRO														
PD36R														
PD36 TAC														
PD40R V2.0														
UC35 V2.0														
TK11 TAC	ries		1											
TK11 TAC TK16 V2.0							-							
TK20R V2.0							-						-	
TK20K V2.0												+	-	
TK26R														
TK30														
TK35UE V2.0														
Flashlight - HT Se	eries													
HT18							T			Τ				
HT30R														
Flashlight - LR Se	eries													
LR35R			T				T			Τ		Τ	Τ	
LR40R														
LR50R														
LR60R														
LR80R														
.Kouk														

# FENIX ACCESSORIES COMPATIBILITY GUIDE

	· ·	Battery	Batter Holde	y r C	Diffuser Tip	Filter	Adapte	r Tra	ffic Wand		Rail	Mount		Remo	te Switch
MODEL		ARB	ALF		AOD	T /	AOF		AOT		Α	LG		1	\ER
	L16 (16340)	L18 L2 (18650) (217		_	V2.0 M	S+	М	S+		00	15	16	18		03 V2.0
Flashlight - WF	( /	(10030) (211	00)												
WF05E															
WF11E															
WF26R															
WF30RE															
lashlight - WT	Γ Series														
WT16R															
WT25R															
actical Light -	- GL Series														
GL06															
GL19R															
GL22															
leadlamp - HL	. Series										T				
HL16															
HL18R-T							_					-	-		
HL32R V2.0															
HL40R															
leadlamp - HI	M Series		<u> </u>	<u> </u>		1	<u> </u>	T	1	T	T	T	T	1	T
HM23															
HM50R V2.0															
HM60R															
HM61R V2.0			-												
HM65R															
HM65R-T															
HM70R HM71R															
leadlamp - HF	2 Series														
HP16R	Jeries			Т		T	T			T			Т		T
HP25R V2.0										<del>                                     </del>					
HP30R V2.0															
leadlamp - Wi	H Series														
WH23R						T	$\top$			Τ		Т	Т		T
icycle Light -	BC Series														
BC05R V2.0															
BC21R V3.0															
BC25R															
BC26R															
BC30R 2017															
BC30 V2.0															
Camping Lante	ern - CL Se	eries													
CL20R															
CL26R															
CL28R															
CL30R															

# **FENIX PRODUCTS SPECIFICATION CHART**

MOI	DEL	OUTPUT	RUN	TIME	DISTANCE
			Alkaline Battery	Ni-MH Battery	
	High	100 lm	50 min	50 min	35 m
E01 V2.0	Med	25 lm	4 h 50 min	4 h 30 min	19 m
	Low	5 lm	25 h	23 h	9 m
E02R	High	200 lm	25 r		49 m
	Low	15 lm	6.5		13 m
	Burst	400 lm	/		64 m
E05R	High	150 lm	55 r		40 m
	Med	25 lm	5		17 m
	Low	3 lm	30	h	8 m
	Burst	600 lm	/	'	124 m
	High	300 lm	1.5	5 h	91 m
E09R	Med	100 lm	4	h	56 m
	Low	25 lm	16	h	28 m
	Moonlight	3 lm	70	h	9 m
	High	160 lm	1	h	68 m
E12 V2.0	Med	30 lm	13	h	28 m
	Low	5 lm	70	h	12 m
	•		Alkaline Battery		
	High	350 lm	3 h 45 min	1 h 30 min	126 m
E20 V2.0	Med	150 lm	11 h 15 min	5 h 30 min	76 m
	Low	30 lm	93 h 35 min	34 h 30 min	35 m
	Eco	5 lm	200 h	140 h	15 m
	Turbo	1500 lm	2 h 5		200 m
	High	800 lm	2 h 30		140 m
	Med	350 lm	6		90 m
E28R	Low	150 lm	17 h 1		61 m
	Eco	30 lm	73 h 3	5 min	28 m
	Strobe	1500 lm	/	1	/
	Turbo	3000 lm	1 h 15	5 min	240 m
	High	1200 lm	2 h 40	) min	150 m
E35 V3.0	Med	450 lm	7	h	90 m
L33 V3.0	Low	150 lm	20	h	50 m
	Eco	50 lm	50	h	30 m
	Strobe	3000 lm	,	1	/
	Turbo	1600 lm	2 h 30	) min	222 m
	High	350 lm	8 h 30	) min	105 m
	Med	150 lm	20	h	69 m
E-CP	Low	30 lm	84	h	33 m
	Eco	3 lm	504	4 h	10 m
	Strobe	1600 lm		1	/
	High	100 lm	3 h 20		30 m
E CDADIA	Med	30 lm	11	16 m	
E-SPARK	Low	5 lm	52		7 m
	Red	5 lm	14		/
	Red Flash	5 lm	/		/

MO	DE	L	OUT	PUT	RUN	TIME	DISTANC
		Turbo	100	) lm	/		40 m
		High	20	lm	10	h	18 m
E-STAR		Med	3	lm	60 h	/∞	7 m
		Low	1	lm	120 h	1/∞	4 m
					Alkaline Battery		
		High		lm	40 min	45 min	48 m
LD02 V2.0		Med		lm	2 h 40 min	2 h 55 min	27 m
		Low V Light		lm mW	75 h 45 h 4 h 3 h		6 m
		Turbo		) lm	1 h 20		85 m
	Whi	High		) lm	2 h 50		46 m
	White Light	Med		lm	13 h 2		23 m
	ght			lm	110		6 m
LD15R		Low		lm	30		5 m
	Red Ligh	Red Light					
	Light	Signal		lm Im	/	,	/
		SOS	AA AA	ARB-L14	AA	/	
		Turbo	/	800 lm	/	ARB-L14-1100U 54 min	214 m
	General	High	350	) lm	1 h 15 min	1 h 40 min	142 m
LD22 V2.0	≤	Med	100	) lm	5 h 50 min	7 h	76 m
	ode	Low	30	lm	19 h 45 min	22 h 20 min	43 m
		Eco	2	lm	190 h	220 h	11 m
	Flash I	Strobe	350 lm	800 lm	/	/	/
	Mode	sos	100 lm	100 lm	/	/	/
i i		Turbo	160	0 lm	1 h 25	i min	205 m
		High	800	lm (	1 h 50	150 m	
		Med	350	lm (	5 h 20	) min	95 m
LD30		Low	150	lm (	17 h 1	60 m	
		Eco	30	lm	70	25 m	
	,	Strobe	160	0 lm	/	/	
		SOS	30	lm	/	1	/
		Turbo	350 lm 5 h 20 min  150 lm 17 h 10 min  30 lm 70 h  1600 lm /  30 lm /  800 lm 44 min	250 m			
		High	350	) lm	1 h 30	) min	164 m
		Med	150	) lm	2 h 50	) min	107 m
PD25R		Low		lm	16	h	48 m
		Eco	5	lm	70	h	19 m
	-	Strobe	800	) lm	/	1	/
		High		0 lm	2 h 40		395 m
DD33		Med		) lm	5 h 20		218 m
PD32 V2.0		Low		lm	82		55 m
, <del>-</del>	_	Strobe		0 lm	/	/	
	`				,		

MOI	DEL	-	OUTPUT	Ŕl	JNTIME	DISTANCE
	-	Turbo	1700 lm	1 h	25 min	357 m
		High	600 lm	2 h	35 min	216 m
PD35 V3.0		Med	150 lm	8 h	30 min	109 m
. 200 10.0		Low	50 lm	26	h 25 min	63 m
		Eco	5 lm	:	230 h	20 m
	S	Strobe	1700 lm		/	/
	1	Turbo	1600 lm	2 h	50 min	283 m
		High	800 lm	5 h	1 49 min	197 m
DDSCD		Med	350 lm	8 H	1 24 min	128 m
PD36R		Low	150 lm		26 h	82 m
		Eco	30 lm		115 h	35 m
	S	Strobe	1600 lm		/	/
	7	Turbo	2800 lm	3 h	30 min	380 m
		High	1000 lm	3 h	55 min	225 m
PD36R Pro		Med	350 lm	8 1	15 min	130 m
PD30K PIO		Low	150 lm		19 h	90 m
		Eco	30 lm		42 h	40 m
	S	Strobe	2500 lm		/	/
	Tactic	High	2000 lm	3 h	10 min	225 m
	actical Mod	Strobe	2000 lm		/	/
	TO .	Turbo	3000 lm	1 h	30 min	274 m
		High	1000 lm	3 h	15 min	160 m
PD36 TAC	Duty	Med	350 lm	10	h 10 min	92 m
	Duty Mode	Low	150 lm	18	h 45 min	59 m
	Ф	Eco	30 lm	43 h 10 min		25 m
		Strobe	2000 lm		/	/
	7	Turbo	3000 lm	2 h	1 40 min	405 m
		High	1000 lm	3 h	230 m	
PD40R		Med	350 lm	8 1	137 m	
V2.0		Low	30 lm	88	45 m	
	S	Strobe	2500 lm		/	/
		Γurbo	1000 lm	2	h 5 min	266 m
		High	350 lm		4 h	160 m
11625.42.2		Med	150 lm	9 h	1 55 min	98 m
UC35 V2.0		Low	50 lm	27	h 50 min	64 m
	Мо	onlight	1 lm	,	750 h	10 m
	S	Strobe	1000 lm		/	/
	Tactical	High	1600 lm		2 h	335 m
	cal Mod	Strobe	1600 lm		/	/
	e	High	1600 lm		2 h	335 m
TK11 TAC	Duty	Med	500 lm	4 h	1 30 min	195 m
	Duty Mode	Low	50 lm		h 30 min	60 m
	e	Strobe	1600 lm		1	/

M	MODEL		OUTPUT	RUNTIME	DISTANCE
		Turbo	3100 lm	2 h 40 min	380 m
		High	1000 lm	2 h 50 min	220 m
TV16.V2.0		Med	350 lm	8 h 20 min	125 m
TK16 V2.0		Low	150 lm	19 h 10 min	80 m
		Eco	30 lm	43 h 20 min	40 m
		Strobe	3100 lm	/	/
		Turbo	3000 lm	2 h 50 min	475 m
		High	1000 lm	3 h 10 min	265 m
TK20R		Med	350 lm	7 h	150 m
V2.0		Low	150 lm	21 h 20 min	100 m
		Eco	30 lm	48 h	45 m
		Strobe	3000 lm	/	/
	Tactica	Turbo	2800 lm	3 h*	540 m
	Factical Mode	Strobe	2500 lm	/	/
		High	1000 lm	4 h*	315 m
TK22 TAC	Du	Med	350 lm	8 h 10 min	188 m
	Duty Mode	Low	150 lm	18 h 30 min	120 m
	ode	Eco	30 lm	49 h 30 min	55 m
		Strobe	2500 lm	/	/
		Turbo	1500 lm	1 h 15 min	350 m
		High	350 lm	4 h 27 min	170 m
		Med	150 lm	10 h 18 min	110 m
TK26R		Low	10 lm	100 h	30 m
		Strobe	1500 lm	1	/
	F	Red Light	150 lm	4 h 10 min	30 m
	Gı	reen Light	200 lm	5 h	40 m
		High	500 lm	3 h	1200 m
TK30		Low	100 lm	6 h	600 m
		Strobe	500 lm	/	/
	Tactica	Tactical	3500 lm	1 h 50 min	320 m
	l Mode	Strobe	3500 lm	/	/
		Turbo	5000 lm	1 h 40 min	400 m
TK35UE		High	2000 lm	2 h	250 m
V2.0	Duty Mode	Med	800 lm	4 h	160 m
	Mode	Low	350 lm	13 h 40 min	100 m
		Eco	30 lm	85 h	32 m
		Strobe	3500 lm	/	/
		Turbo	10000 lm	1 h 25 min	500 m
		High	3000 lm	1 h 35 min	270 m
ו מצבח		Med	1200 lm	3 h 15 min	170 m
LR35R		Low	450 lm	8 h 20 min	105 m
		Eco	50 lm	80 h	30 m
		Strobe	10000 lm	/	/

# **FENIX PRODUCTS SPECIFICATION CHART**

МО	DE	L	OUTPUT	RUNTIME	DISTANCE
		Turbo	12000 lm	1 h 50 min	950 m
	G	High II	6000 lm	2 h 20 min	690 m
	enera	High I	3000 lm	2 h 40 min	480 m
1.0500	General Mode	Med	1000 lm	7 h 40 min	280 m
LR50R	de	Low	350 lm	24 h	165 m
		Eco	50 lm	58 h	70 m
	Funct	Turbo	12000 lm	1 h 50 min	950 m
	Functional Mode	Strobe	6000 lm	/	/
	Mode	SOS	350 lm	/	/
		Turbo	18000 lm	2 h	1130 m
	General Mode	High	12000 lm	2 h 15 min	920 m
	l Mod	Med	6000 lm	2 h 50 min	650 m
	de	Low	3000 lm	5 h 10 min	465 m
LR80R		High	1000 lm	15 h 40 min	265 m
		Med	450 lm	39 h	175 m
	Functional Mode	Low	150 lm	92 h	105 m
	nal Mo	Eco	50 lm	300 h	50 m
	ode	Strobe	6000 lm	/	/
		SOS	150 lm	/	/
		High	85 lm	11.5 h	54 m
WF05E		Med	30 lm	35 h	29 m
		Low	10 lm	80 h	18 m
		High	200 lm	10 h	185 m
WF11E		Med	100 lm	29.5 h	141 m
		Low	30 lm	70 h	81 m
		High	280 lm	6 h 50 min	170 m
WF30RE		Med	120 lm	15 h 40 min	120 m
WISOKE		Low	30 lm	120 h	58 m
	,	Strobe	280 lm	/	/
	Ge	Turbo	3000 lm	2 h 41 min*	450 m
	General	High	1000 lm	2 h 47 min	264 m
WF26R	l Mode	Med	350 lm	8 h 56 min	155 m
WIZOK		Eco	30 lm	44 h 8 min	47 m
	Flash Mode Spotlight Mode	Strobe	3000 lm	/	/
	Mode	SOS	100 lm	/	/
		High	300 lm	3 h 50 min	115 m
	ight M	Med	100 lm	9 h 20 min	65 m
WT16R	ode	Low	30 lm	30 h	35 m
WITOK	Flood	High	300 lm	3 h 50 min	23 m
	Floodlight Mode	Low	100 lm	9 h 20 min	14 m
	lode	Yellow Flash	10 lm	1	/
		Turbo	1000 lm	3 h 40 min	220 m
	General Mode	High	400 lm	4 h 50 min	145 m
WT25R		Med	150 lm	11 h	85 m
2510		Low	50 lm	29 h	50 m
		Strobe	1000 lm	/	/
	de	SOS	50 lm	/	/

МО	DE	L	OUTPUT	RUNT	ГІМЕ	DISTA	NCE
	Spd			Li-polymer			
	otligh	High	500 lm	3 h	4 h	82	
III 10D T	t Mode	Med	200 lm	8 h	11 h	54	
HL18R-T	200	Low	70 lm	20 h	20 h	35 m	
	loodlight Iode	Low	30 lm 4 lm	30 h 300 h	43 h 300 h	12 5 r	
	콨	303	7 (11)	30011	30011	Spotlight	
	Ger	High	300 lm	4 h 30	) min	96 m	29 m
	neral	Med	130 lm	11	. h	64 m	19 m
	General Mode	Low	70 lm	22	h	46 m	14 m
HL40R	le	Eco	30 lm	50	h	30 m	9 m
	Mon	Reading	4 lm	200	0 h	10 m	4 m
	ctiona	SOS	30 lm	100	0 h	30 m	9 m
		Burst	600 lm	1 h 20	) min	147 m	43 m
		High	240 lm	8		63	
HM23		Med	70 lm	16	h	34	m
		Low	4 lm	100		9.5	
		Turbo	700 lm	1		115	
	¥	' '	400 lm	3		86	
	White Light	Med	130 lm	8		49	
HM50R	ight	Low	30 lm			23	
V2.0		LOW	5 lm				
	Red Lig	Red Light Red Flash	5 lm	120		6 r	
	्र <sub>व</sub>						
	Spot	Turbo	1300 lm	2		120	
HM60R	tlight	High	350 lm	8		60	
	Mod	Med	130 lm	18		36	
	de	Low	30 lm	54		18	
		High	350 lm	8	33		
	Functional Mode	Med 70 lm		24	15 m		
	al Moi	Red	5 lm	100	) h	5 r	n
	de	SOS	5 lm	200		5 r	
	Spot	Turbo	1000 lm	4		163	
	tligh	High	400 lm	22	101 m		
	it Mo	Med	130 lm	42		57	
HM65R	de	Low	50 lm	90		37	m
	Flood	High	400 lm	20		55	
	Floodlight Mode	Med	130 lm	48	h	30	m
	/lode	Low	8 lm	280		6 r	m
	Spotlight Mode	High	1300 lm	4	h	170	m
	light N	Med	400 lm	12	h	96	m
HM65R-T	/lode	Low	130 lm	24	h	55	m
	Flood	High	400 lm	12	h	54	m
	Floodlight Mode	Med	70 lm	33	h	23	m
	Mode	Low	5 lm	300	) h	6 r	n
	Ge	Turbo	1600 lm	4	h	186	m
	General Mode	High	500 lm	6		105	m
	Mod	Med	150 lm	30		53	
HM70R	е	Low	30 lm	100		26	
		Red Light	5 lm	400		51	
	Functional Mode	Med High	70 lm 400 lm	48		16 38	
	Mode	Red Flash	5 lm	800		5 r	
		Incu i lasii	5 (111	300	V 11	1 7	

	МО	DE	L	OUTPUT	RUNTIME	DISTANCE	
	Ge		Turbo	1250 lm	4 h	225 m	
	enera	Spotlight	High	400 lm	8 h	149 m	
HP16R	General Mode		Med	150 lm	12 h	88 m	
	de		Low	50 lm	36 h	52 m	
	П	卫	High	400 lm	8 h	48 m	
	Functional Mode	Floodlight Red	Med	150 lm	12 h	30 m	
	ional		Low	5 lm	300 h	6 m	
	Mod		Red Light	5 lm	300 h	6 m	
	е		Red Flash	5 lm	600 h	6 m	
		Spotlight	Turbo	1600 lm	2 h	290 m	
	General Mode		High	1000 lm	4 h	228 m	
	eral N		Med	400 lm	8 h	140 m	
	1ode		Low	150 lm	24 h	83 m	
HP25R			Eco	50 lm	56 h	59 m	
V2.0	П	Fle	High	400 lm	8 h	50 m	
	Functional Mode	Floodlight	Med	150 lm	24 h	30 m	
	ional	핥	Low	5 lm	400 h	8 m	
	Moc	Red	Red Light	5 lm	400 h	6 m	
	e	۵	Red Flash	5 lm	800 h	6 m	
	S		Turbo	2000 lm	6 h	251 m	
	Spotlight Mode		High	800 lm	12 h	156 m	
	ht Mo	Med		200 lm	34 h	78 m	
	de	Low		50 lm	120 h	42 m	
	Floo	High		1000 lm	10 h	78 m	
HP30R	odligh	Med		200 lm	34 h	34 m	
V3.0	Floodlight Mode	Low		50 lm	120 h	17 m	
	е	Turbo		3000 lm	5 h	270 m	
	Spot			1800 lm	6 h		
	دFloo		High			177 m	
	Spot&Flood Mode	_	Med	400 lm	17 h	85 m	
			Low	100 lm	60 h	45 m	
	Spotlight	High		300 lm	6 h 19 min	84 m	
			Med	120 lm	9 h 32 min	53 m	
	Mode		Low	30 lm	35 h 57 min	26 m	
WH23R	Floo		High	300 lm	6 h 19 min	35 m	
	Floodlight Mode		Med	70 lm	15 h 36 min	17 m	
	Mode		Low	5 lm	150 h	5 m	
	Spotli	ight	Turbo	600 lm	3 h 49 min	100 m	
	High Flash(Fast)			15 lm	35 h	100111	
	High Flash(Slow)			15 lm	25 h		
		High		15 lm	4.5 h		
BC05R V2.0	Low Flash(Fast)			5 lm	120 h	50 m	
	$\vdash$		Flash(Slow)	5 lm	80 h		
	Low			5 lm	16 h		
	Turbo			600 lm	2 h	106 m	
	High			350 lm	7 h	79 m	
BC25R	Med			150 lm	15 h	53 m	
	Low			50 lm	36 h	32 m	
			Flash	150 lm	/	/	

M	ODEL	OUTPUT	RUNT	IME	DISTANCE	
	Turbo	1200 lm	1200 lm 2 h 12 min		142 m	
BC21R V3.0	High	400 lm	6 h 30 min		80 m	
	Med	150 lm	11 h		49 m	
	Low	50 lm	33 h		28 m	
	Flash	400 lm	/		/	
	Turbo	1600 lm	3 h 30 min		169 m	
BC26R	High	600 lm	9 h 30 min		101 m	
	Med	200 lm	18 h		57 m	
	Low	50 lm	65 h		28 m	
	Flash	600 lm	/		/	
	Turbo	1800 lm	/		161 m	
	G High	1000 lm	2 h 40 min		122 m	
BC30R	Med Med	400 lm	7 h 20 min		76 m	
2017	General Mode  High  Med  Low	150 lm	16 h 10 min		47 m	
	Eco	50 lm	36 h		28 m	
	Flash	150 lm	1		/	
	Burst	2200 lm	/		187 m	
	High	1500 lm	2 h 18 min		155 m	
DC30.V3.0	Med	600 lm	6 h		96 m	
BC30 V2.0	Low	200 lm	16 h		56 m	
	Eco	50 lm	50 h		28 m	
	Flash	600/50 lm	/		/	
	ୁ Turbo	300 lm	6 h 12 h		15m (Max)	
	High Med .	130 lm				
CL20R	Med Med	40 lm	20 h			
CLZOIX	Low	1 lm	200 h			
	Flash constanton	1.5 lm	/			
	constanton	1.5 lm	100 h			
	High	400 lm	5 h			
	Med	150 lm	15 h			
	Low	40 lm	30 h			
CL26R	Front	25 lm	58 h		25m (Max)	
CLZUK	Down I	3 lm	240 h			
	Down II	25 lm	58 h			
	Red	1 lm	200 h			
	Red Flash	1 lm	400 h			
	White	2000 lm	9 h		58 m	
CL28R	High Med Low	1000 lm			42 m	
		10 lm	360 h		4 m	
	Red Constant-on Red Flash	9 lm 9 lm	170 h 340 h		4.5 m	
CL30R	i kcu i tasii	3 (111	2600mAh	3500mAh	/	
	Turbo	650 lm	4 h 30 min	6 h	35m (Max)	
	High	350 lm	9 h	12 h		
	Med	100 lm	38 h	51 h		
	Low	50 lm	70 h	93 h		
	Eco Flash	10 lm 100 lm	300 h 70 h	400 h 93 h		
	1 (45)11	100 (111	1011	3311		

# **CUSTOMER SERVICE**

## Fenix Product Warranty Terms

## 15 Days Free Replacement

15 days free replacement: Fenix will replace a new product within 15 days of purchase for any manufacturing defects if problems come into being in normal use; We will replace it with the same model. If the model has been discontinued, customers will receive a product with a similar or improved model.

### **5 Years Free Repair**

5 years free repair: Fenix will offer free repair within 5 years for lights from the date of purchase if a problem develops with normal use. Different warranty periods for different products:

Product Type	Warranty
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (included rechargeable lights but not built-in battery)	5 years battery for 1 year
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (with built-in battery)	2 years (battery included)
Rechargeable batteries, chargers, bike mount, and remote pressure switch	1 year

### **Limited Lifetime Warranty**

Limited lifetime warranty: For lights past the free repair warranty period, we provide lifetime repairs but will charge for parts. The distributor will notify the customer of the cost of the part before repair.

## **Extended warranty service**

An extra 6-month warranty period is obtained once you have successfully registered on the official website for Fenixlight Limited (www.fenixlight.com), which only applies to flashlights, tactical lights, headlamps, bike lights and camping lanterns.

### **Warranty Certificate**

Customers requesting after-sales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

## The free warranty does not cover any damages or failure caused by:

- (1) Normal wear
- (2) Rough operation
- (3) Battery leakage
- (4) Any defects or damages caused by the improper operations include but not limited to the operation which doesn't comply with the warranty or notes shown in the product specification. For example, the product specification will describe that please don't disassemble the sealed head, as doing so can damage the flashlight and will void the warranty.
- (5) Any defects or damage led by other behaviors which can not be controlled by Fenix reasonably.

## For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions) service\_1@fenixlight.com (Asia/Oceania/Africa regions) Tel: +86 400 8866 093 /+86 755 2963 1193

# PHOTOS TAKEN Cover: 郑用钿 Illustration: Adrian Alessandro-Farese Azhari Brendon Wainwright Br. mediacell Carlos SERRANO Chechu Erdi Ethan Frontlinetrace Gareth Owen IG@wildsoul IG@Frankadventure Jack Kevin Stolzmann Lee McGrath Ramon Seliga Spencer Victor 郑用钿 东子爱拍的 我为摄狂 **CONTACT US Facebook** Instagram YouTube